

# UNCLASSIFIED

|   |              |
|---|--------------|
| AD NUMBER   |              |
| AD010030  |              |
| CLASSIFICATION CHANGES  |              |
| TO:   | unclassified |
| FROM:   | confidential |
| LIMITATION CHANGES  |              |
| TO:<br>Approved for public release; distribution is unlimited.  |              |
| FROM:<br>Distribution authorized to DoD only;<br>Administrative/Operational Use; 27 FEB 1953.<br>Other requests shall be referred to Office of<br>the Chief of Ordnance, Department of the Army,<br>Washington, DC 20310. Pre-dates formal DoD<br>distribution statements. Treat as DoD only. |              |
| AUTHORITY   |              |
| USAMC ltr dtd 26 Mar 1981; USAMC ltr dtd 26 Mar 1981  |              |

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

AD \_\_\_\_\_

DEFENSE DOCUMENTATION CENTER

FOR

SCIENTIFIC AND TECHNICAL INFORMATION

CAMERON STATION ALEXANDRIA, VIRGINIA

DOWNGRADED AT 3 YEAR INTERVALS:  
DECLASSIFIED AFTER 12 YEARS  
DCD DIR 5200.10



UNCLASSIFIED



THIS REPORT HAS BEEN DECLASSIFIED  
AND CLEARED FOR PUBLIC RELEASE.

DISTRIBUTION A  
APPROVED FOR PUBLIC RELEASE;  
DISTRIBUTION UNLIMITED.

**CONFIDENTIAL**  
**Security Information**

**NORTH AMERICAN INSTRUMENTS INC.**

**PRELIMINARY WIND STUDIES FOR LOKI**

**By**

**Bernard Helfand**

**Design and Development of a Wind Correction Computer  
For Use with M33 Director  
in the Fire Control for LOKI Rockets**

**February 27, 1953**

**Quarterly Report for Second Quarter  
October 1, 1952 to December 30, 1952**

**Contract No. DA-04-495-Ord-352  
Sub-RAD Order No. ORDTU 2-1106-7  
Ordnance Project No. TU2-1012**

**CONFIDENTIAL**  
**Security Information**

**CONFIDENTIAL**  
**Security Information**

**TABLE OF CONTENTS**

|              | <b><u>Page</u></b> |
|--------------|--------------------|
| Introduction | 1                  |
| Discussion   | 2                  |
| Conclusions  | 6                  |

**ILLUSTRATIONS**

|               |  |
|---------------|--|
| Fig. 1        | LOKI Crosswind Influence Function  |
| Fig. 2        | Deviation at Burnout Due to Unit Crosswind                                 |
| Figs. 3-6     | Wind Profile Sequences   |
| Figs. 7A-10A  | Time History of Wind and Deviation at Burnout                              |
| Figs. 7B-10B  | Time History of 4-Second Average Wind and<br>Deviation at Burnout          |
| Figs. 11A-14A | Deviation at Burnout vs. Wind  |
| Figs. 11B-14B | Deviation at Burnout vs. 4-Second Average Wind                             |
| Fig. 15       | Departure from Regression Line - Wind at 50-foot<br>Level                  |
| Fig. 16       | Departure from Regression Line - 4-Second Average<br>Wind at 50-foot Level |

**CONFIDENTIAL**  
**Security Information**

**CONFIDENTIAL**  
**Security Information**

**INTRODUCTION**

The design of a computer system for LOKI which will automatically correct for the effect of wind during the boost phase of flight requires a knowledge of the function relating deviation at burnout with the wind distribution along the trajectory as well as a knowledge of the nature of the wind distribution at the time of flight. The function relating deviation at burnout with the distributed wind was determined in an earlier report on this project, Ref. 1, and was shown as a relation between influence coefficient (angular deviation of flight path direction at burnout from direction at launch per unit crosswind per unit distance increment along trajectory) and distance of rocket from launcher.

The purpose of this report is to examine the effects of arbitrary and observed wind distributions on LOKI, based on the foregoing influence function, with a view to establishing the basis for a practical field wind measuring technique to gather and transmit wind information to the correction computer.

From time series of wind profiles obtained experimentally, burnout deviations are computed and compared with concurrent winds at fixed levels for both instantaneous and time averaged winds to determine the feasibility of a correction method based on a linear relationship between burnout deviation and wind at one level. Although the available wind data were limited to about 150 cases and covered only the first 250 feet of trajectory accounting for 50% of the total cor-

**CONFIDENTIAL**  
**Security Information**

CONFIDENTIAL  
Security Information

-2-

rection, the high correlations found indicate a strong possibility of success for this method. Further work with more extensive observations will be necessary to substantiate these results and to explore other possibilities for wind specification such as block (space and time) averaging and to provide proportionality constants and limits of accuracy for working computer systems.

DISCUSSION

The total flight path angular deviation of LOKI due to wind during burning is given by:

$$\delta = \int_0^s [\Delta\gamma_r(s) W(s)] ds$$

where  $\Delta\gamma_r(s)$  is the wind influence coefficient and  $W(s)$  is the wind component perpendicular to the trajectory at a point on the trajectory distant  $s$  from the launcher. In the derivation of the  $\Delta\gamma_r(s)$  function, Ref. 1, the wind component along the trajectory was assumed to be negligible in its effect on deviation at burnout, due to the high speed and forward acceleration of LOKI. A plot of  $\Delta\gamma_r(s)$  is shown in Fig. 1.

The cumulative effect of a constant crosswind during burning is shown in Fig. 2 when  $\delta$  is plotted against  $s$  for unit crosswind. Of the total deviation 0.8 mil, 50% is due to the first 250 feet of trajectory, while 94% is accounted for by the first 1000 feet.

CONFIDENTIAL  
Security Information

CONFIDENTIAL  
Security Information

-3-

An initial study of  $\delta$  variation was made using a synthetic wind made up of a steady  $1/7$  power law component and a superimposed sinusoidal gust component, varying wave length and amplitude. The assumed wind is described by:

$$W(s) = W_0 \left( \frac{s}{s_0} \right)^{1/7} \left[ 1 + K \sin \frac{2\pi}{\lambda} s \right], \quad 0 < s < 1500 \text{ ft.}$$

$$W(s) = W_{1500}, \quad 1500 < s < 2000 \text{ ft.}$$

where  $W(s)$  = wind velocity at height  $s$

$s_0$  = reference height, 50 ft. at which

$\lambda$  = wave length of gust component, ft.

$K$  = gust amplitude factor

Values of deviation were computed for

$\lambda = 50, 100, 200$  and  $400$  ft. with  $K = 0, 0.5$  and  $1.0$

Results are summarized in the following table

| Relative Deviation at Burnout |   |       |       |
|-------------------------------|---|-------|-------|
| $L \backslash K$              | 0 | 0.5   | 1.0   |
| 50                            | 1 | 1.014 | 1.029 |
| 100                           | 1 | 1.027 | 1.043 |
| 200                           | 1 | 1.004 | 1.010 |
| 400                           | 1 | 1.042 | 1.084 |

CONFIDENTIAL  
Security Information

CONFIDENTIAL  
Security Information

-4-

Significant effects would undoubtedly be observed at values of  $\lambda$  greater than 400 feet and with the introduction of gust phase angle as a parameter. This investigation was not pursued further at this time, however, since the chief interest lies in the application to sampling requirements. It is evident from the small effect of the gust component on  $\delta$  for  $\lambda = 50$  and 100 feet, that for practical purposes the wind will be completely described by measurements at 25-foot intervals, the intervals that occur in the experimental data to be discussed.

From data published in Refs. 2 and 3, the vertical wind profiles shown in Figs. 3 to 6 were obtained. These show the time histories at one-second intervals, of the velocity distribution with height. The original measurements were made with pressure plate anemometers described in the foregoing references having an effective time constant of about 0.1 sec., located at 25-foot intervals on a 250-foot tower. Wind direction was not recorded, and the profiles do not exactly represent the crosswind in a fixed plane that would apply to a vertical trajectory. The assumption of constant direction leads to an exaggerated rather than smoothed profile. Four separate runs are included with velocities ranging from 14 to 54 mph, and all were obtained in winter storms in Michigan.

From the wind profiles, deviation sequences were calculated. The wind values at each measurement point were assumed to describe the wind in a layer ex-

CONFIDENTIAL  
Security Information

CONFIDENTIAL  
Security Information

-5-

tending  $12 \frac{1}{2}$  feet to either side (histogram distribution). Products of these values and the corresponding influence coefficient were summed to give the contribution of the wind in the first 250 feet of trajectory. This contribution is about 50% of the total that would be obtained if the integration were carried to burnout.

Time histories of deviation are plotted in Figs. 7A to 10A for the four runs along with concurrent winds at the 25, 50, 100, and 150-foot levels. These indicate a trend of wind velocity consistent with deviation. To better show the trend of a four-second average wind (arithmetic mean of the wind at time T, and the previous three observations) is plotted in Figs. 7B - 10B.

Deviation is plotted against wind velocity in Figs. 11A - 14A and against four-second average wind velocity in Figs. 11B - 14B. Regression lines are included determined by a least squares linear fit with Wind the independent variable. The limits within which 90% of the observations fall are also shown. These were determined assuming that the departure of  $\delta$  from the regression line follows a normal Gaussian distribution. Histograms showing the distribution corresponding to Figs. 12A and 12B are shown in Figs. 15 and 16. The following table summarizes the results:

CONFIDENTIAL  
Security Information



**CONFIDENTIAL**  
**Security Information**

-6-

| Wind<br>Measurement<br>Level | Wind<br>Deviation at Burnout         |                            |   | 4-Second Average Wind<br>Deviation at Burnout |                            |   |
|------------------------------|--------------------------------------|----------------------------|---|---|----------------------------|---|
|                              | Regression<br>Line Slope<br>mils/mph | Correlation<br>Coefficient | Deviation<br>Spread for<br>90% Obs.<br>mils | Regression<br>Line Slope<br>mils/mph          | Correlation<br>Coefficient | Deviation<br>Spread for<br>90% Obs.<br>mils |
| 25                           | .544                                 | .802                       | $\pm 4.9$                                   | .582  | .823                       | $\pm 4.4$                                   |
| 50                           | .399                                 | .805                       | $\pm 4.7$                                   | .419  | .836                       | $\pm 3.9$                                   |
| 100                          | .488                                 | .901                       | $\pm 3.3$                                   | .491  | .896                       | $\pm 3.2$                                   |
| 150                          | .441                                 | .939                       | $\pm 2.6$                                   | .446  | .945                       | $\pm 2.3$                                   |

**CONCLUSIONS**

It is apparent from the table that a correction based on the wind velocity at a fixed level and the corresponding regression line slope might be entirely reasonable in view of the small spread in wind deviation. The high correlations at 100 and 150 feet result from the secondary peak in the influence function near 150 feet and possibly from a tendency of the wind profile to "pivot" about this level.

**CONFIDENTIAL**  
**Security Information**

**CONFIDENTIAL**  
**Security Information**

-7-

Although the available wind data were obtained in one locality and covered only the first 250 feet of trajectory, accounting for 50% of the total effect, the high correlations do indicate a strong possibility of success for methods based on simple averages and limited sampling. Further work is being carried on first, to verify the influence function by comparison between experimental ballistic data and concurrent wind observations and second, to extend the statistical study. Large quantities of additional wind profile sequences, extending as far as 1000 feet, will be required for this purpose, and the use of correlation functions to describe the wind may be adopted to simplify the statistical analysis and to make the information generally useful.

**CONFIDENTIAL**  
**Security Information**

-8-

Reference

- (1) "LOKI Wind Response Analysis" by Donald L. Baker and Warren L. Phillips, January 15, 1953.
- (2) "Variation of Wind Velocity and Gusts with Height" by R. H. Sherlock, M. ASCE, Proceedings of American Society of Civil Engineers, Vol. 78, April 1952.
- (3) "Wind Structure in Winter Storms" by R. H. Sherlock and M. B. Stout, Journal of the Aeronautical Sciences, Vol. 5, 1937.

**CONFIDENTIAL**  
**Security Information**

CONFIDENTIAL  
SECURITY INFORMATION

FIGURE 1  
LORI CROSSWIND INFLUENCE FUNCTION


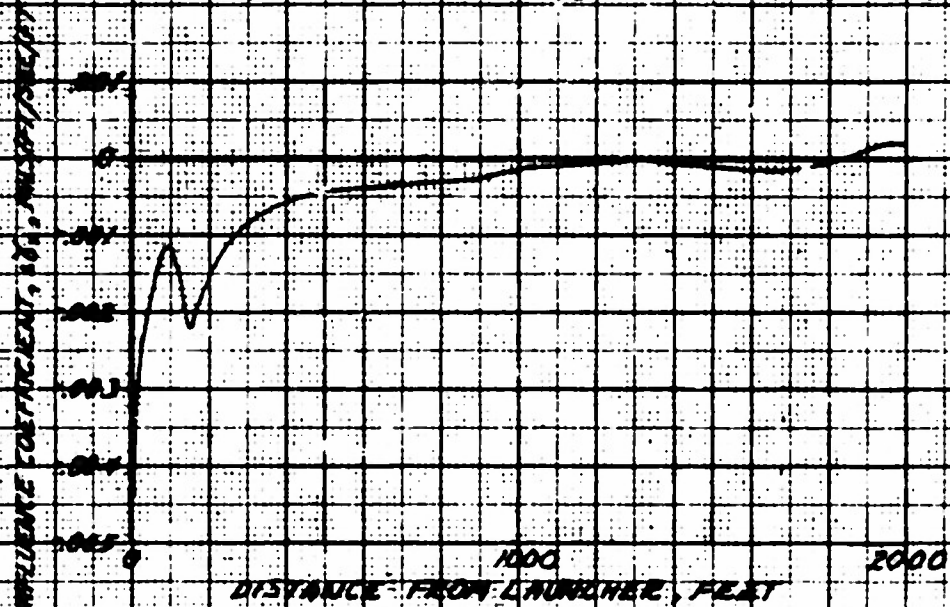


FIGURE 2  
DEVIATION AT BURNOUT  
DUE TO UNIT CROSSWIND

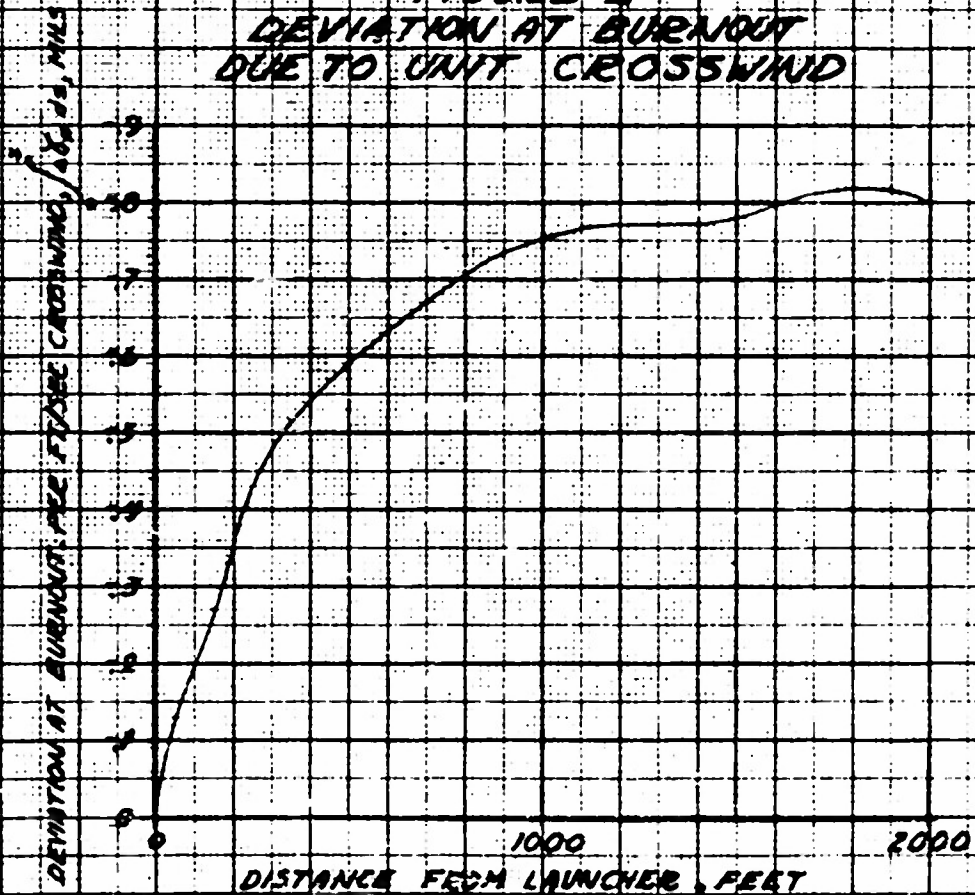

CONFIDENTIAL  
SECURITY INFORMATION

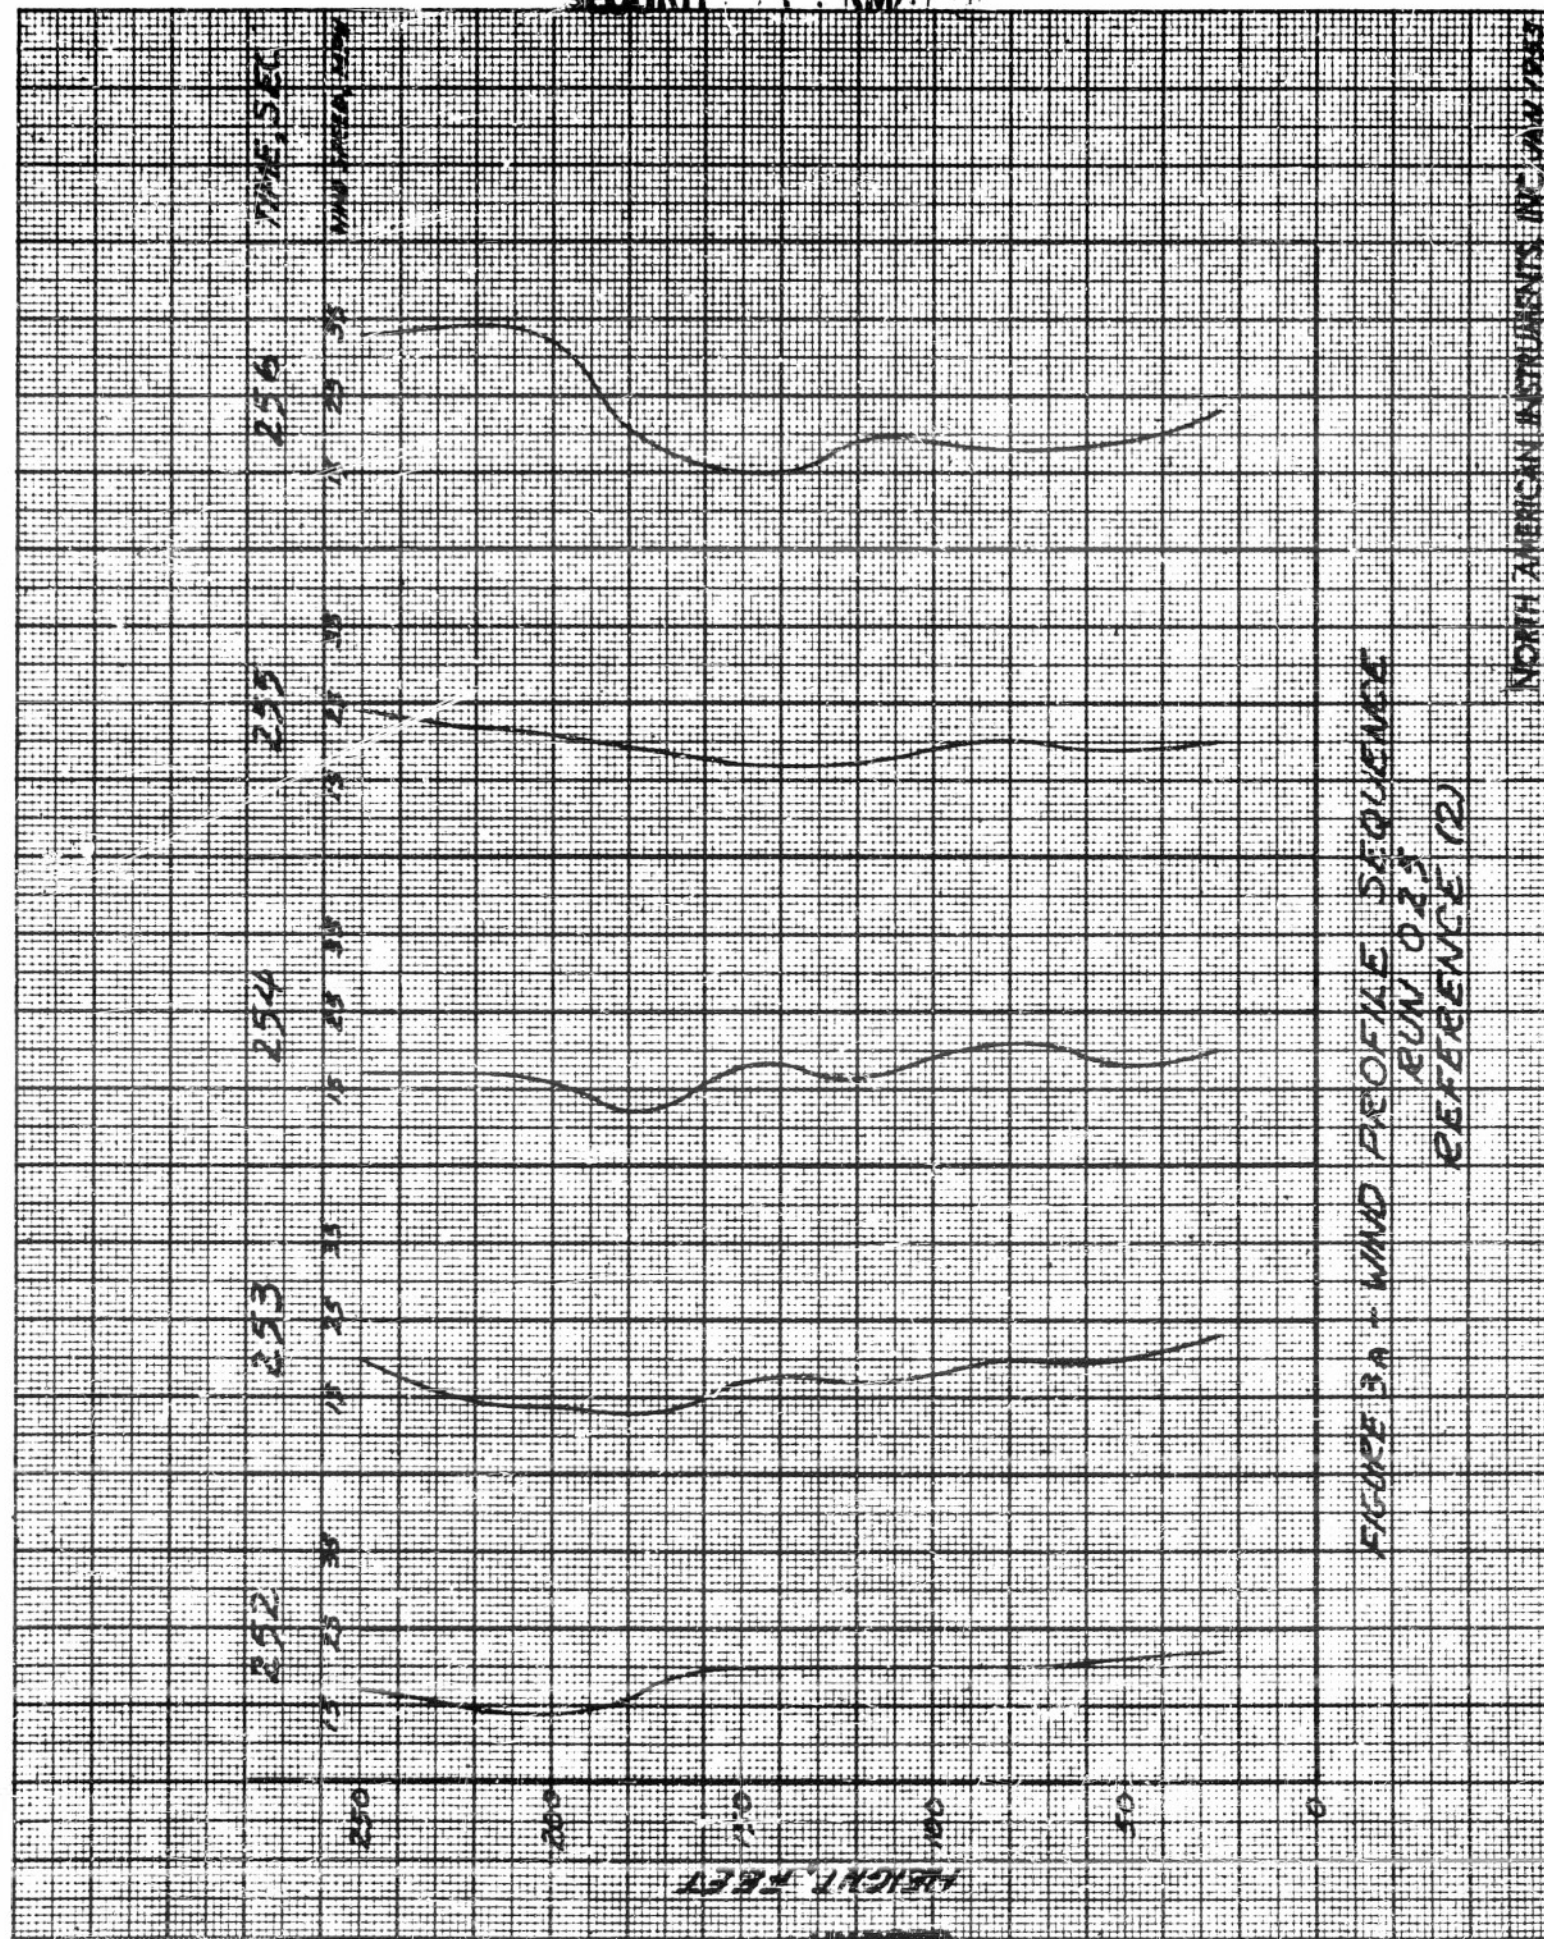


FIGURE 3A - WIND PROFILE SEQUENCE  
RUN 025  
REFERENCE (2)



CONFIDENTIAL  
SECURITY INFORMATION

TIME, SEC

261

260

259

258

257

WIND SPEED, MPH

35

30

25

20

15

10

5

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

0

HEIGHT, FEET

250

200

150

100

50

FIGURE 3B - WIND PROFILE SEQUENCE  
RUN 025  
REFERENCE (2)

NORTH AMERICAN INSTRUMENTS, INC. JAN 1963

CONFIDENTIAL  
SECURITY INFORMATION



**CONFIDENTIAL**  
**SECURITY INFORMATION**

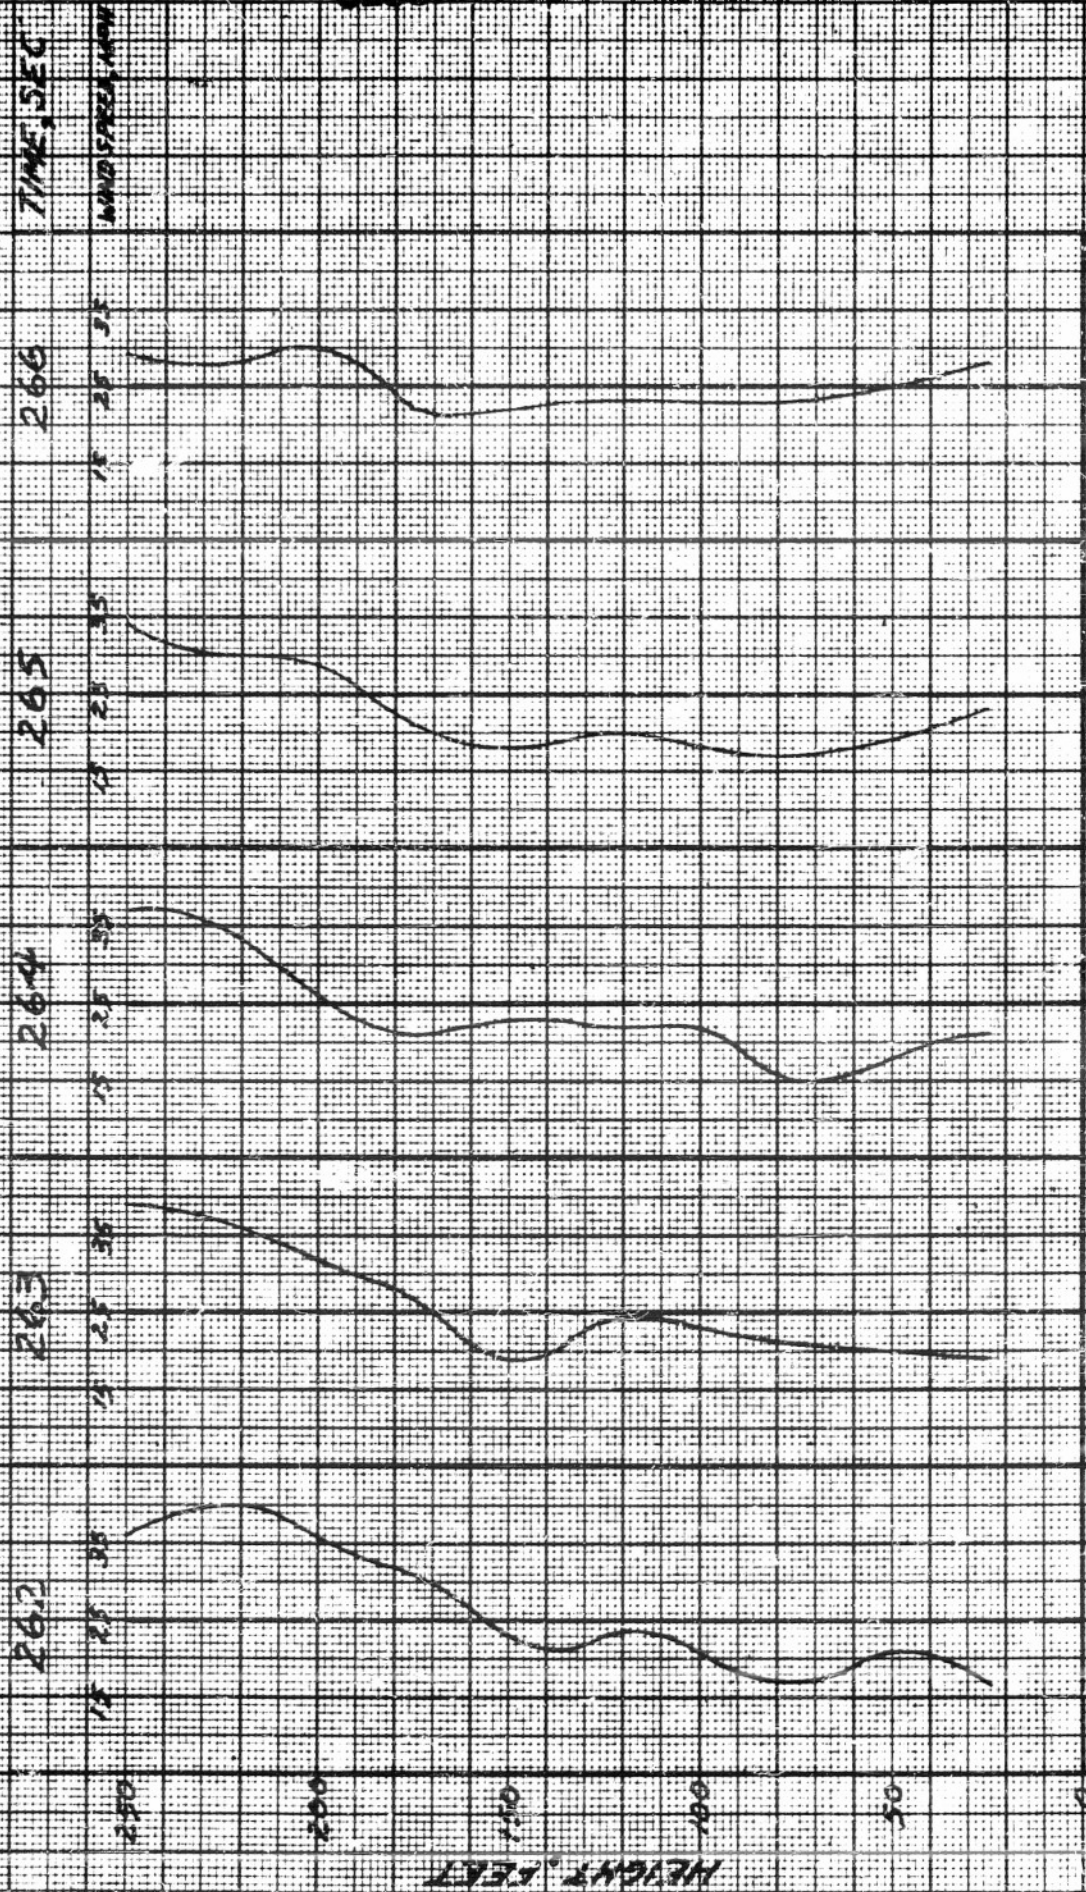


FIGURE 3C - WIND PROFILE SEQUENCE  
RUN 025  
REFERENCE (2)



CONFIDENTIAL  
SECURITY INFORMATION

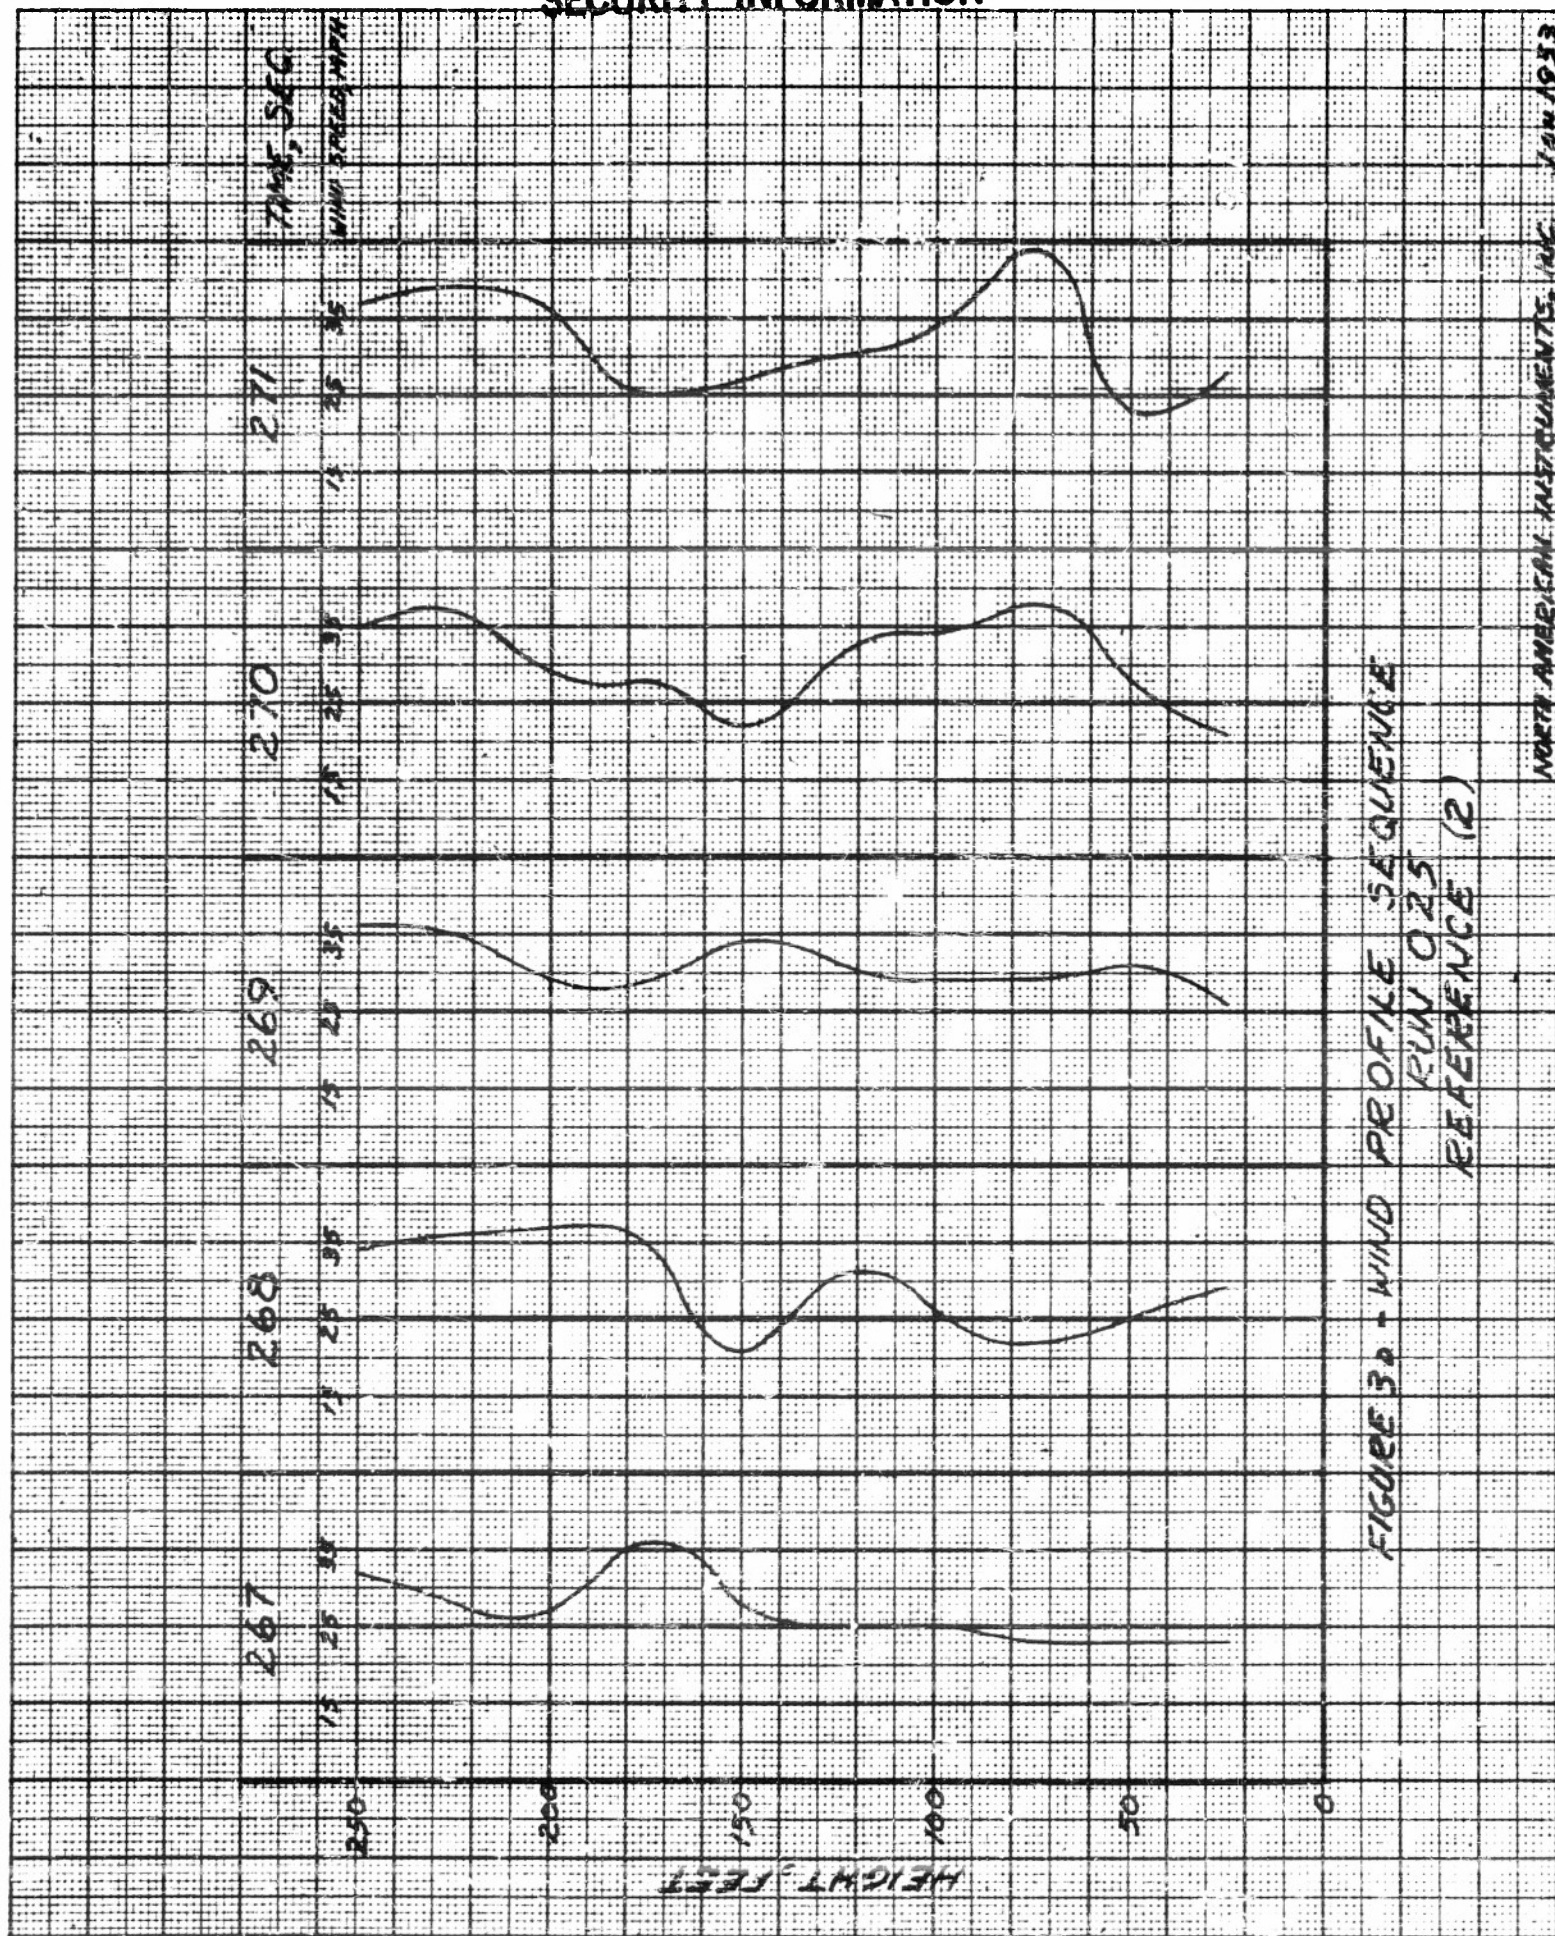


FIGURE 3d - WIND PROFILE SEQUENCE  
RUN 025  
REFERENCE (2)



**CONFIDENTIAL  
SECURITY INFORMATION**

276 TIME, SEC

275

274

273

272

271

270

269

268

267

266

265

264

263

262

261

260

259

258

257

256

255

254

253

252

251

250

249

248

247

246

245

244

243

242

241

240

239

238

237

236

235

234

233

232

231

230

229

228

227

226

225

224

223

222

221

220

219

218

217

216

215

214

213

212

211

210

209

208

207

206

205

204

203

202

201

200

199

198

197

196

195

194

193

192

191

190

189

188

187

186

185

184

183

182

181

180

179

178

177

176

175

174

173

172

171

170

169

168

167

166

165

164

163

162

161

160

159

158

157

156

155

154

153

152

151

150

149

148

147

146

145

144

143

142

141

140

139

138

137

136

135

134

133

132

131

130

129

128

127

126

125

124

123

122

121

120

119

118

117

116

115

114

113

112

111

110

109

108

107

106

105

104

103

102

101

100

99

98

97

96

95

94

93

92

91

90

89

88

87

86

85

84

83

82

81

80

79

78

77

76

75

74

73

72

71

70

69

68

67

66

65

64

63

62

61

60

59

58

57

56

55

54

53

52

51

50

49

48

47

46

45

44

43

42

41

40

39

38

37

36

35

34

33

32

31

30

29

28

27

26

25

24

23

22

21

20

19

18

17

16

15

14

13

12

11

10

9

8

7

6

5

4

3

2

1

0

-1

-2

-3

-4

-5

-6

-7

-8

-9

-10

-11

-12

-13

-14

-15

-16

-17


-18

-19

-20

**CONFIDENTIAL  
SECURITY INFORMATION**

160  
sh 6 of 6

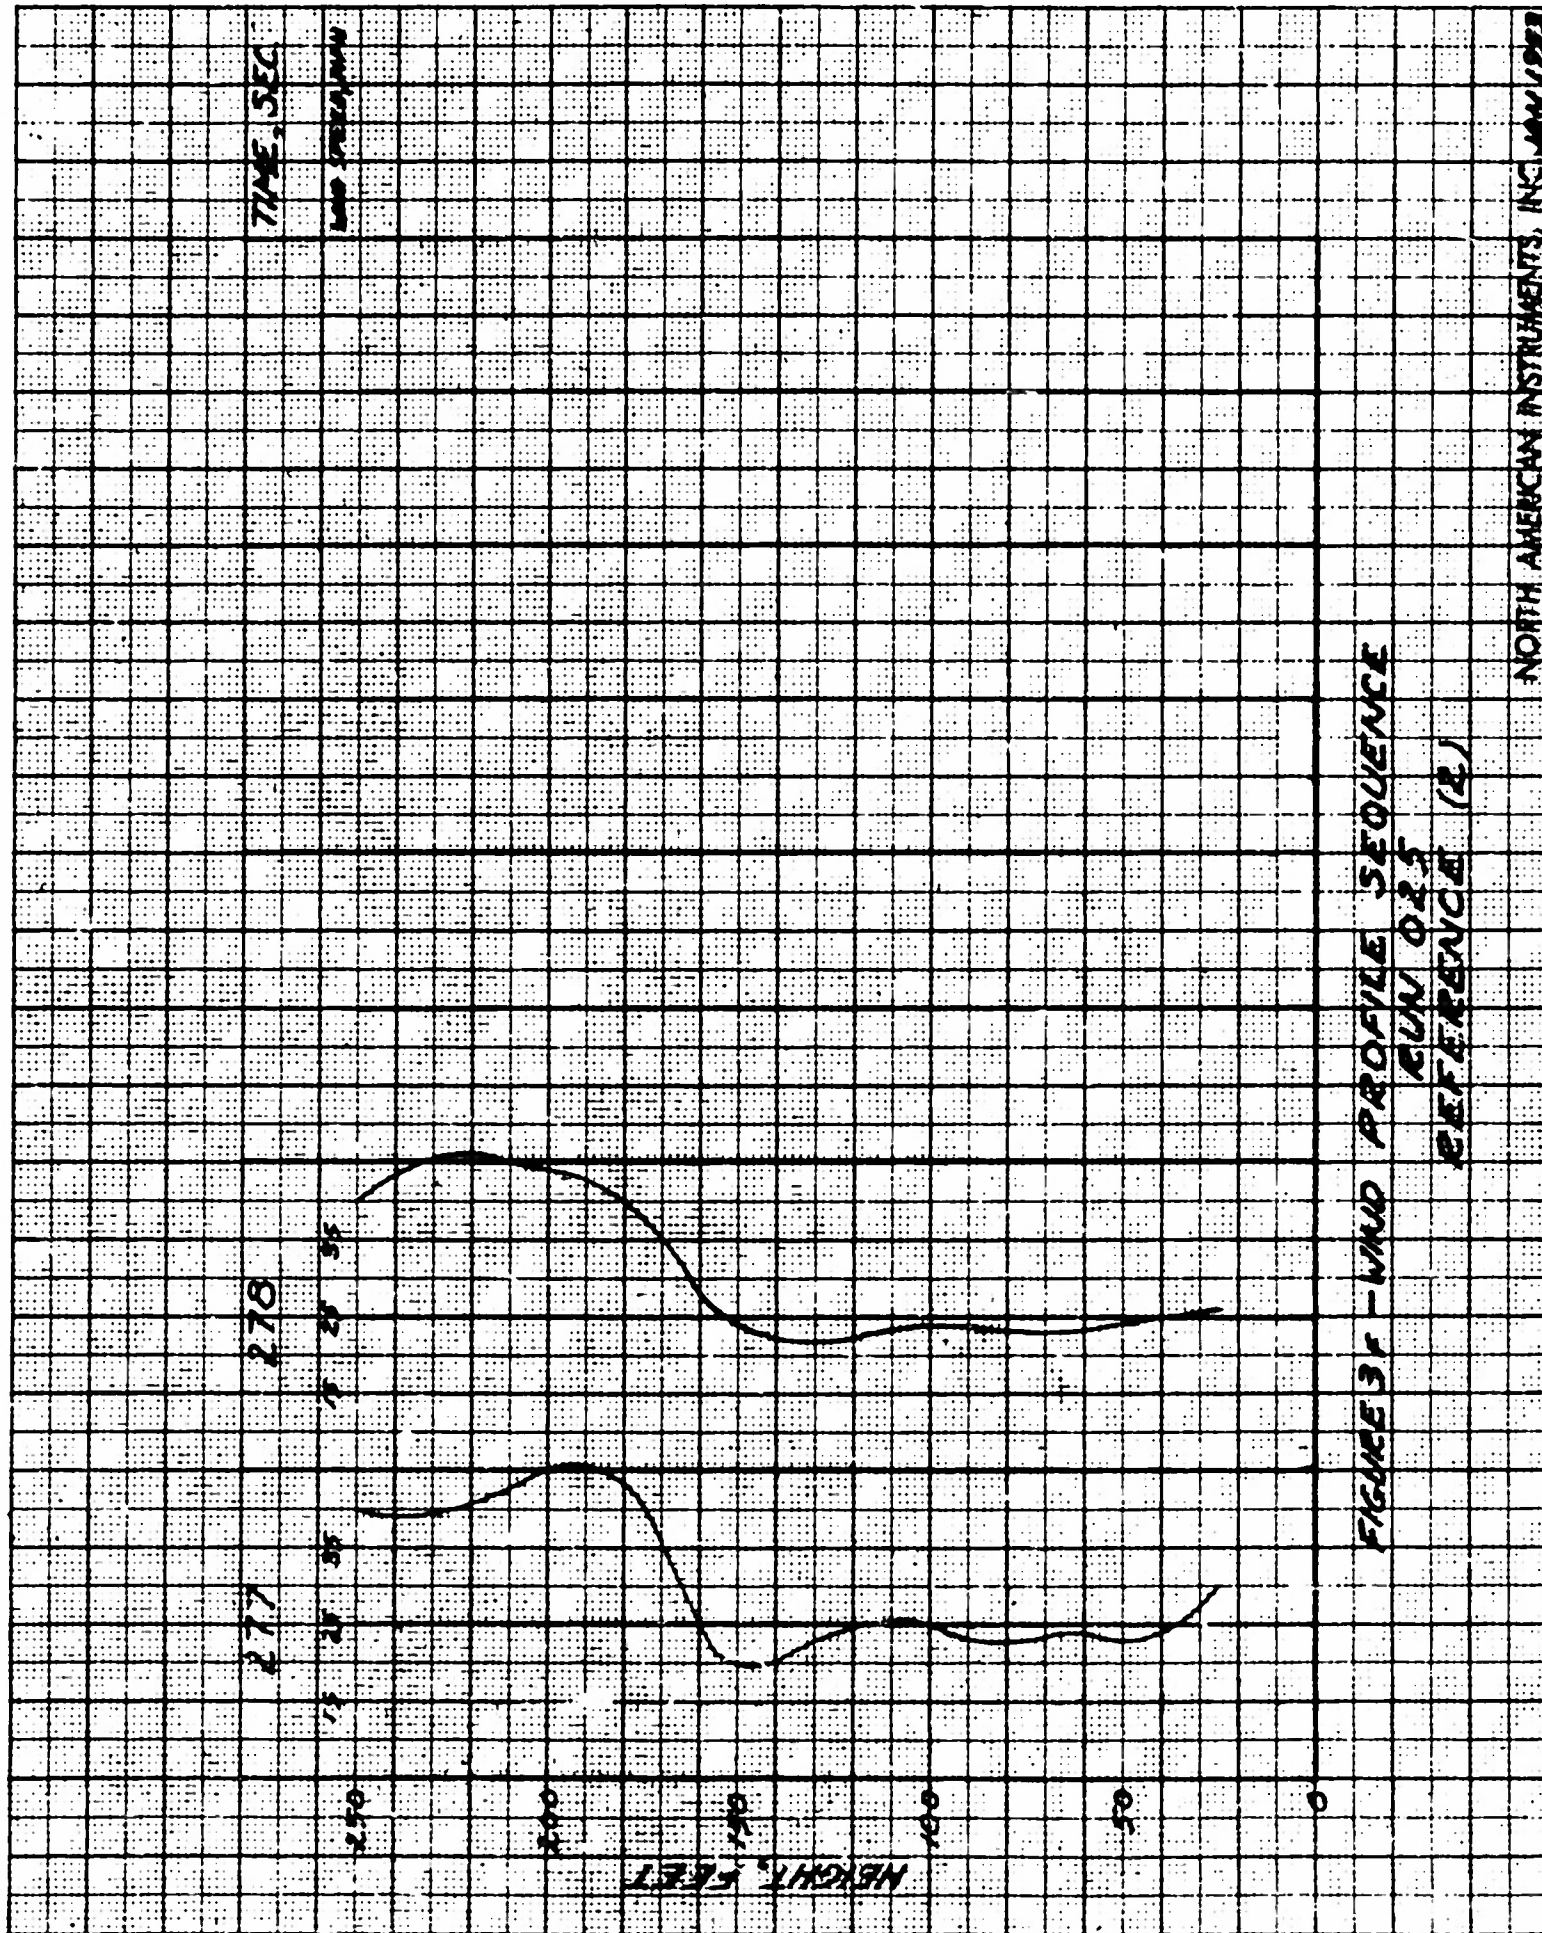

**FIGURE 31 - WIND PROFILE SEQUENCE  
GUN 025  
REFERENCE (R)**



# CONFIDENTIAL SECURITY INFORMATION

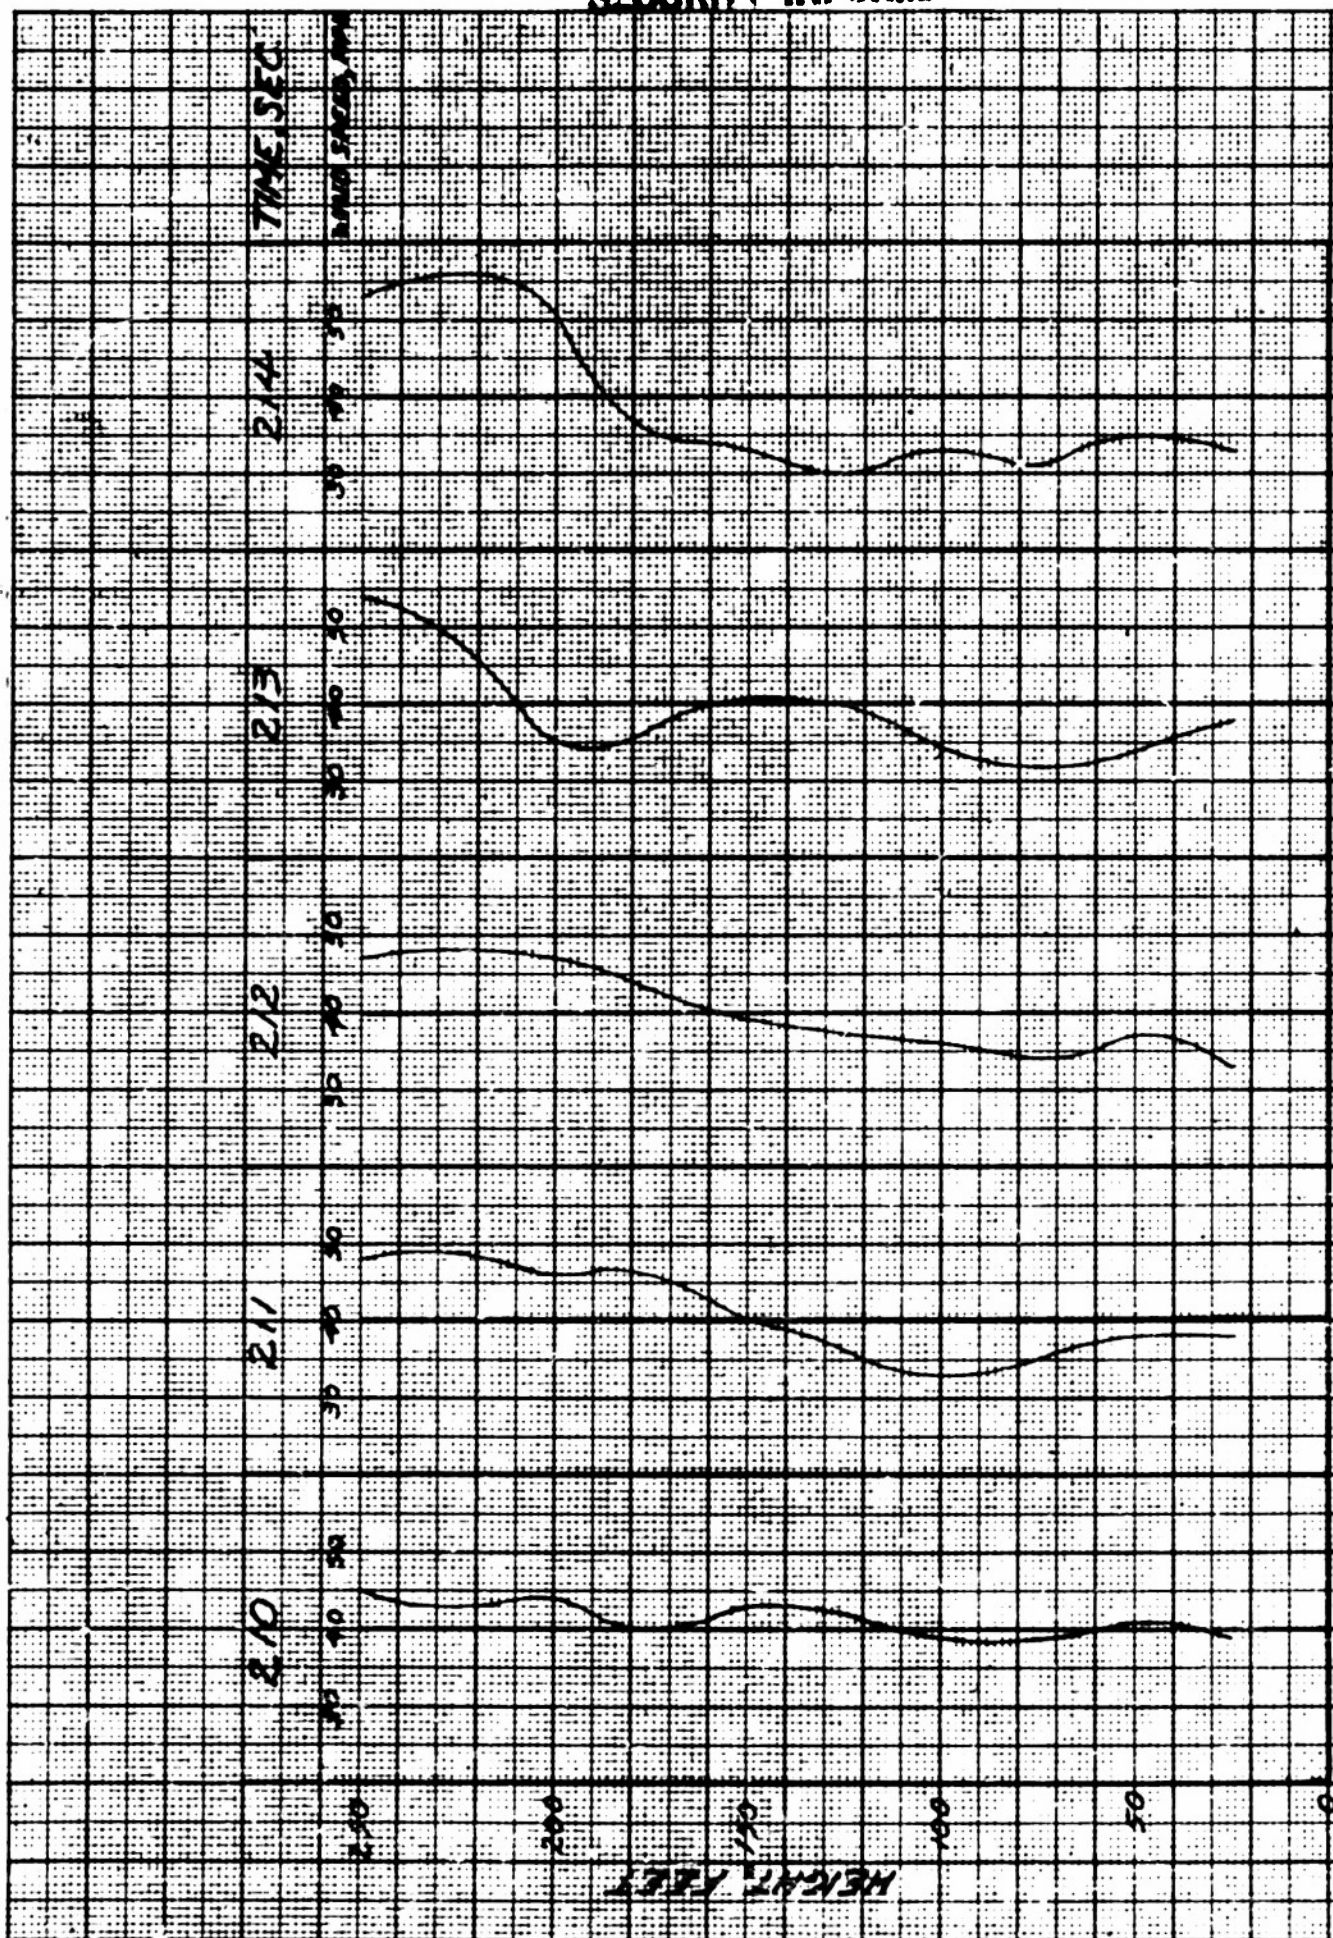


FIGURE 4A - WIND PROFILE SEQUENCE  
RUN 9.2.6  
REFERENCE (2)

CONFIDENTIAL  
SECURITY INFORMATION

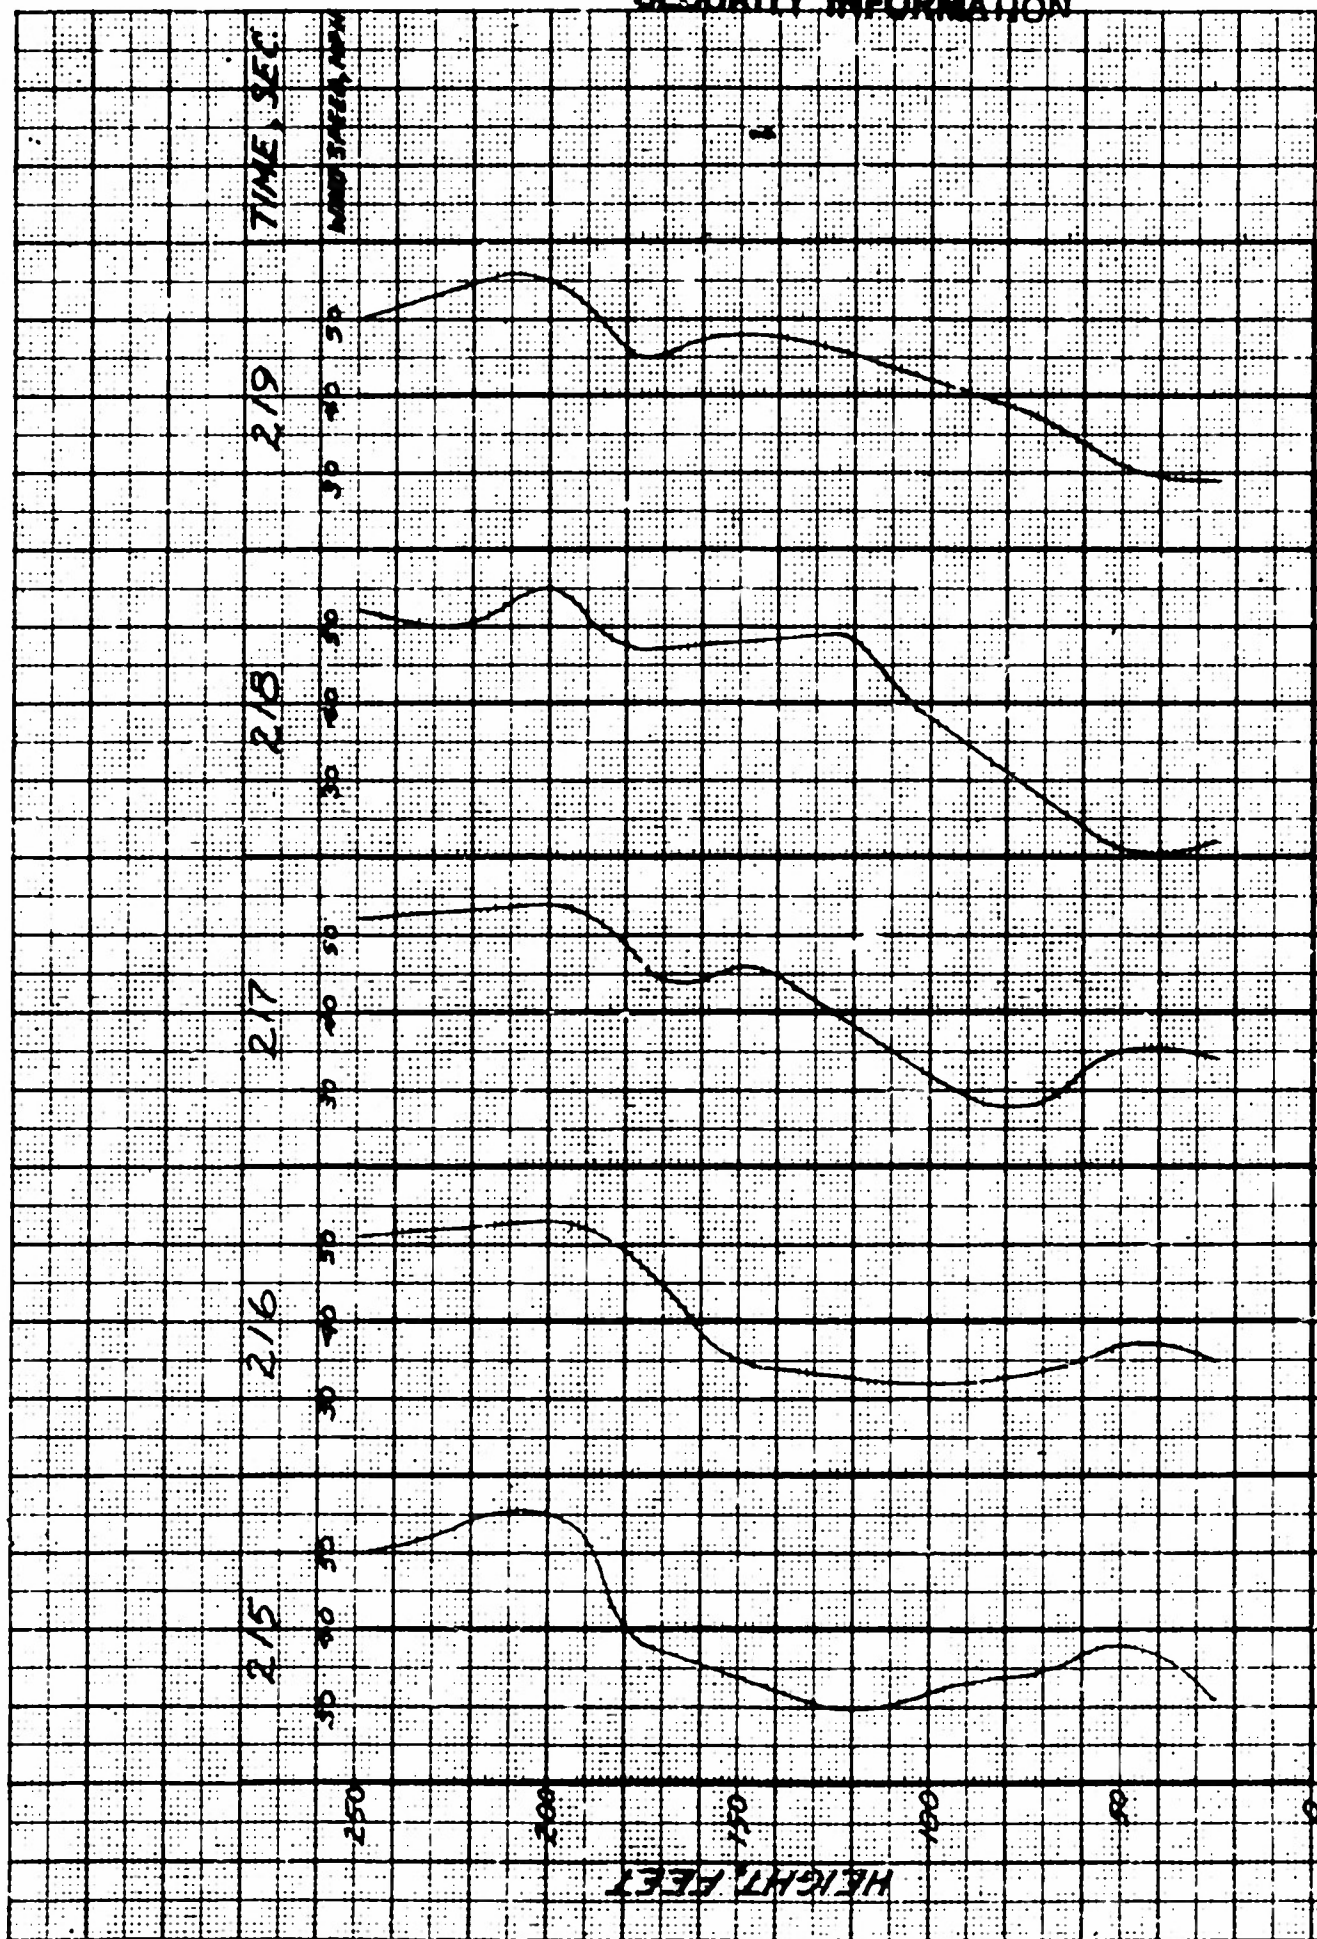


FIGURE 48 - WIND PROFILE SEQUENCE  
RUN 026  
REFERENCE (2)



# CONFIDENTIAL SECURITY INFORMATION

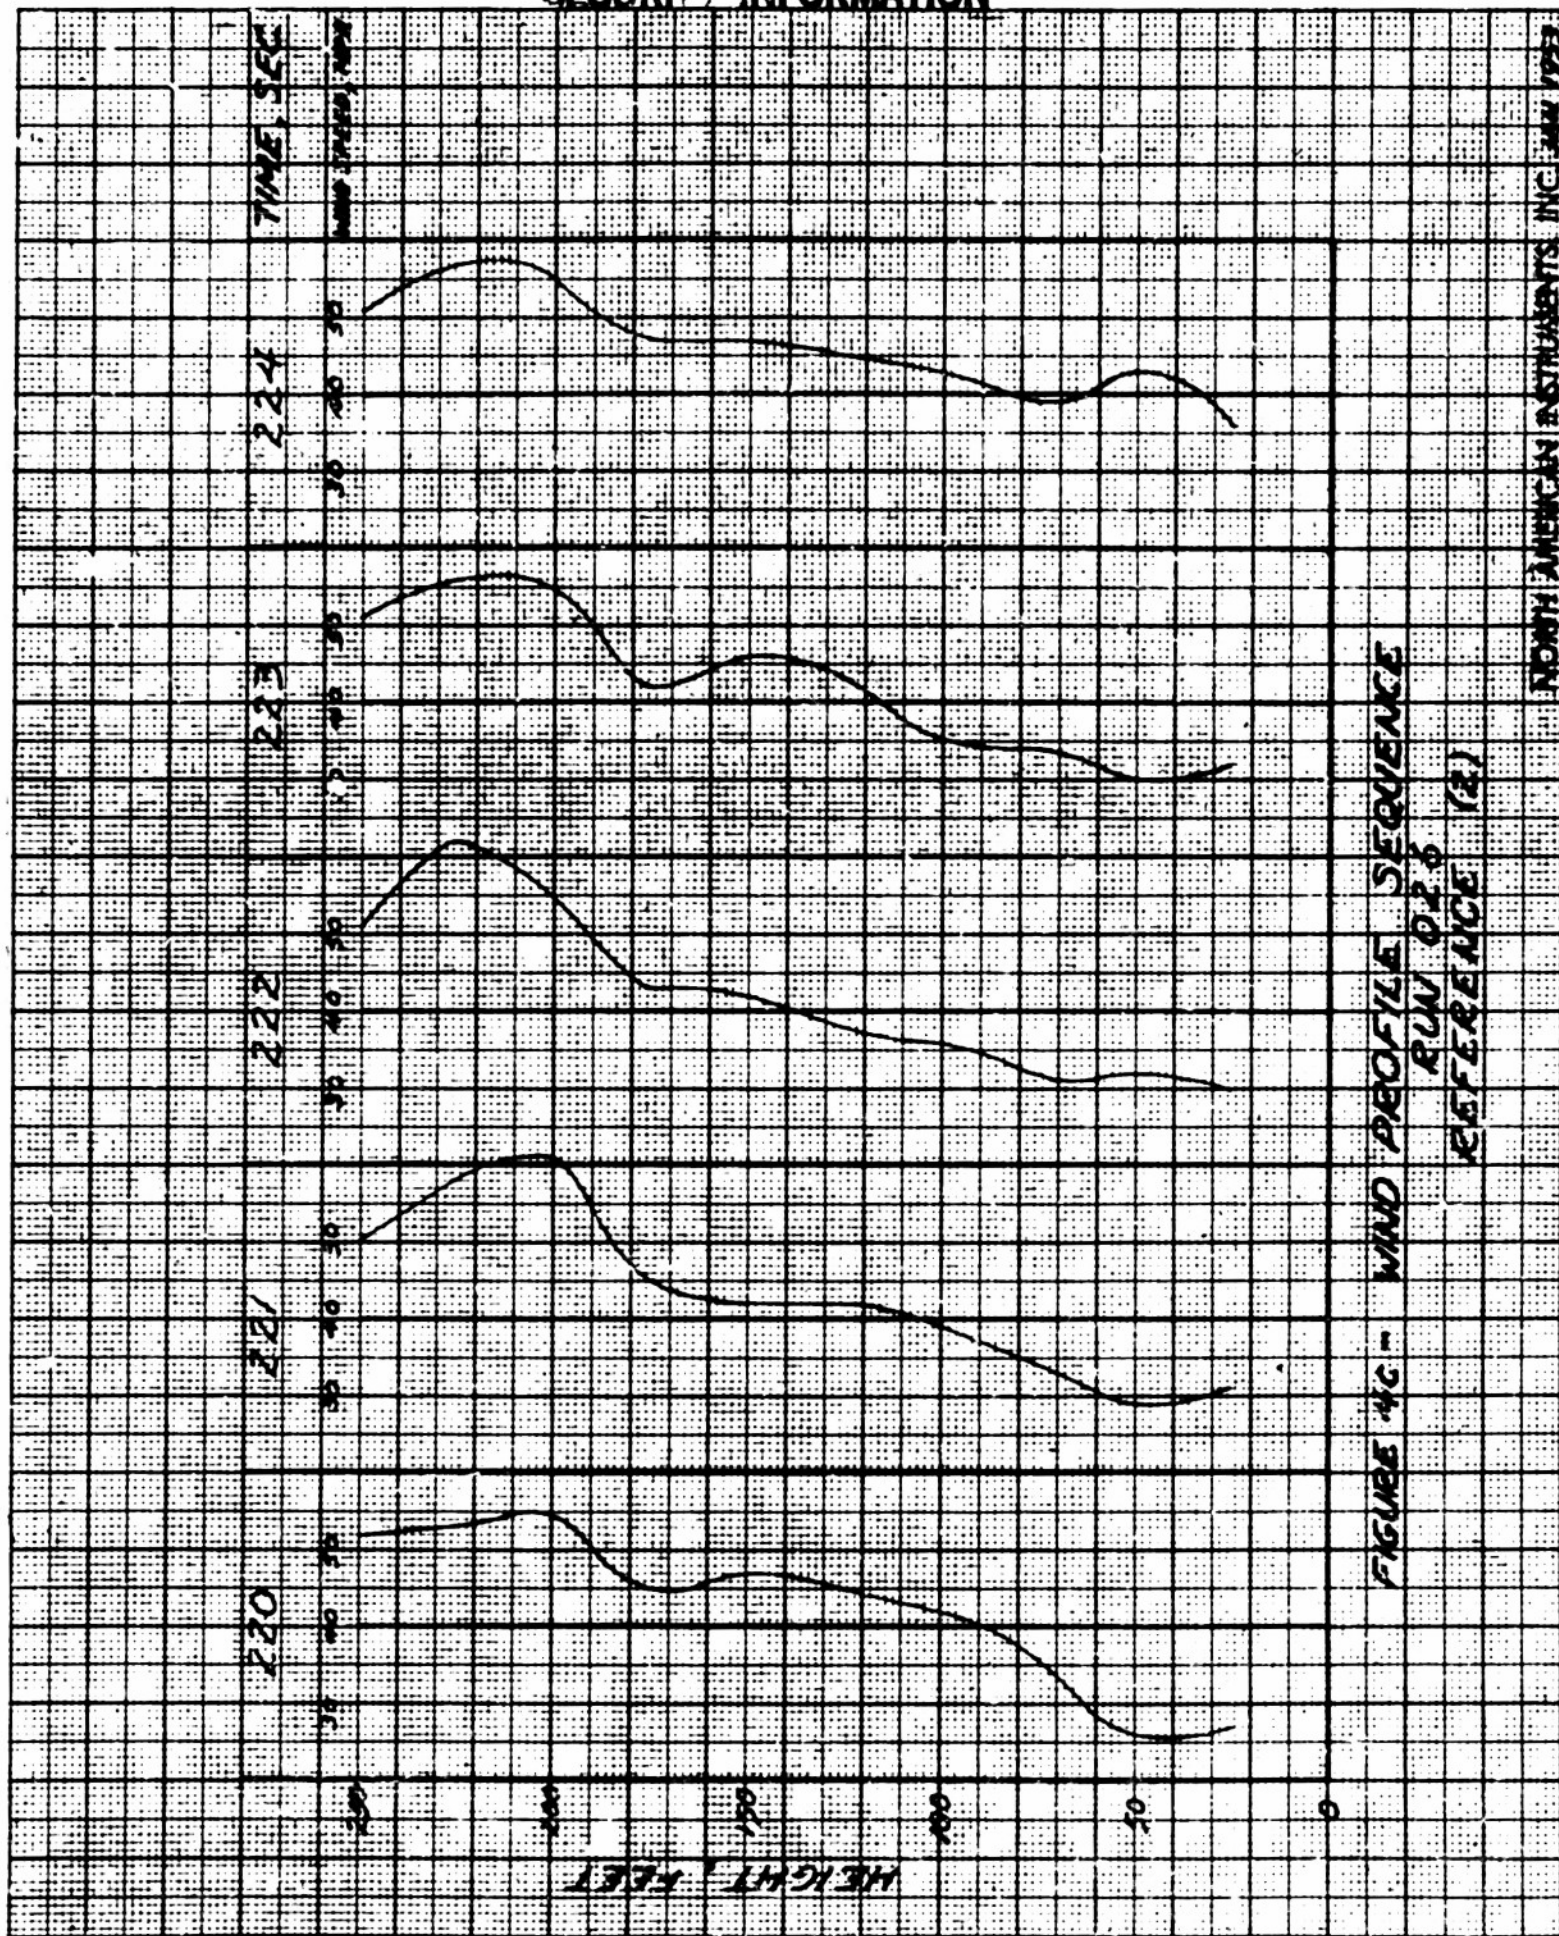


FIGURE 4C - WIND PROFILE SEQUENCE  
RUN 02.8  
REFERENCE (2)



CONFIDENTIAL  
SECURITY INFORMATION

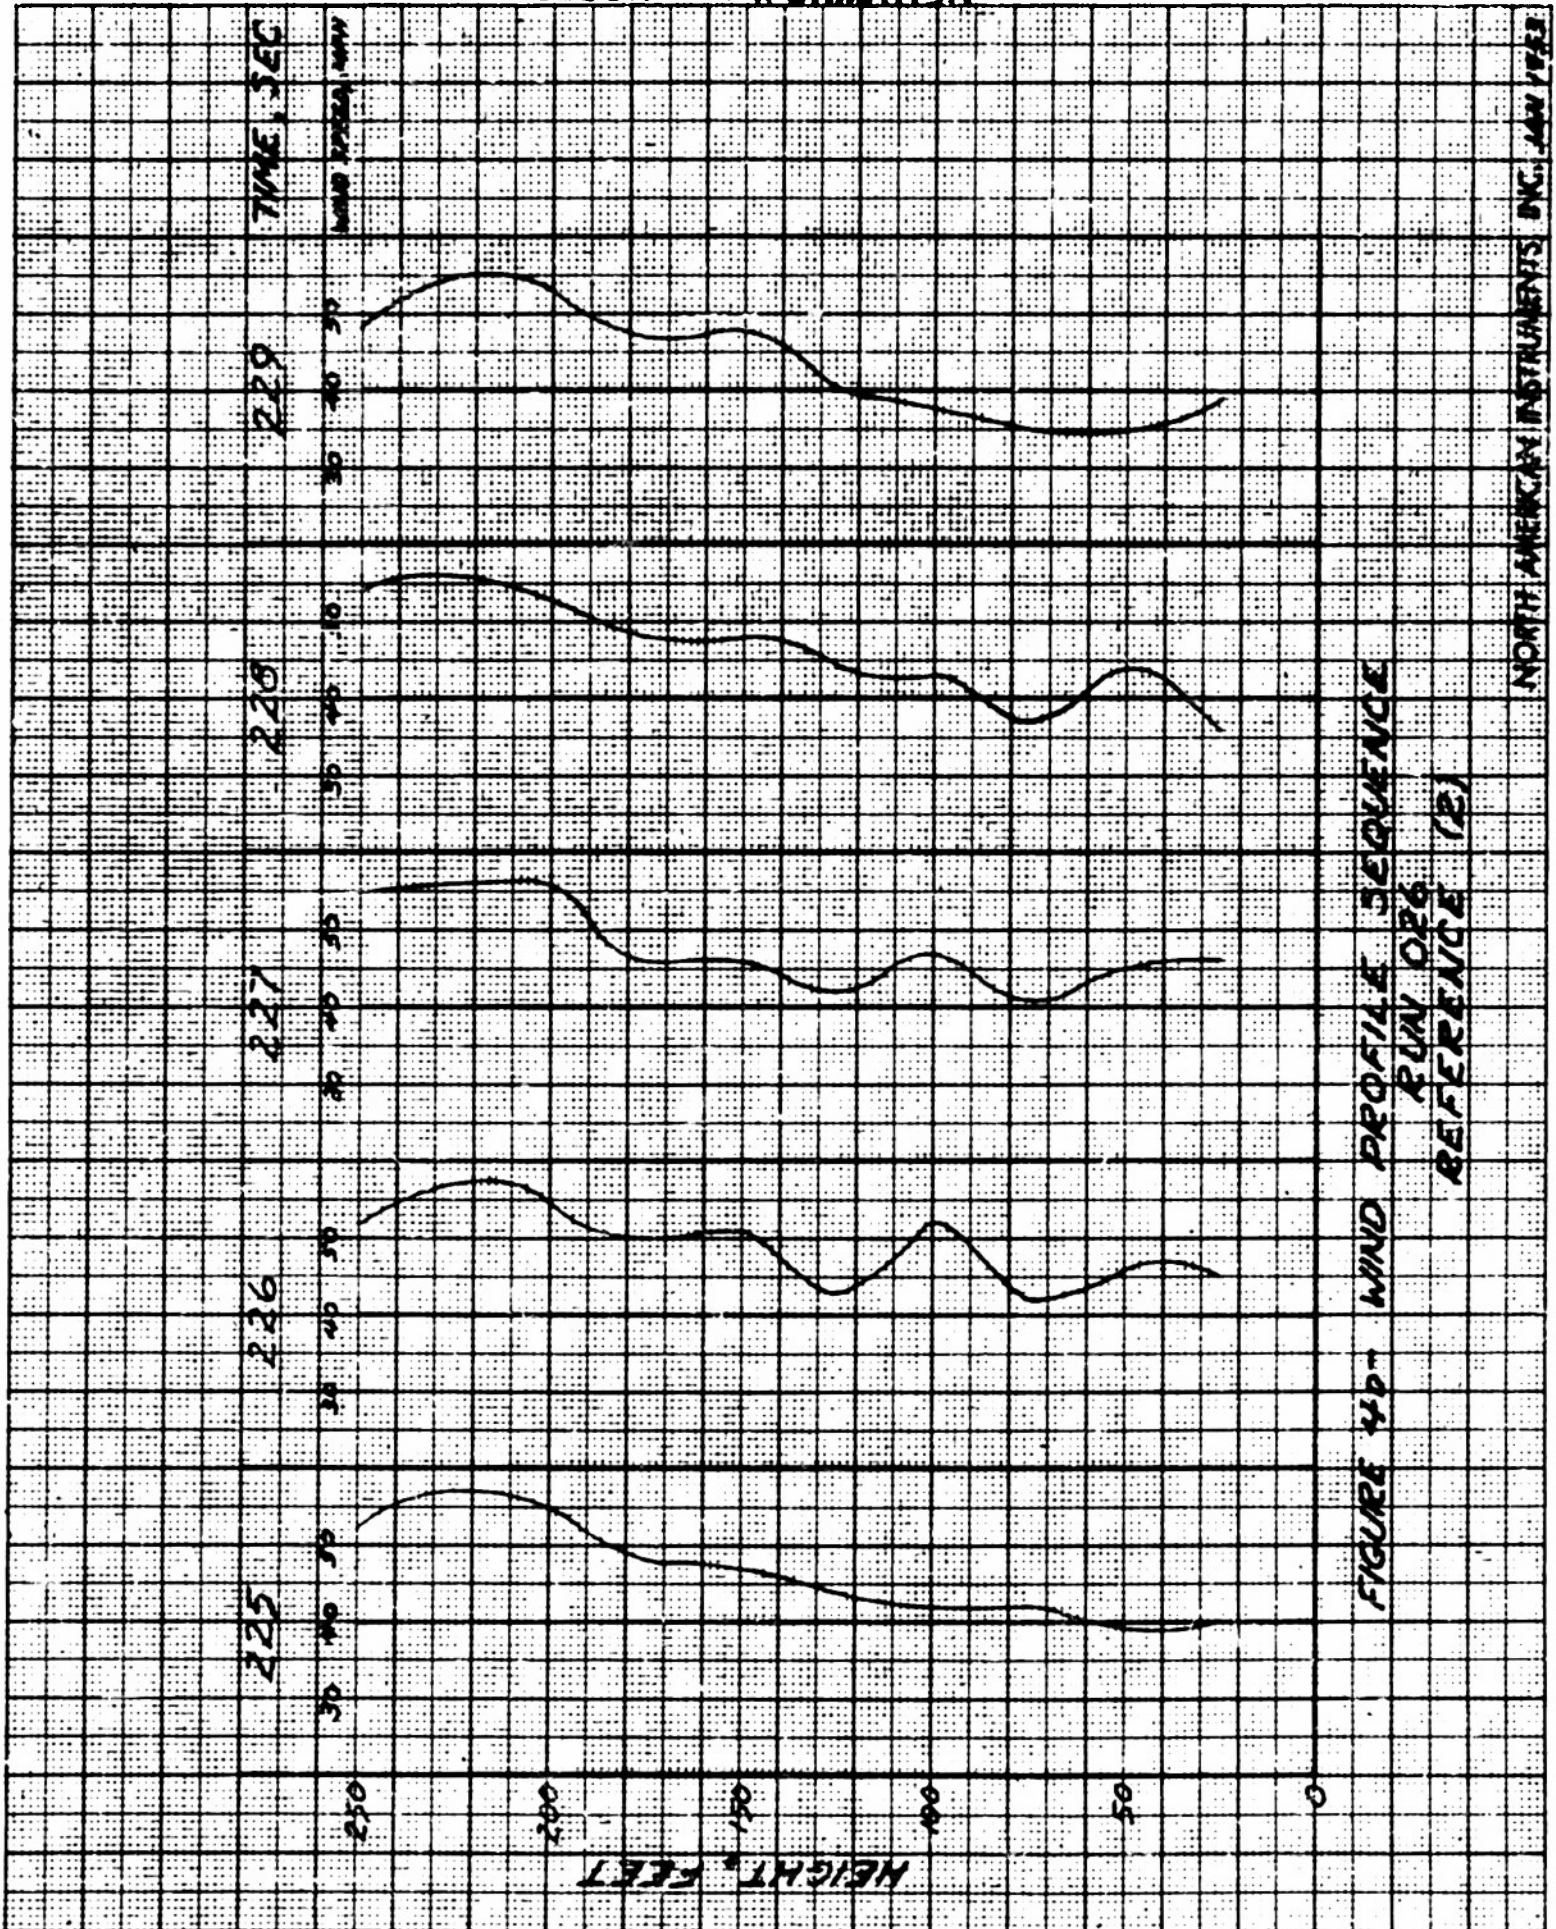


FIGURE 4D- WIND PROFILE SEQUENCE  
RUN 026  
REFERENCE (2)



161  
545500

CONFIDENTIAL  
SECURITY INFORMATION

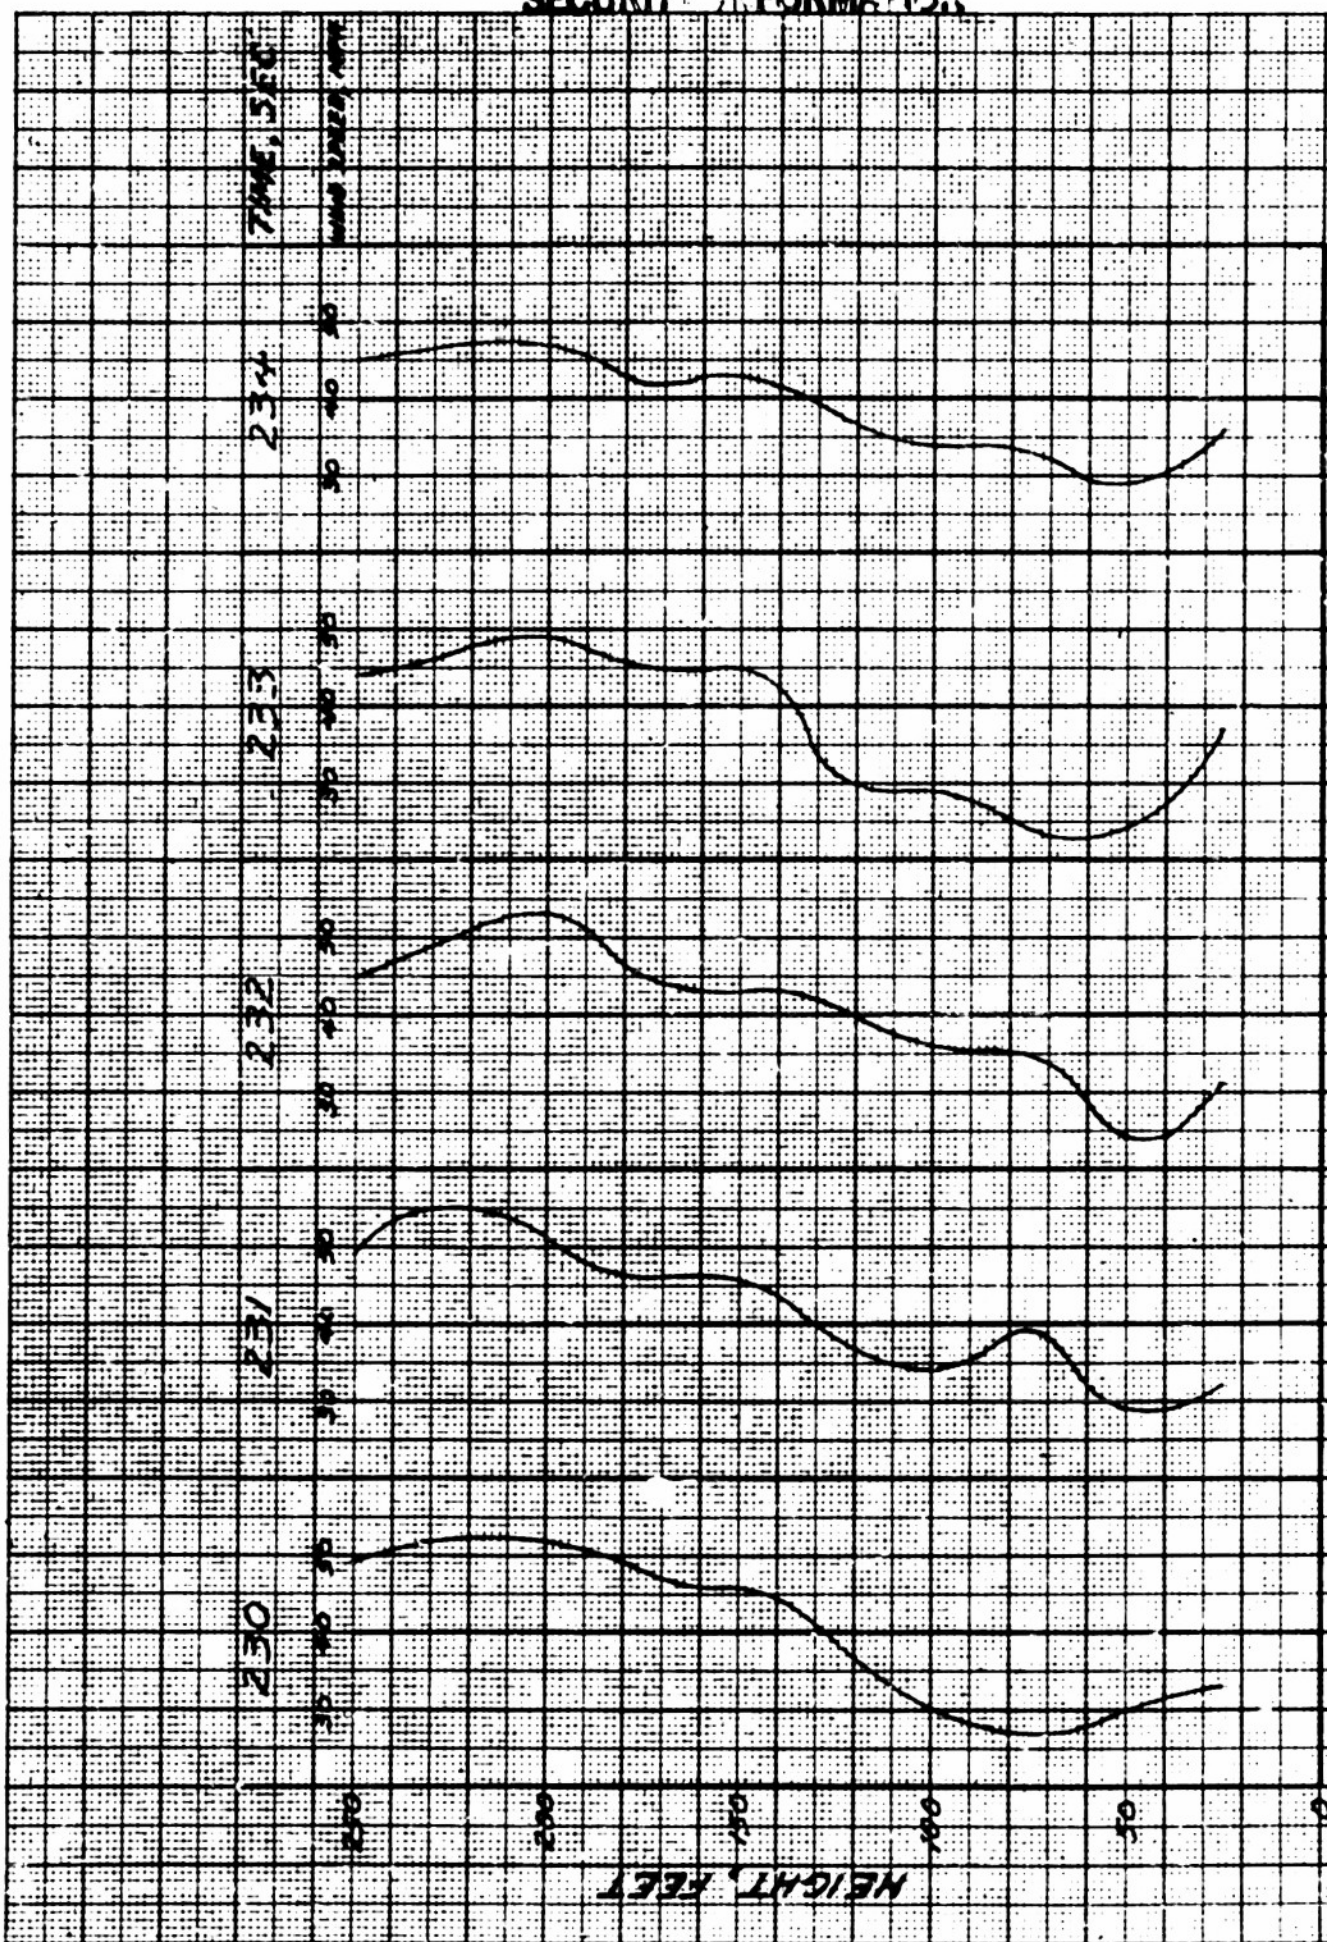


FIGURE 4E- WIND PROFILE SEQUENCE  
RUN 026  
REFERENCE (2)

SECURITY INFORMATION



# CONFIDENTIAL SECURITY INFORMATION

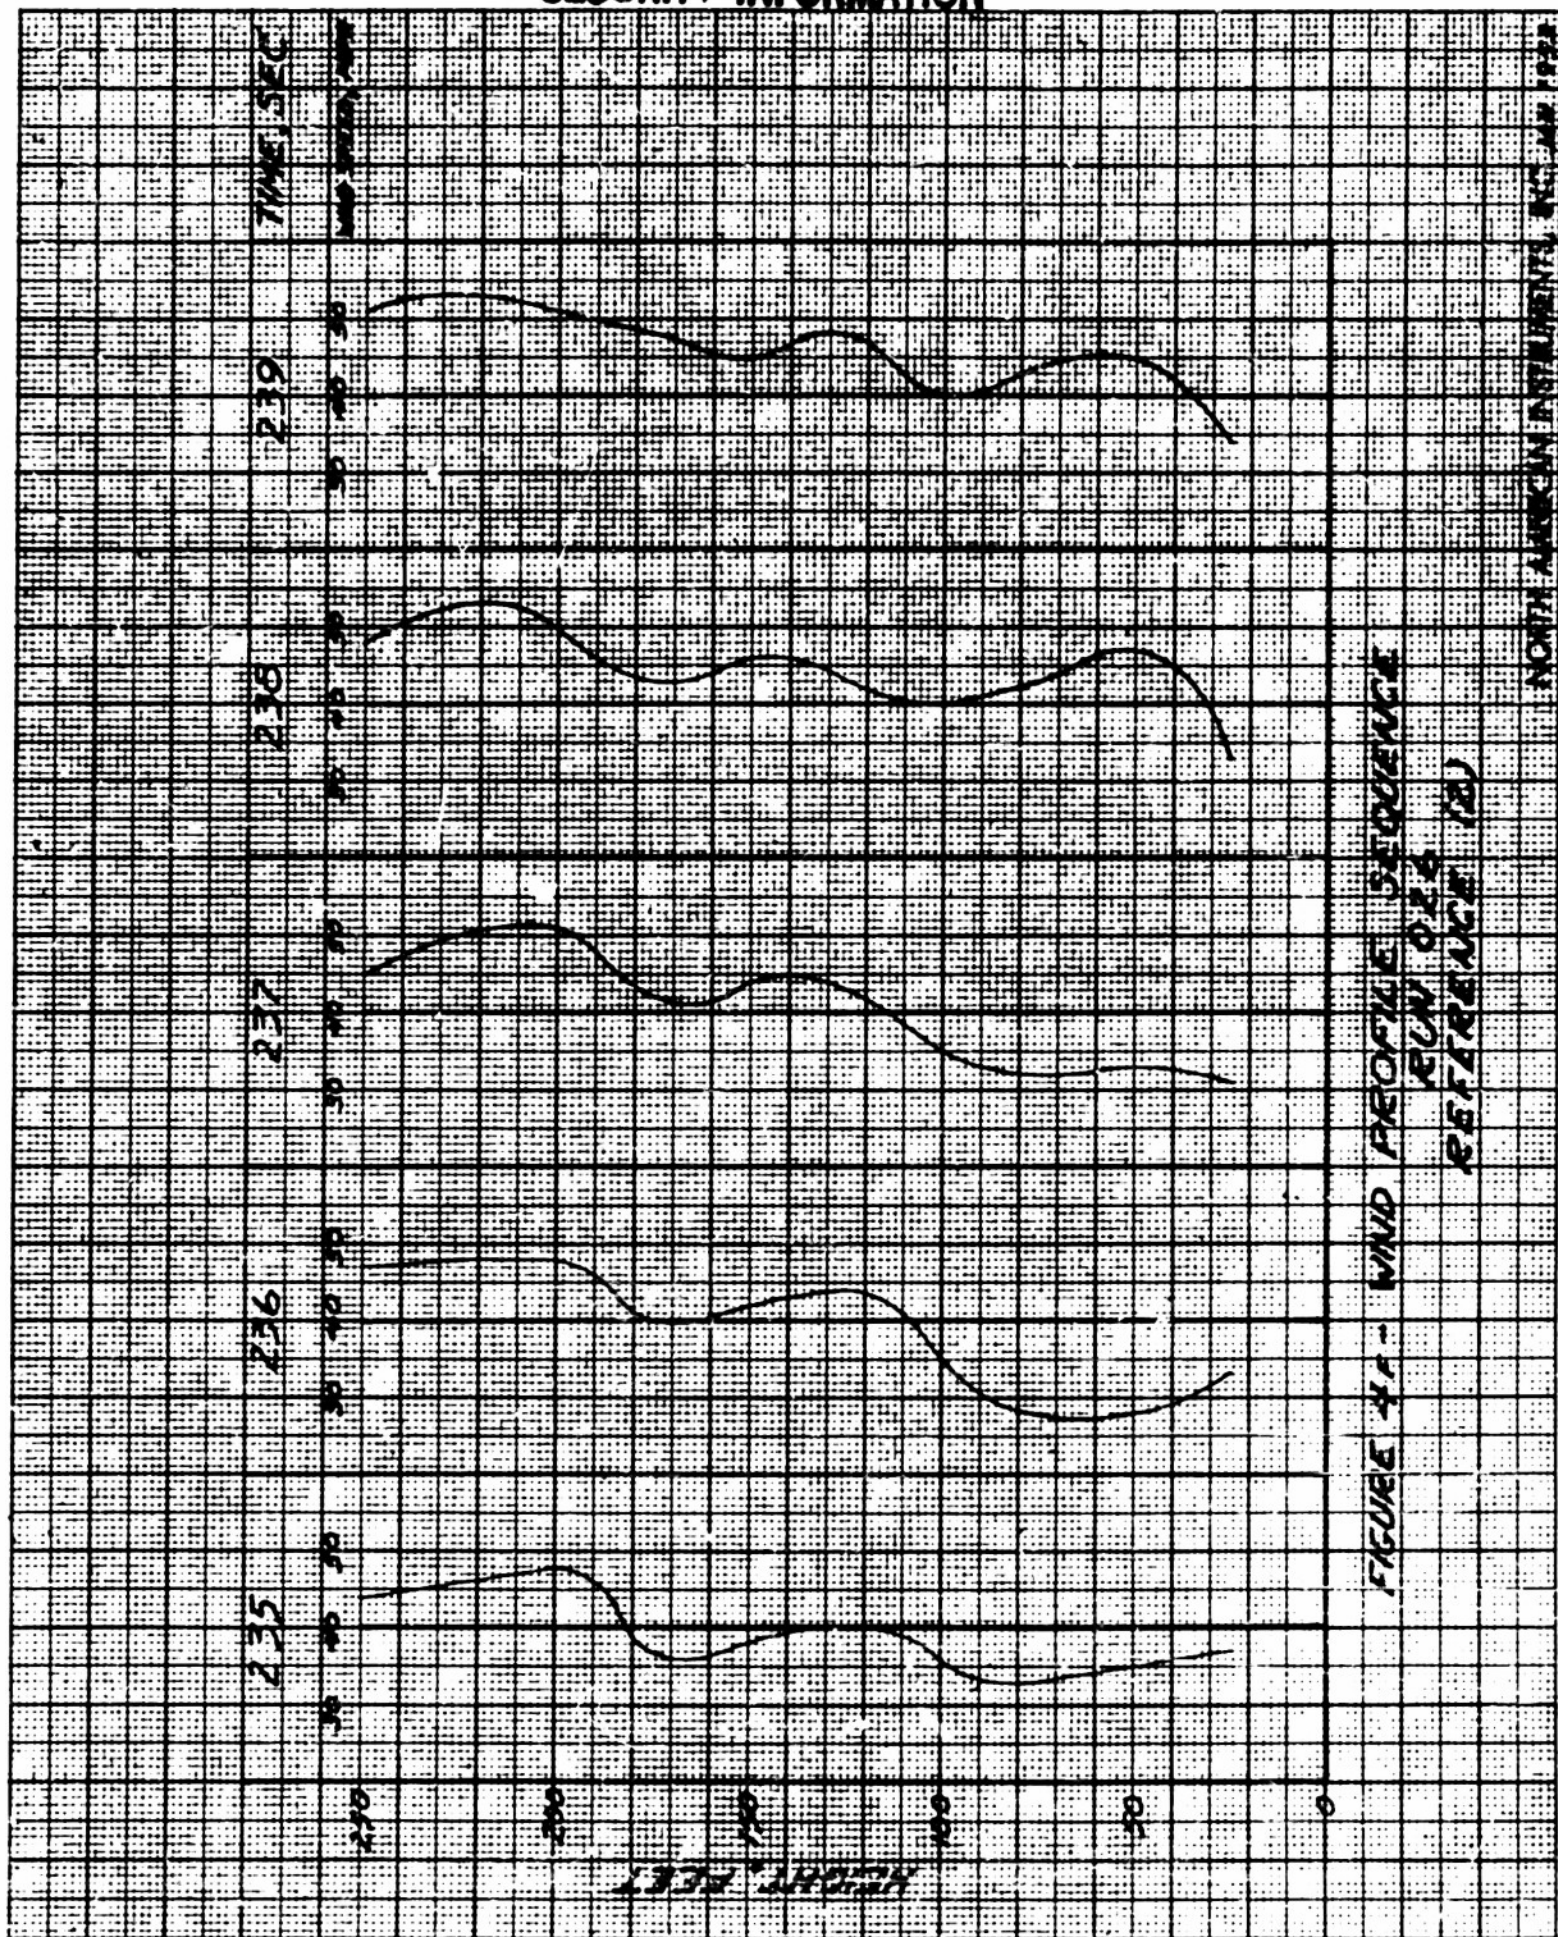


FIGURE 41 - WIND PROFILE SEQUENCE  
RUN 026  
REFERENCE (2)

NORTH AMERICAN INSTRUMENTS, INC. MAY 1972

CONFIDENTIAL

161  
545600



CONFIDENTIAL  
SECURITY INFORMATION

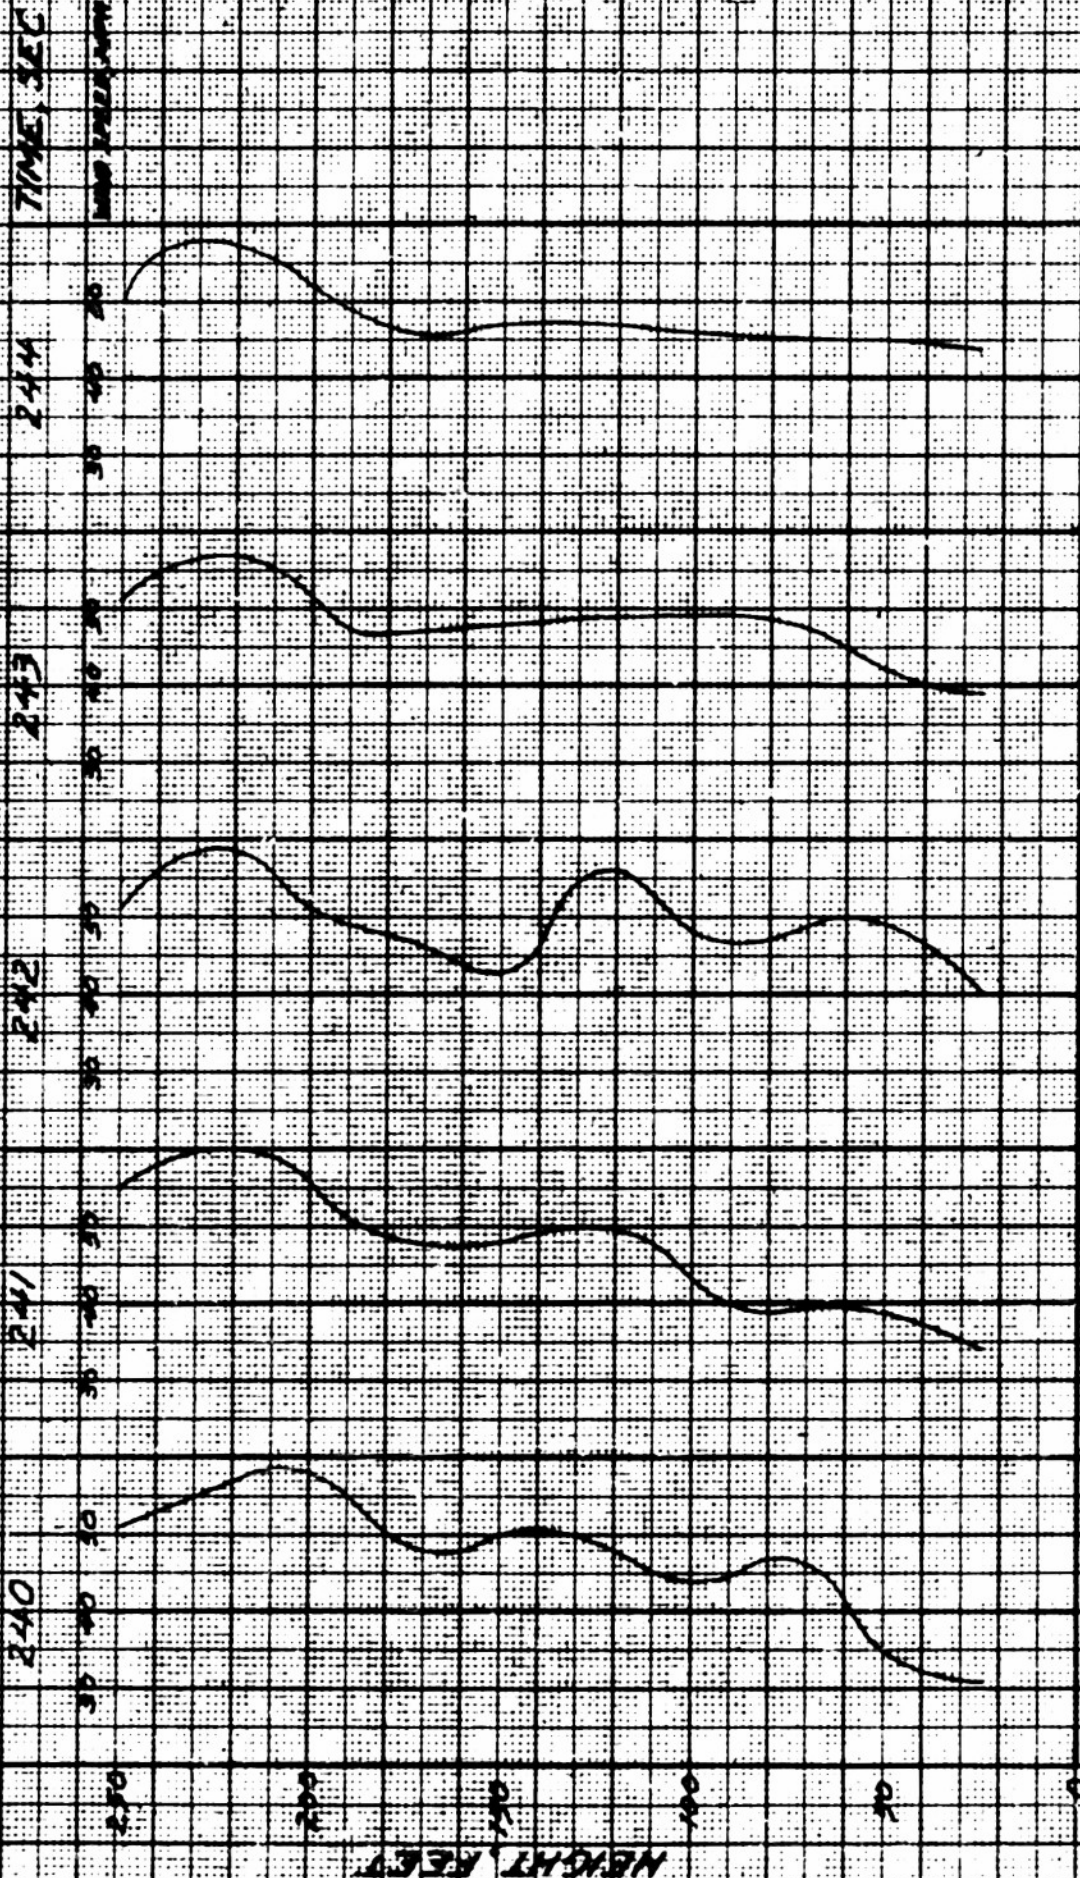


FIGURE 46- WIND PROFILE SEQUENCES  
RUN 026  
REFERENCE (2)



8405248  
161

CONFIDENTIAL  
SECURITY INFORMATION

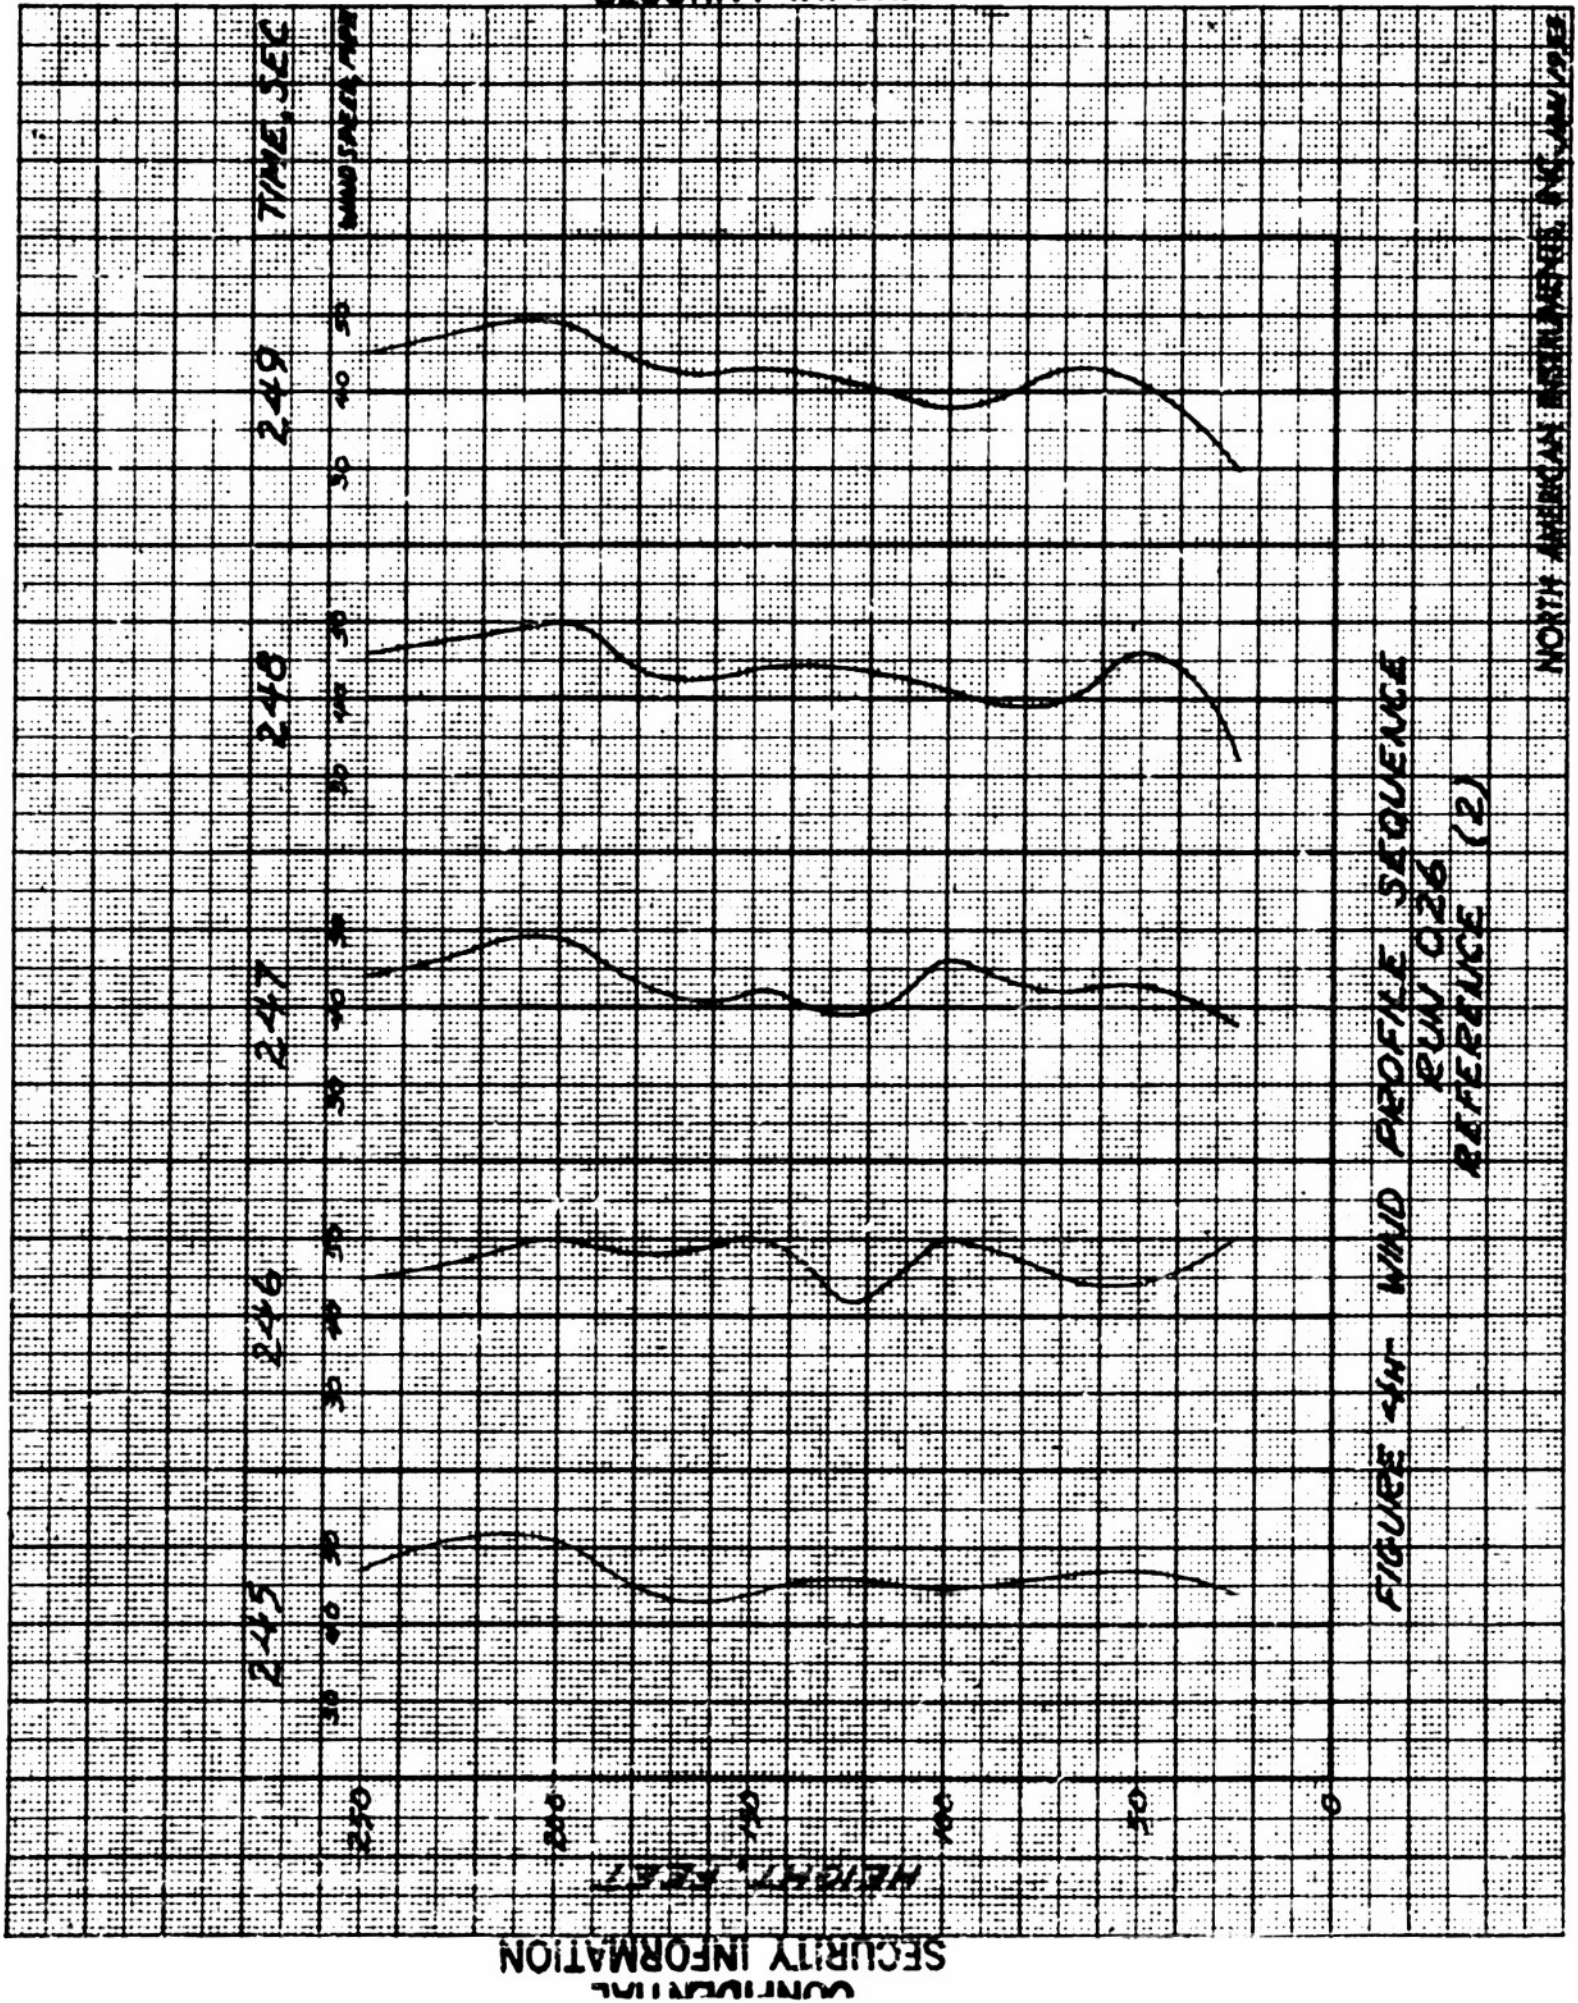


FIGURE 4-4- WIND PROFILE SEQUENCE  
RUN Q26  
REFERENCE (2)

NORTH AMERICAN INSTRUMENTS, INC. JAN 1953

CONFIDENTIAL  
SECURITY INFORMATION



CONFIDENTIAL  
SECURITY INFORMATION

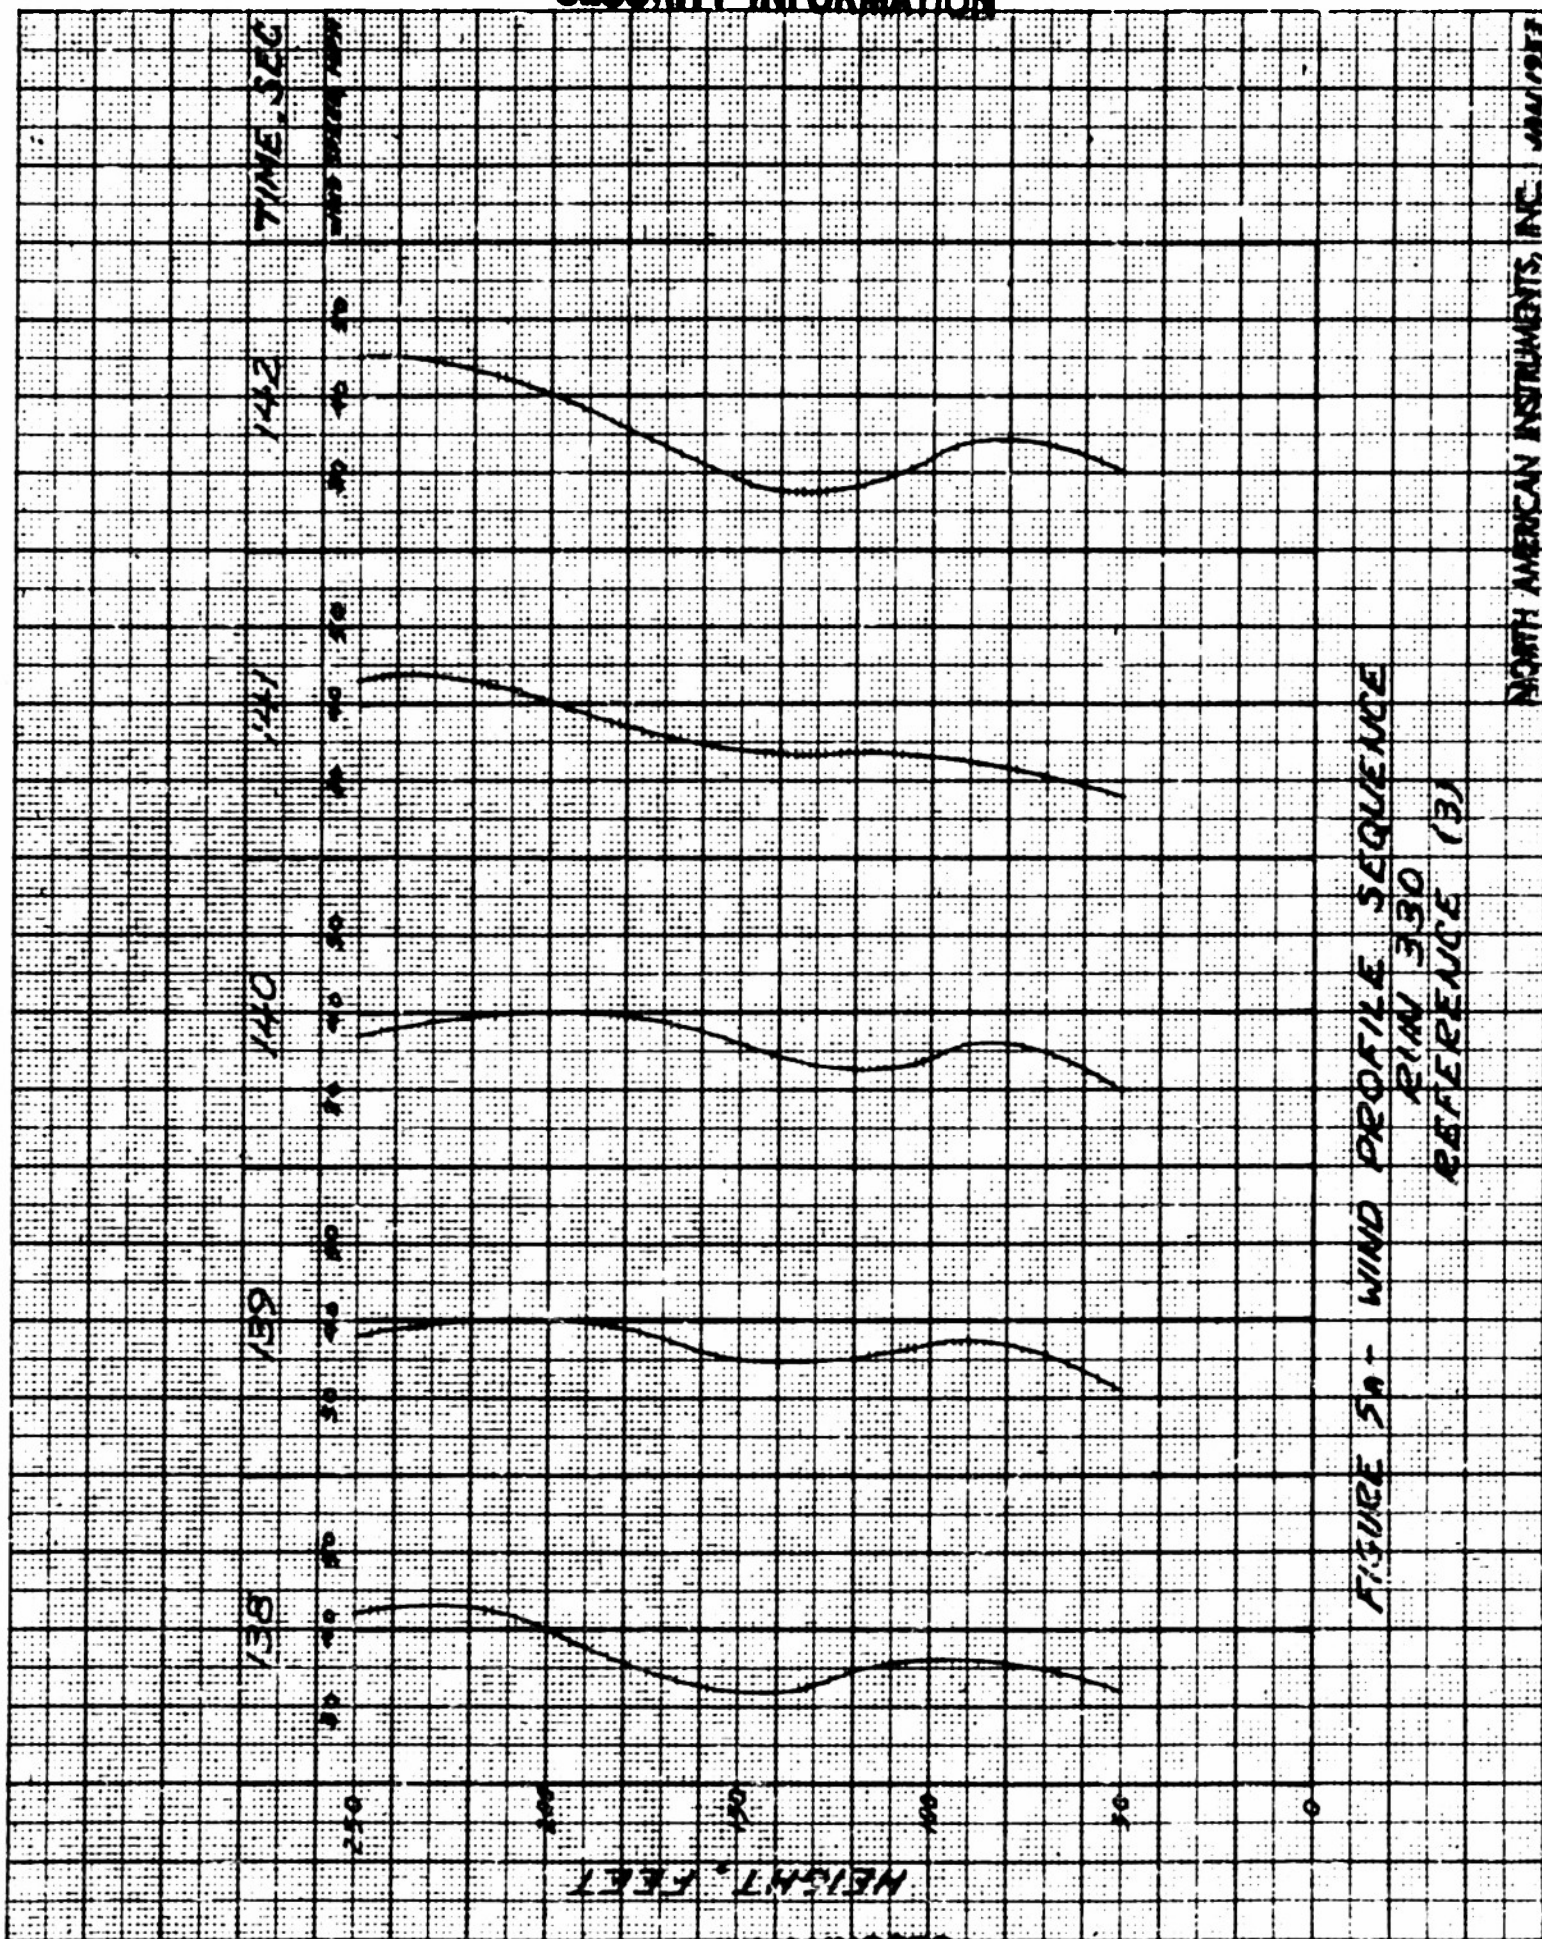


FIGURE 5A - WIND PROFILE SEQUENCE  
RAN 330  
REFERENCE (B)



# CONFIDENTIAL SECURITY INFORMATION

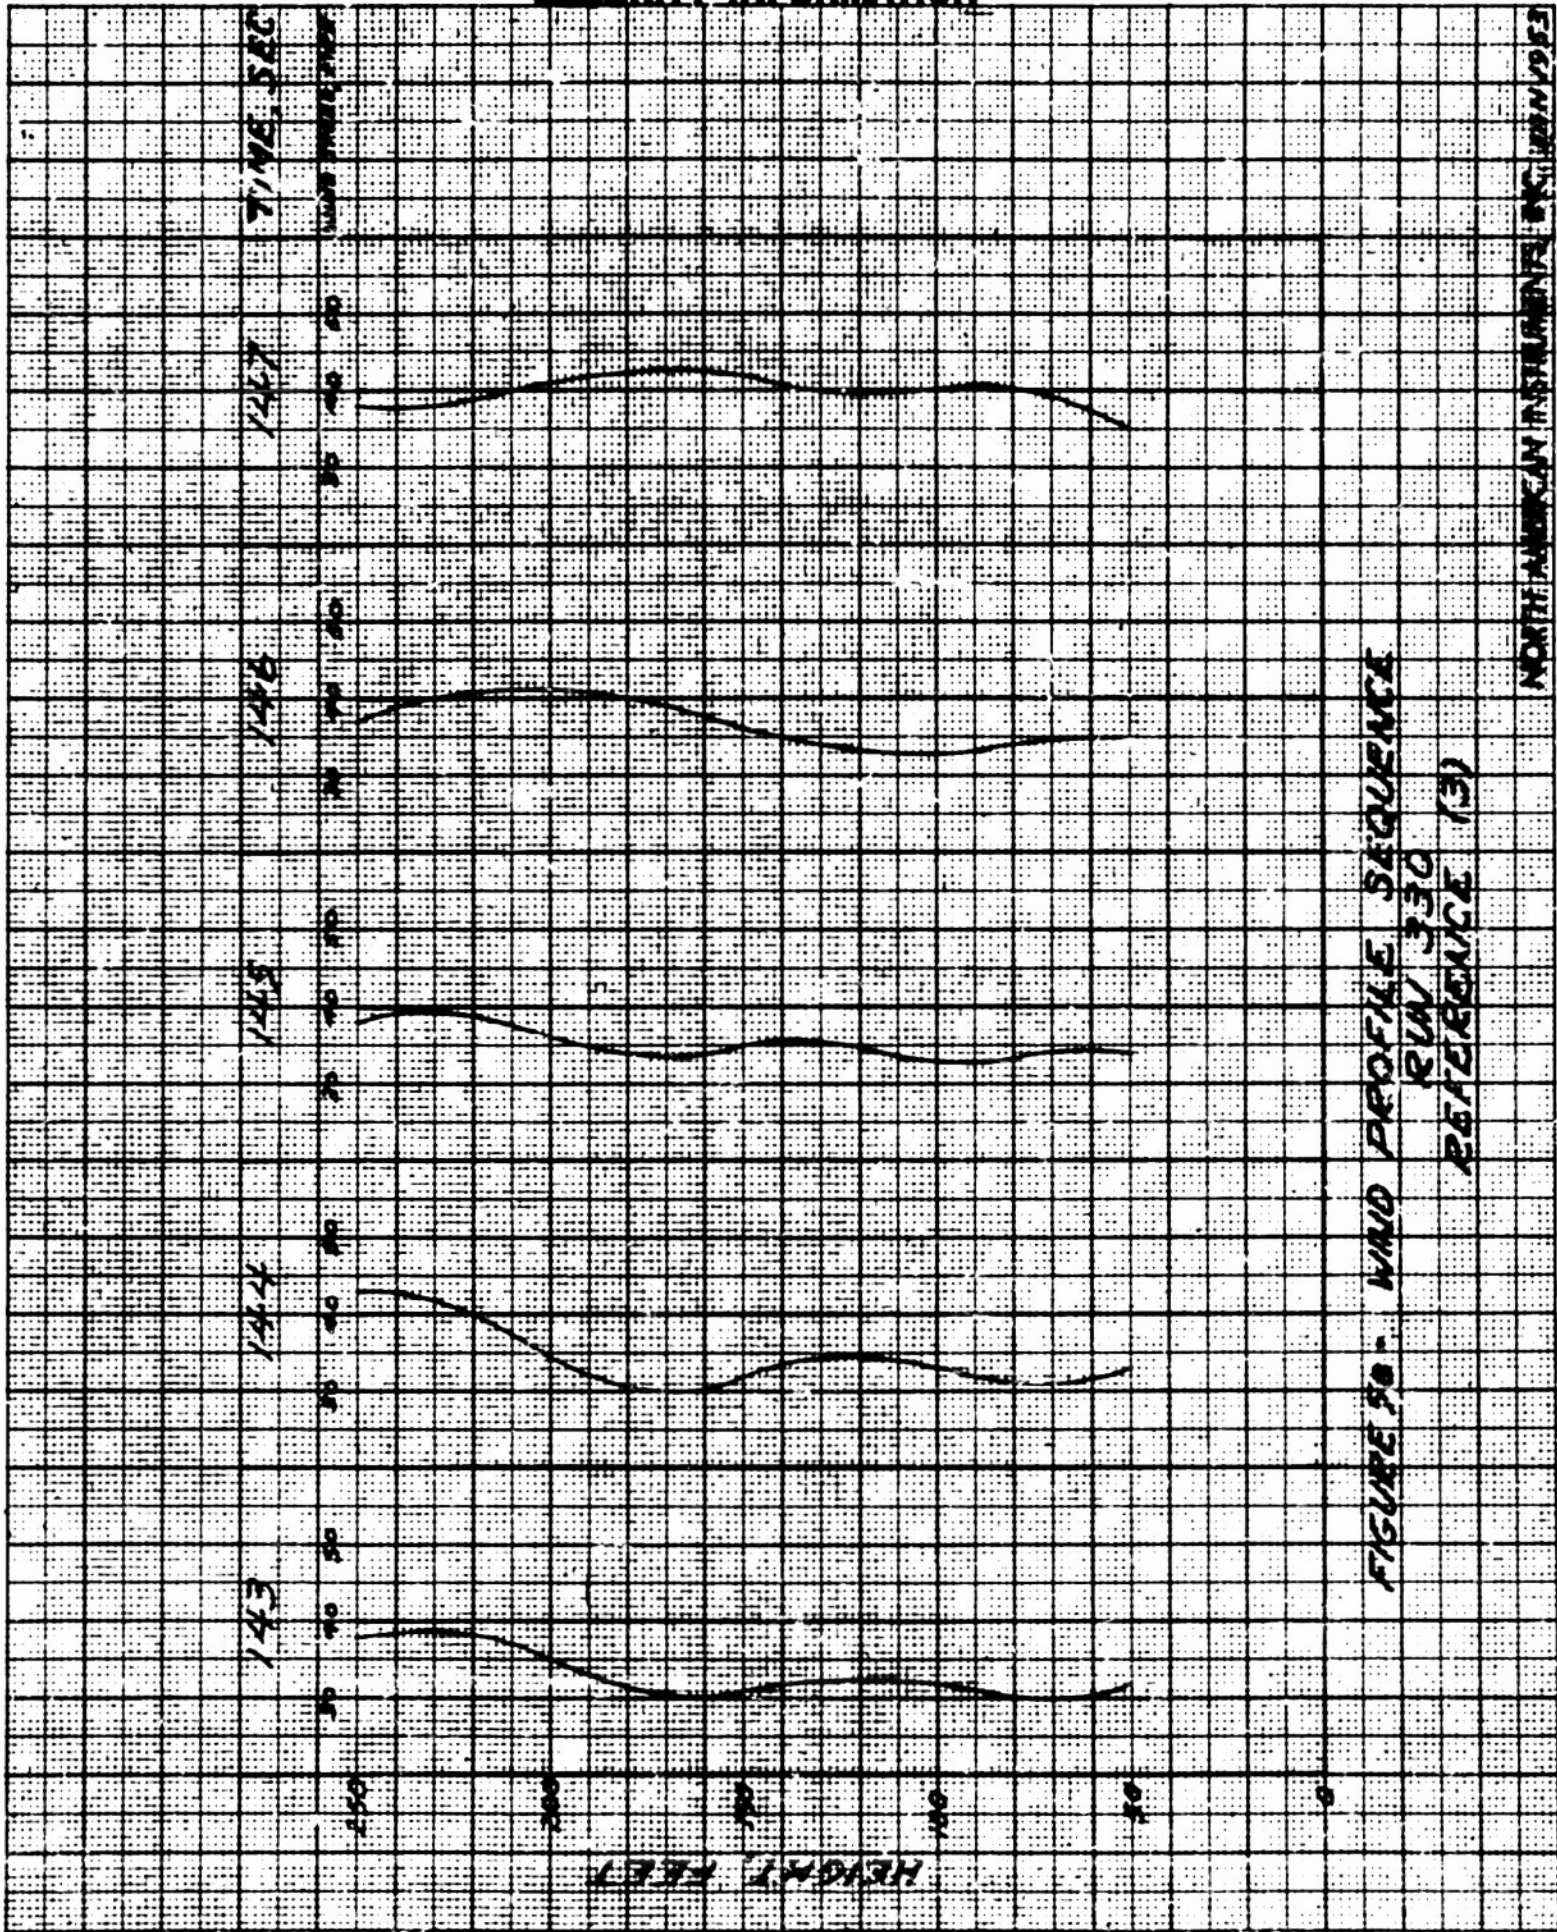


FIGURE 50 - WIND PROFILE SEQUENCE  
RUN 330  
REFERENCE (3)

CONFIDENTIAL  
SECURITY INFORMATION

CONFIDENTIAL  
SECURITY INFORMATION



# CONFIDENTIAL SECURITY INFORMATION

162  
SHE 3 of 10

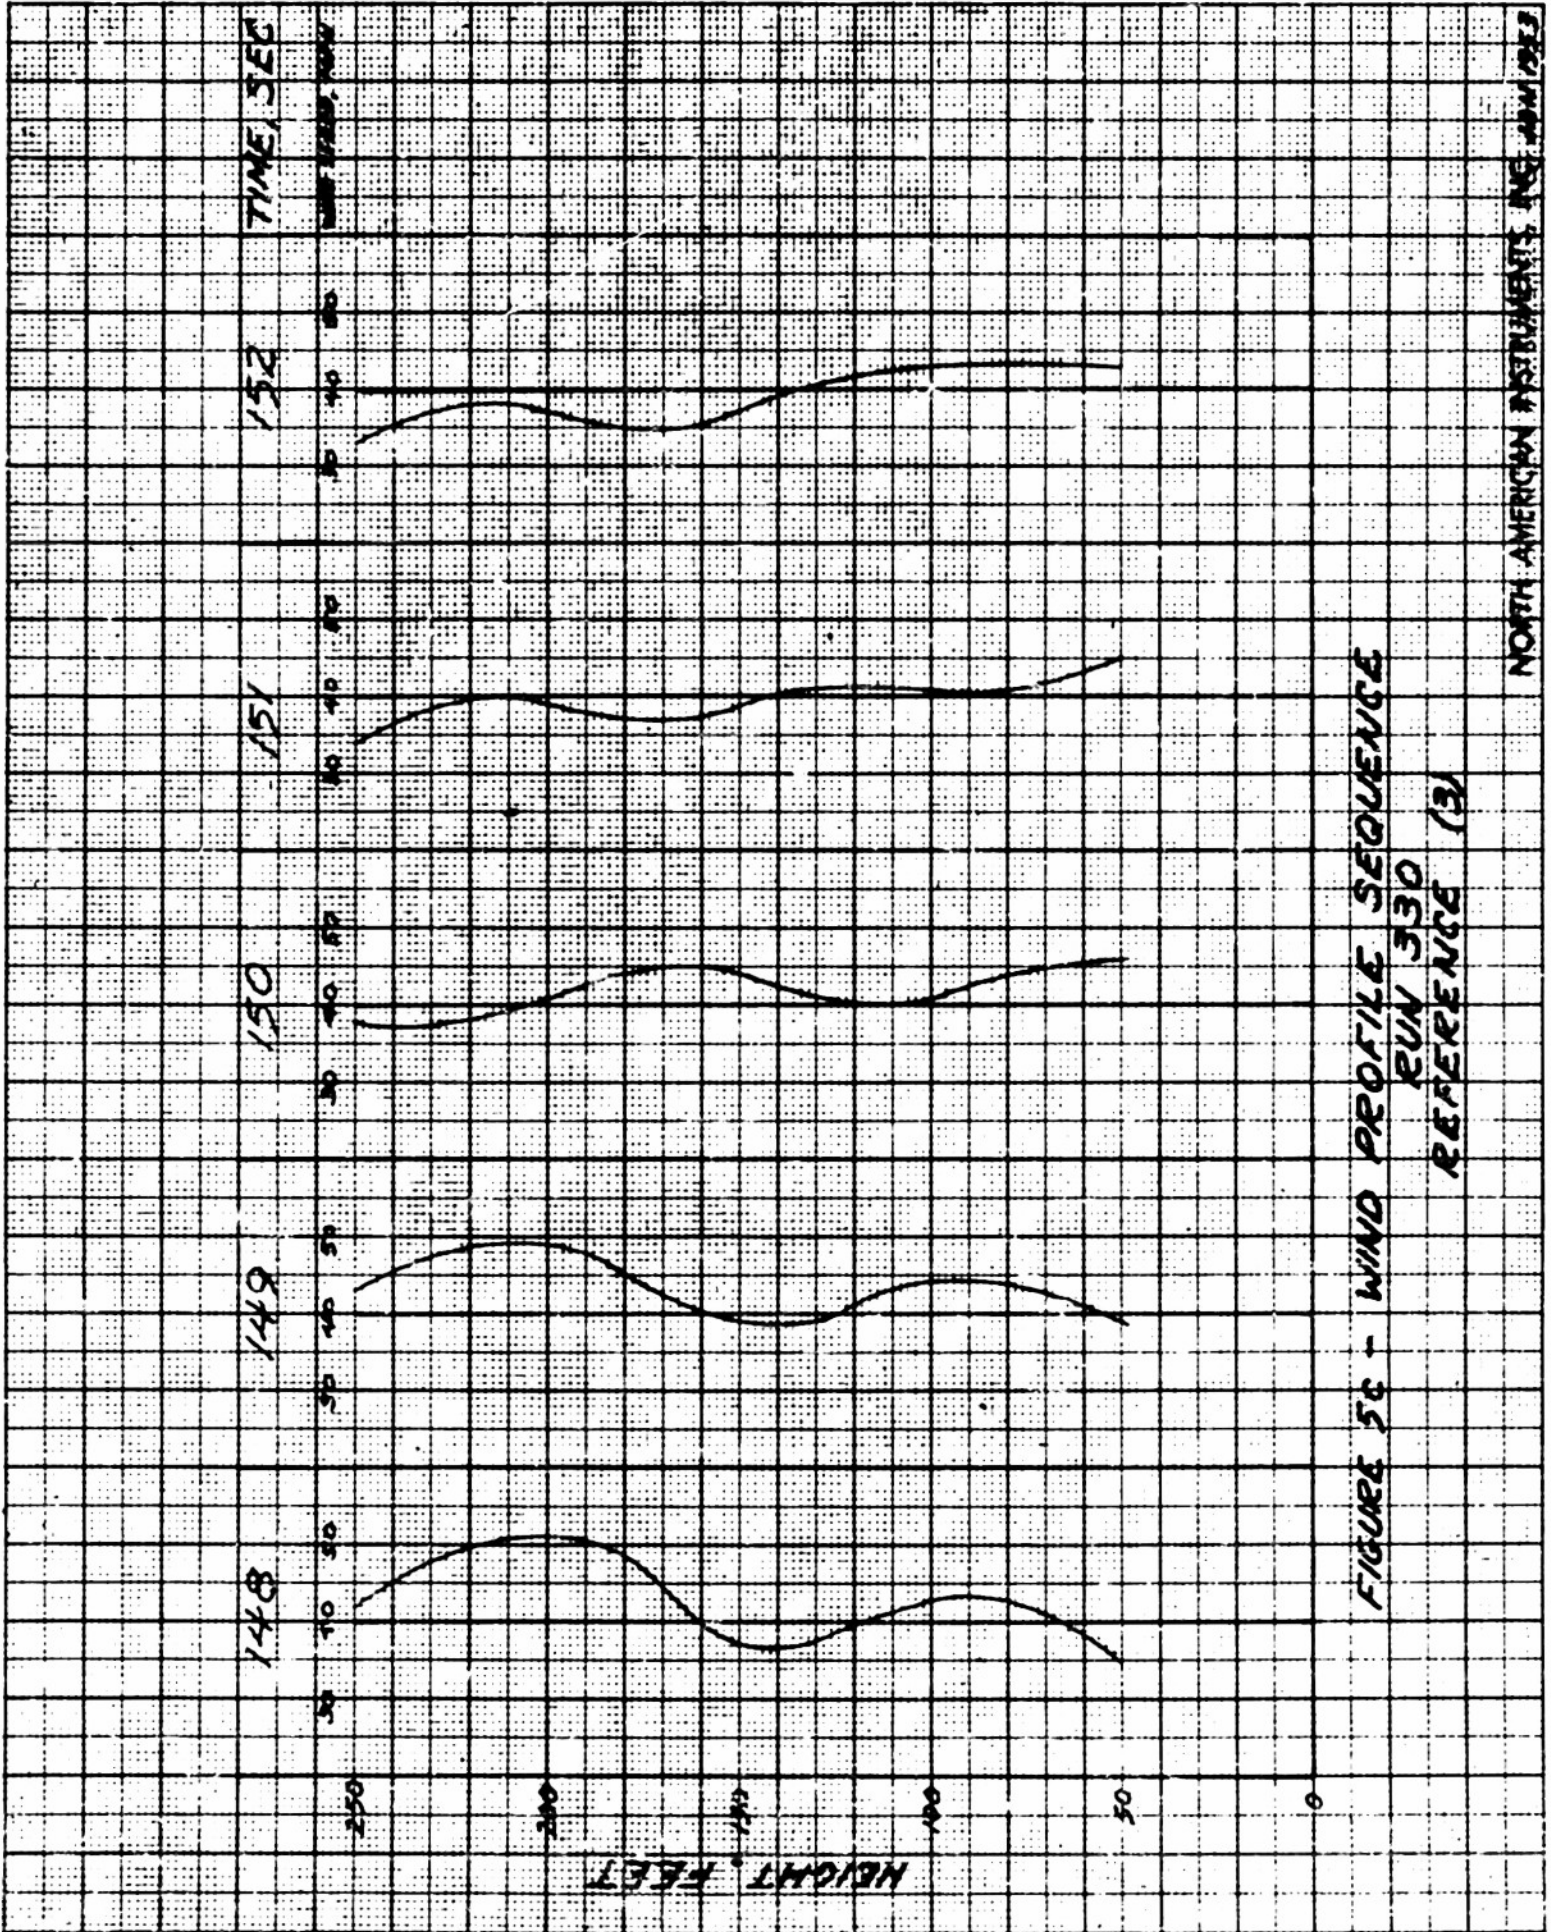


FIGURE 5C - WIND PROFILE SEQUENCE  
RUN 330  
REFERENCE (3)

NORTH AMERICAN INSTRUMENTS, INC. 4444 1963

SECURITY INFORMATION



CONFIDENTIAL  
SECURITY INFORMATION

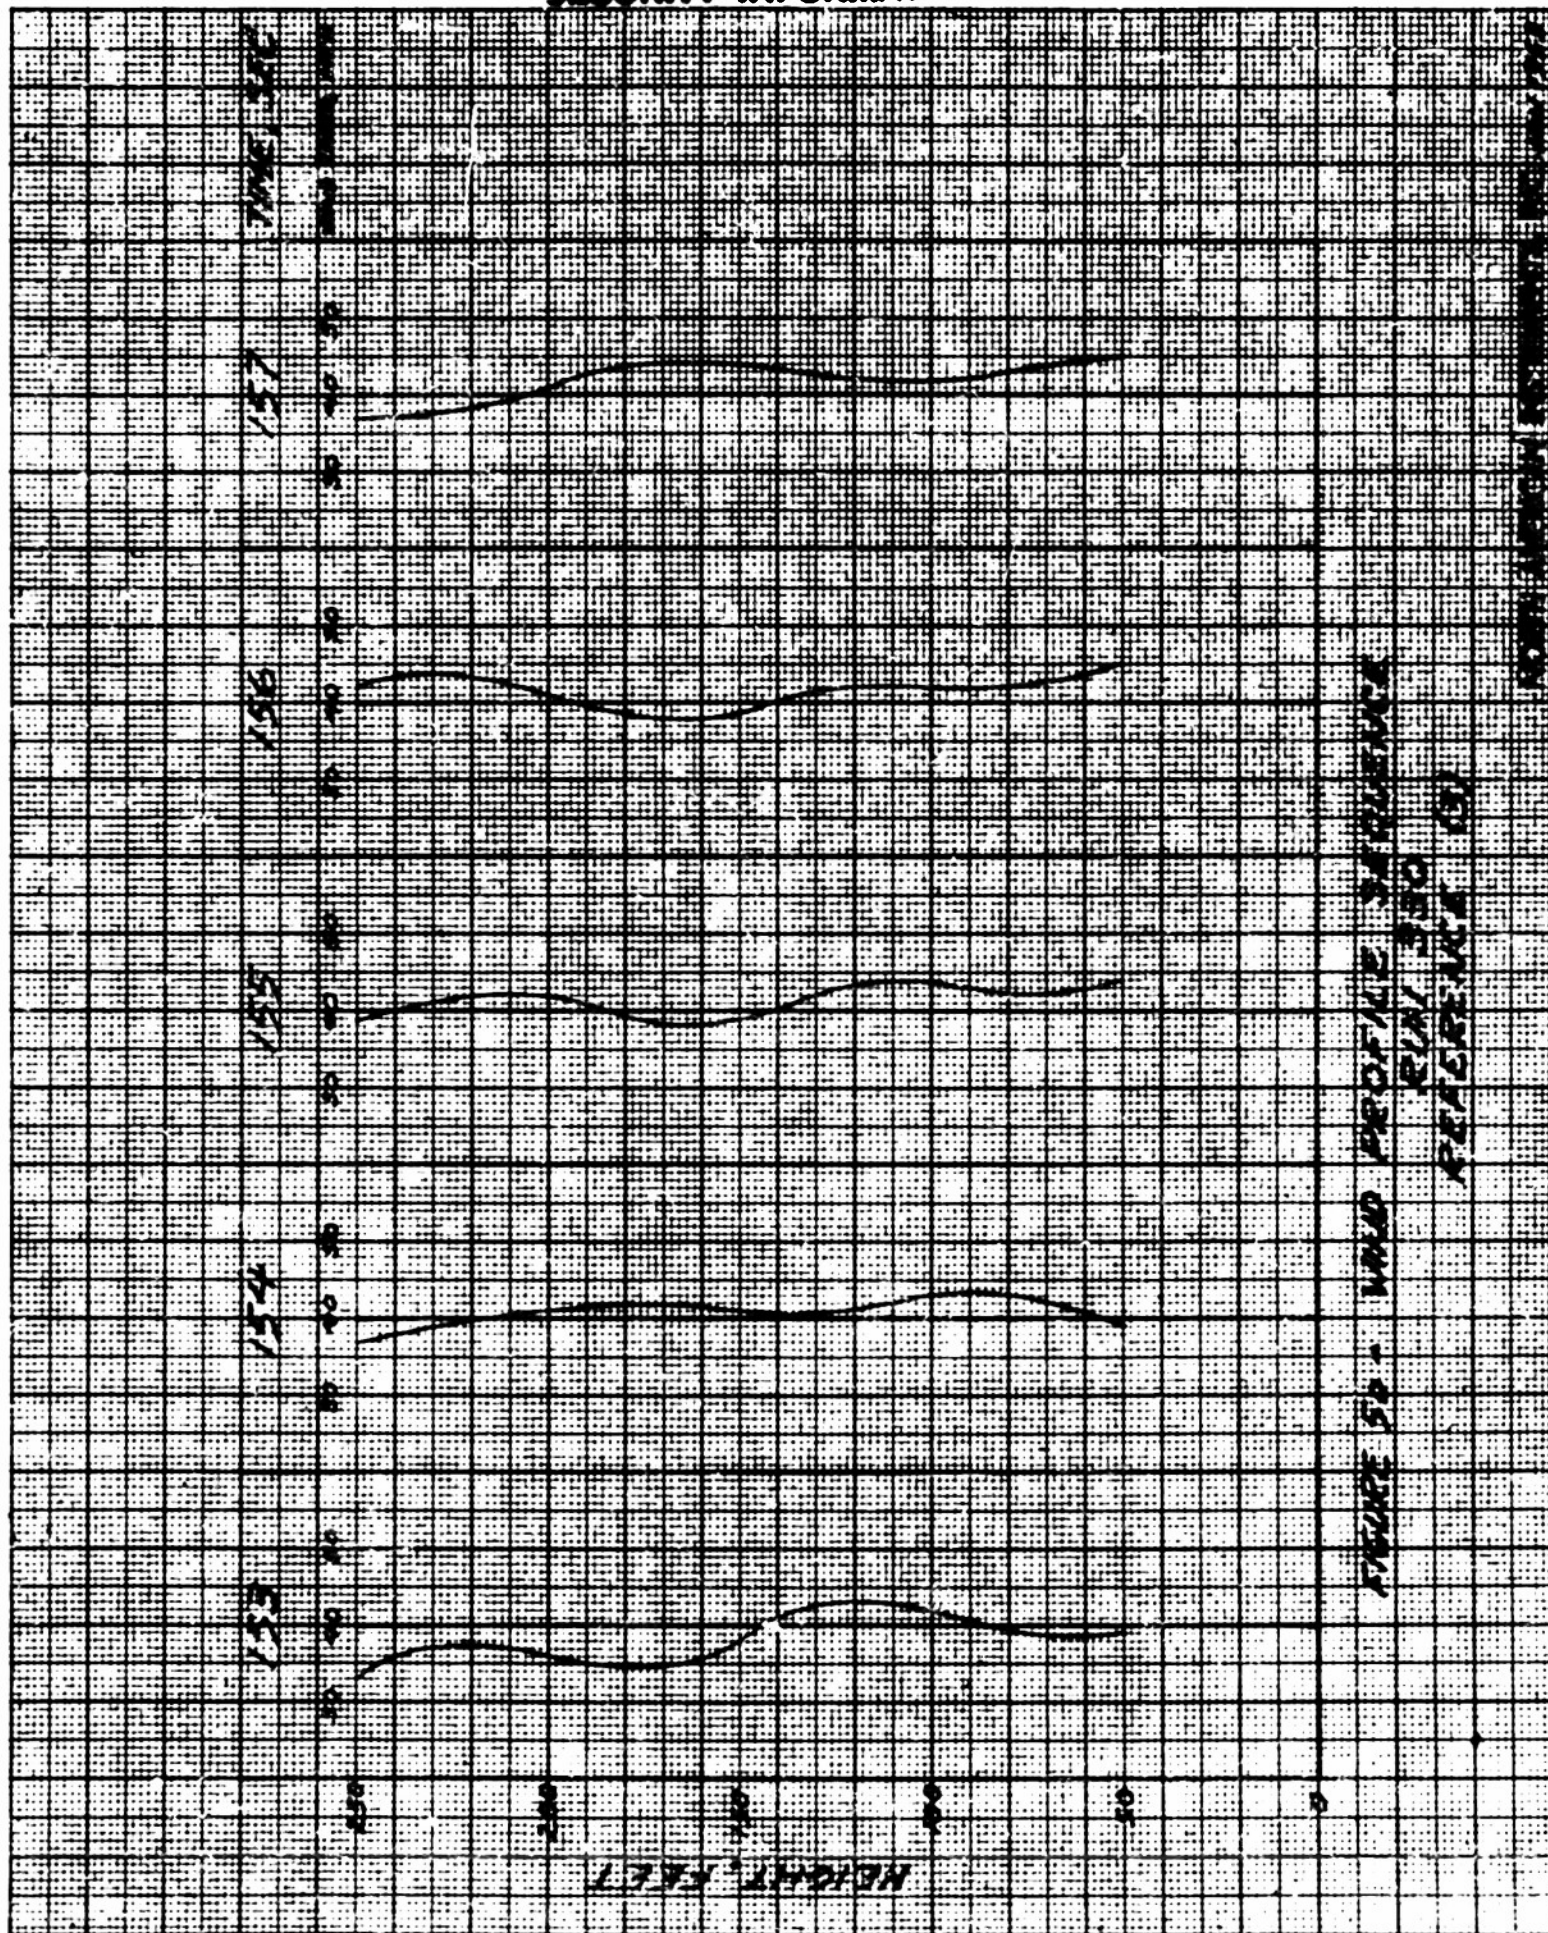



FIGURE 50 - WIND PROFILE SEQUENCE  
RUM 330  
REFERENCE 00

CONFIDENTIAL  
SECURITY INFORMATION



162  
3485 2410

CONFIDENTIAL  
SECURITY INFORMATION

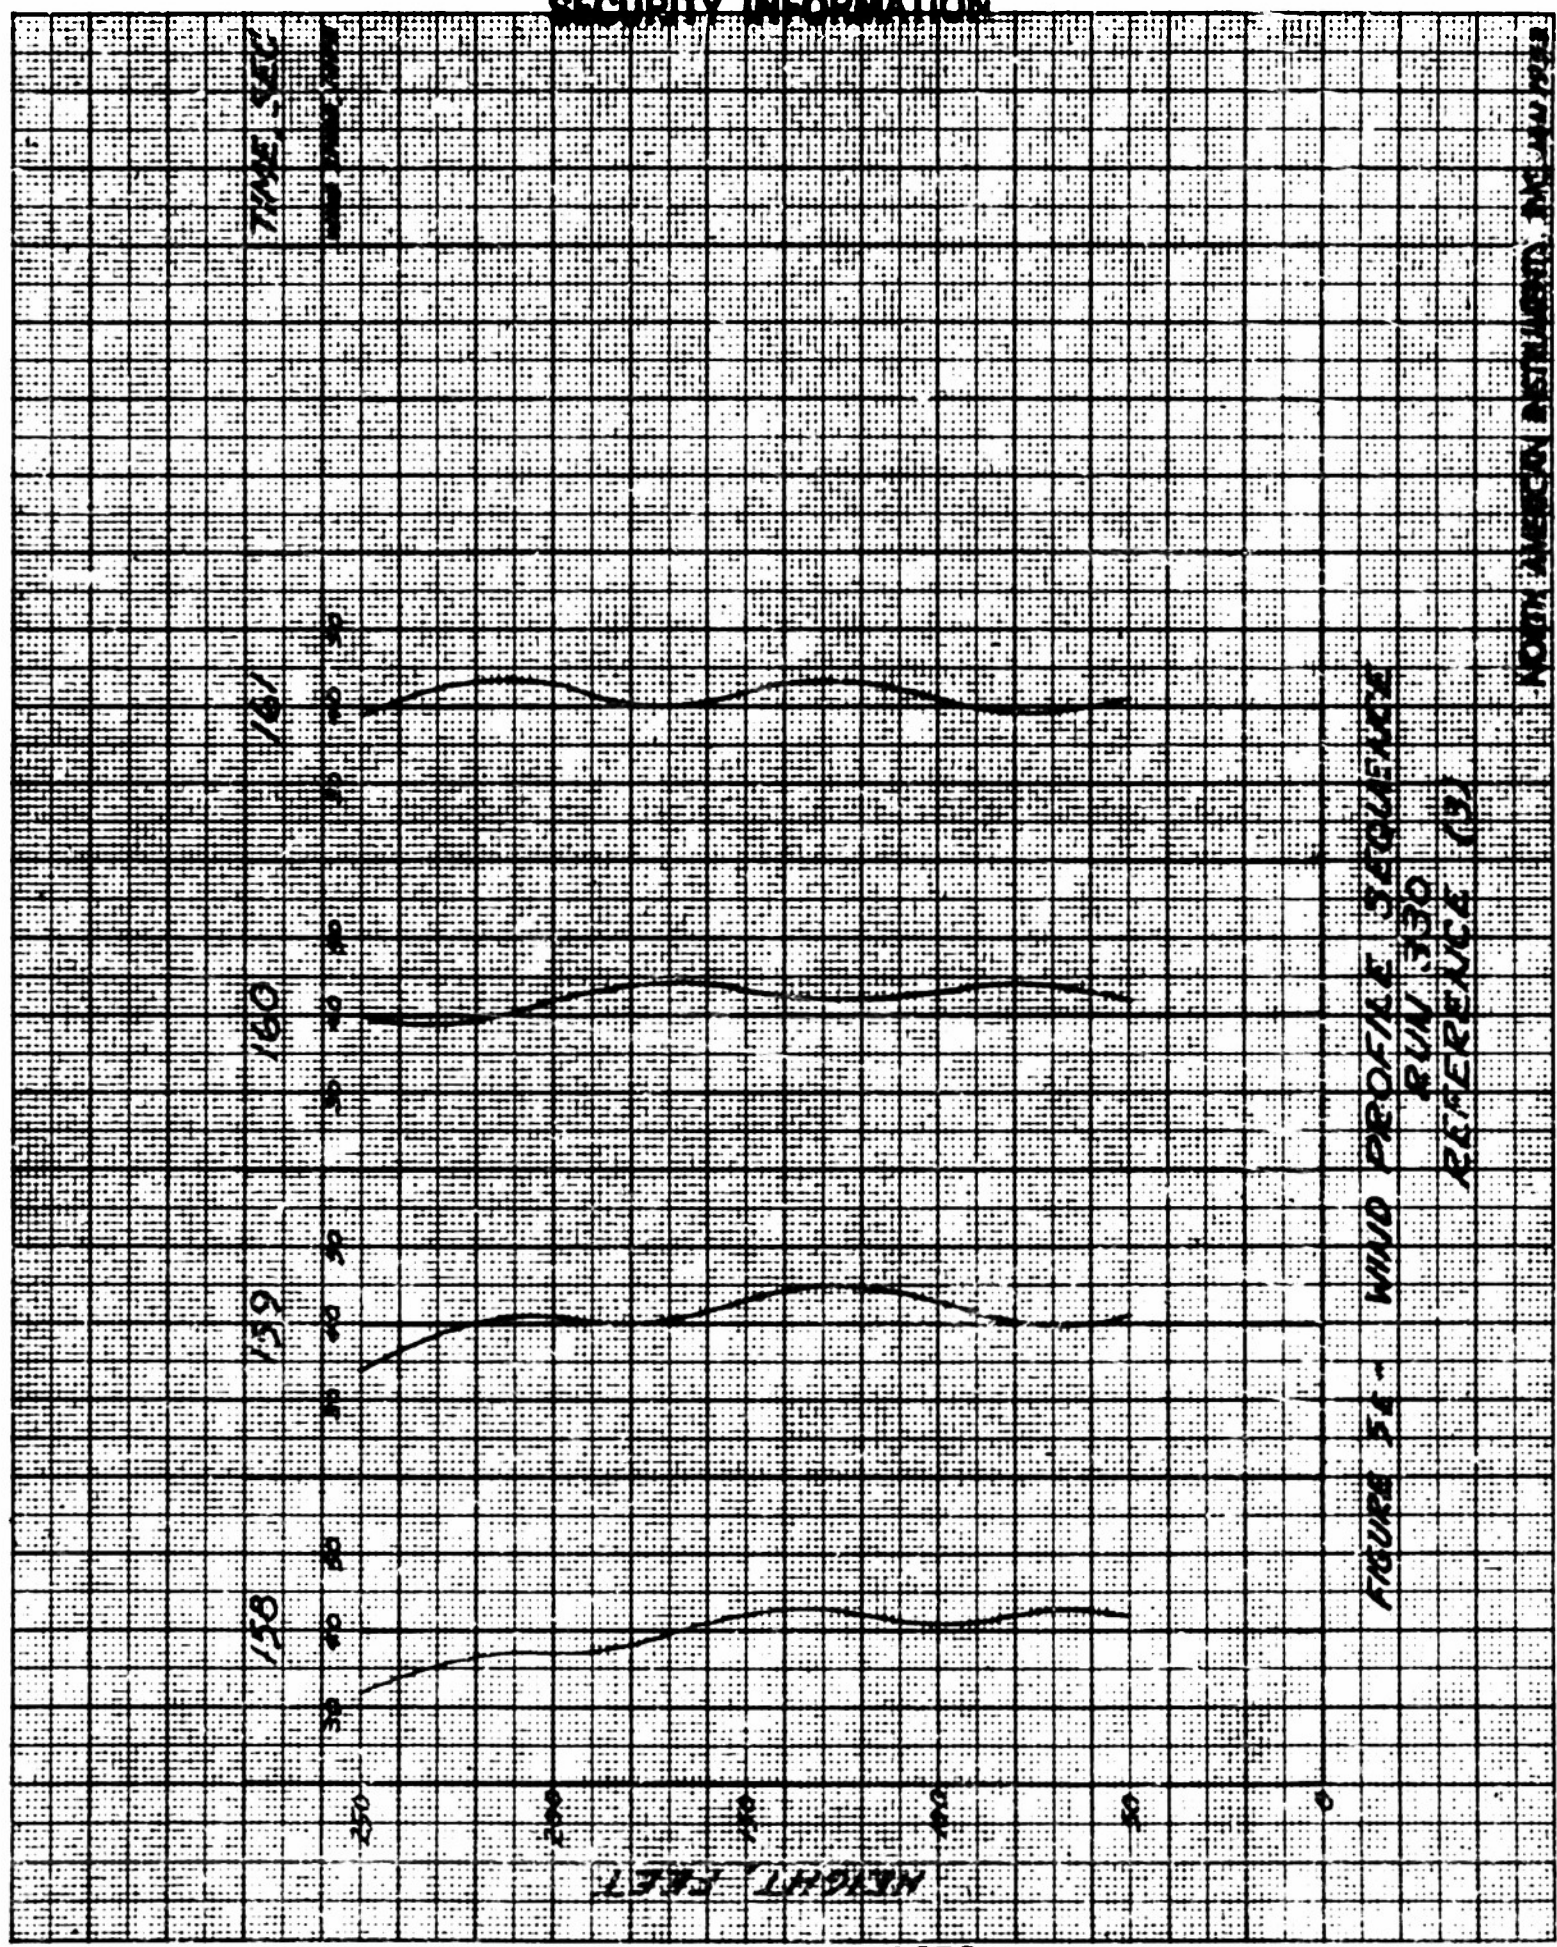

SECURITY INFORMATION

NORTH AMERICAN INSTRUMENTS, INC. 44-111713

162  
SAT 6 5 10

CONFIDENTIAL  
SECURITY INFORMATION

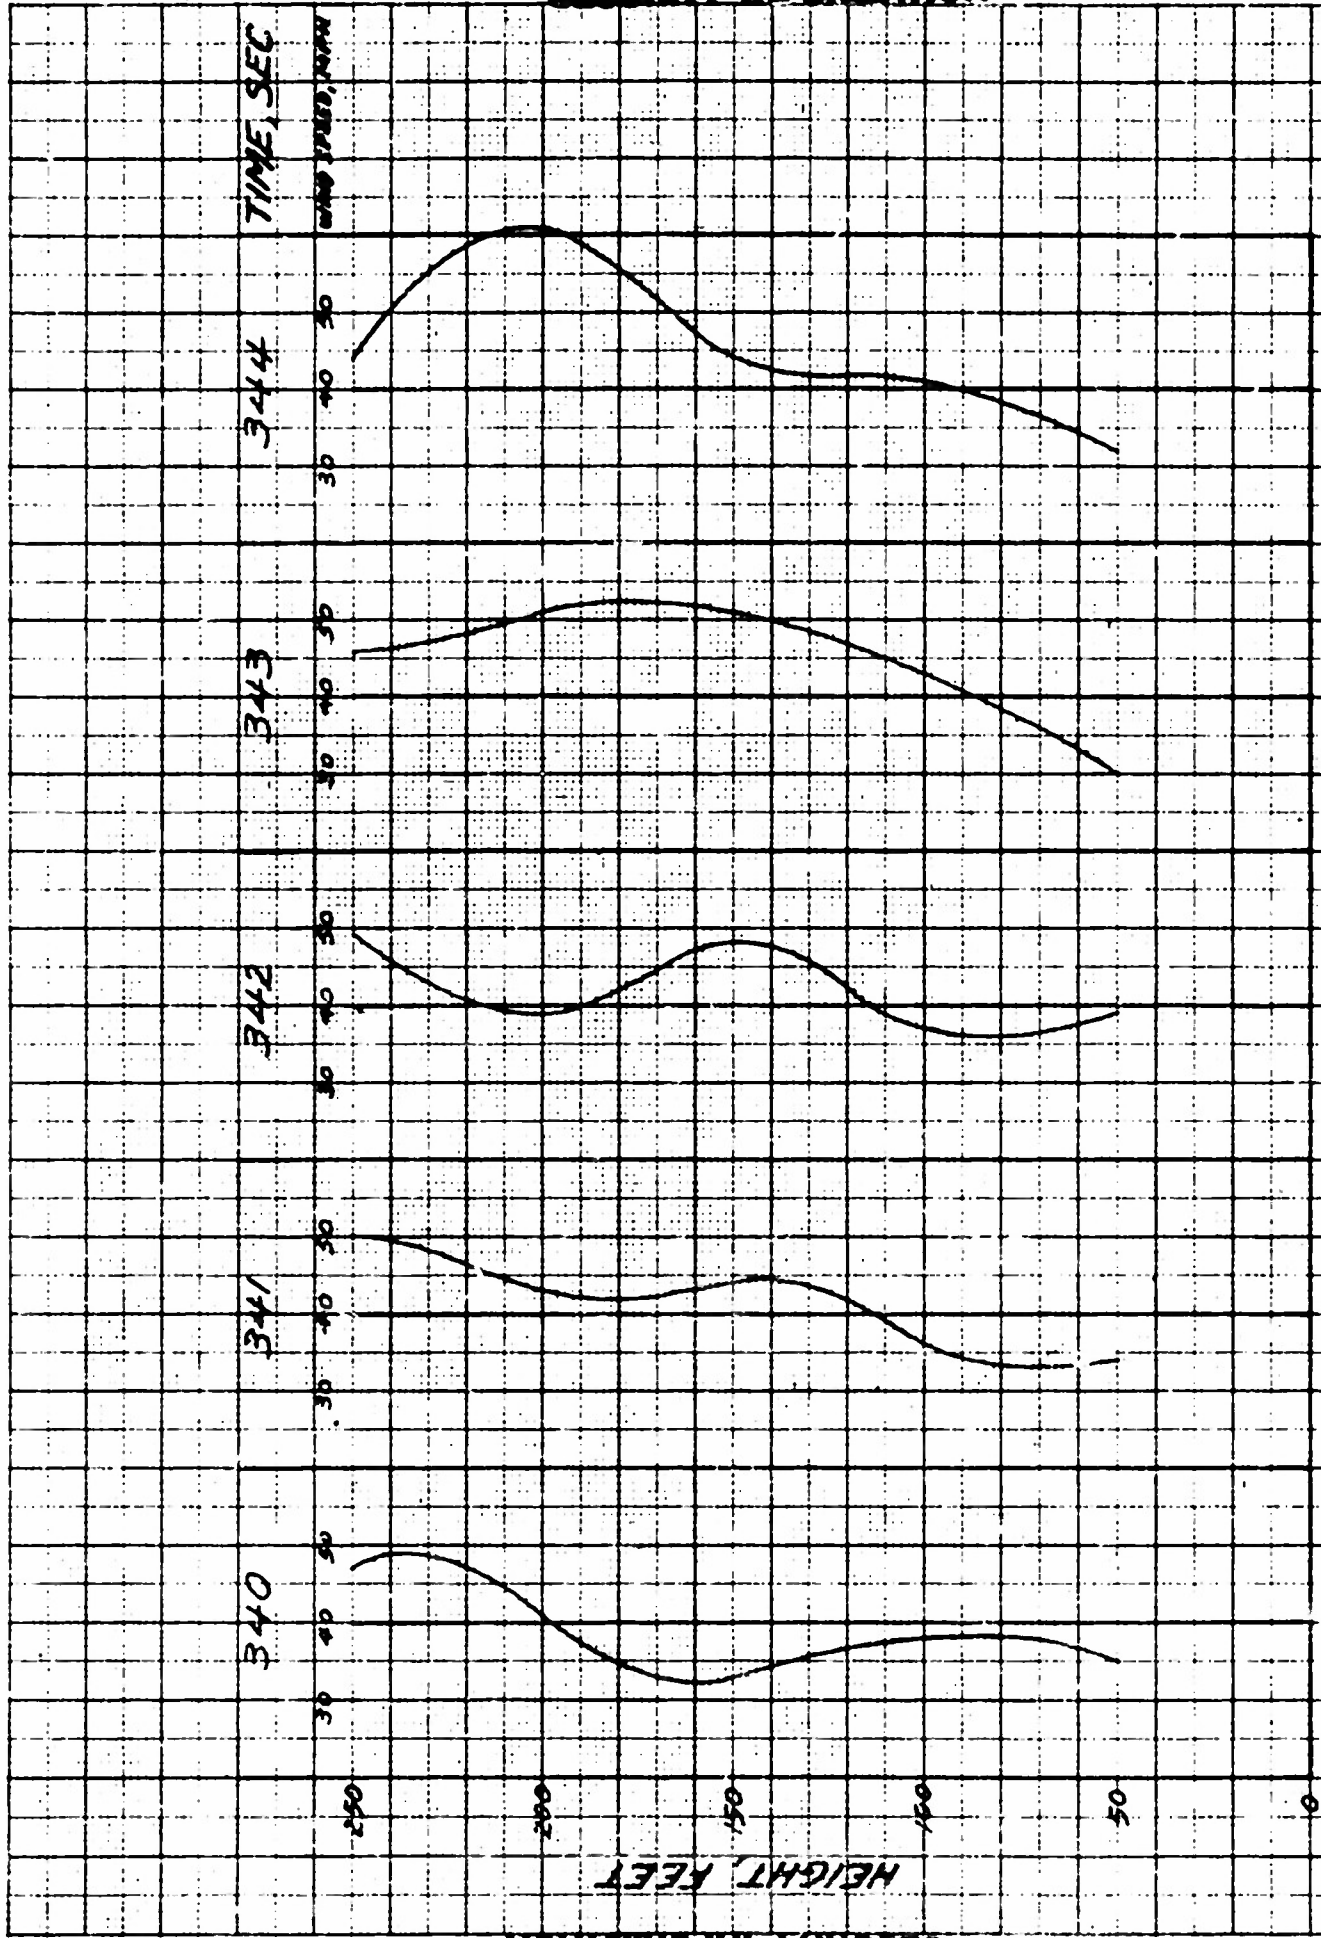


FIGURE 5F - WIND PROFILE SEQUENCE  
RUN 330  
REFERENCE (3)

CONFIDENTIAL  
SECURITY INFORMATION

NORTH AMERICAN INSTRUMENTS, INC. 1-2-1963



192  
sh 7 d 10

CONFIDENTIAL  
SECURITY INFORMATION

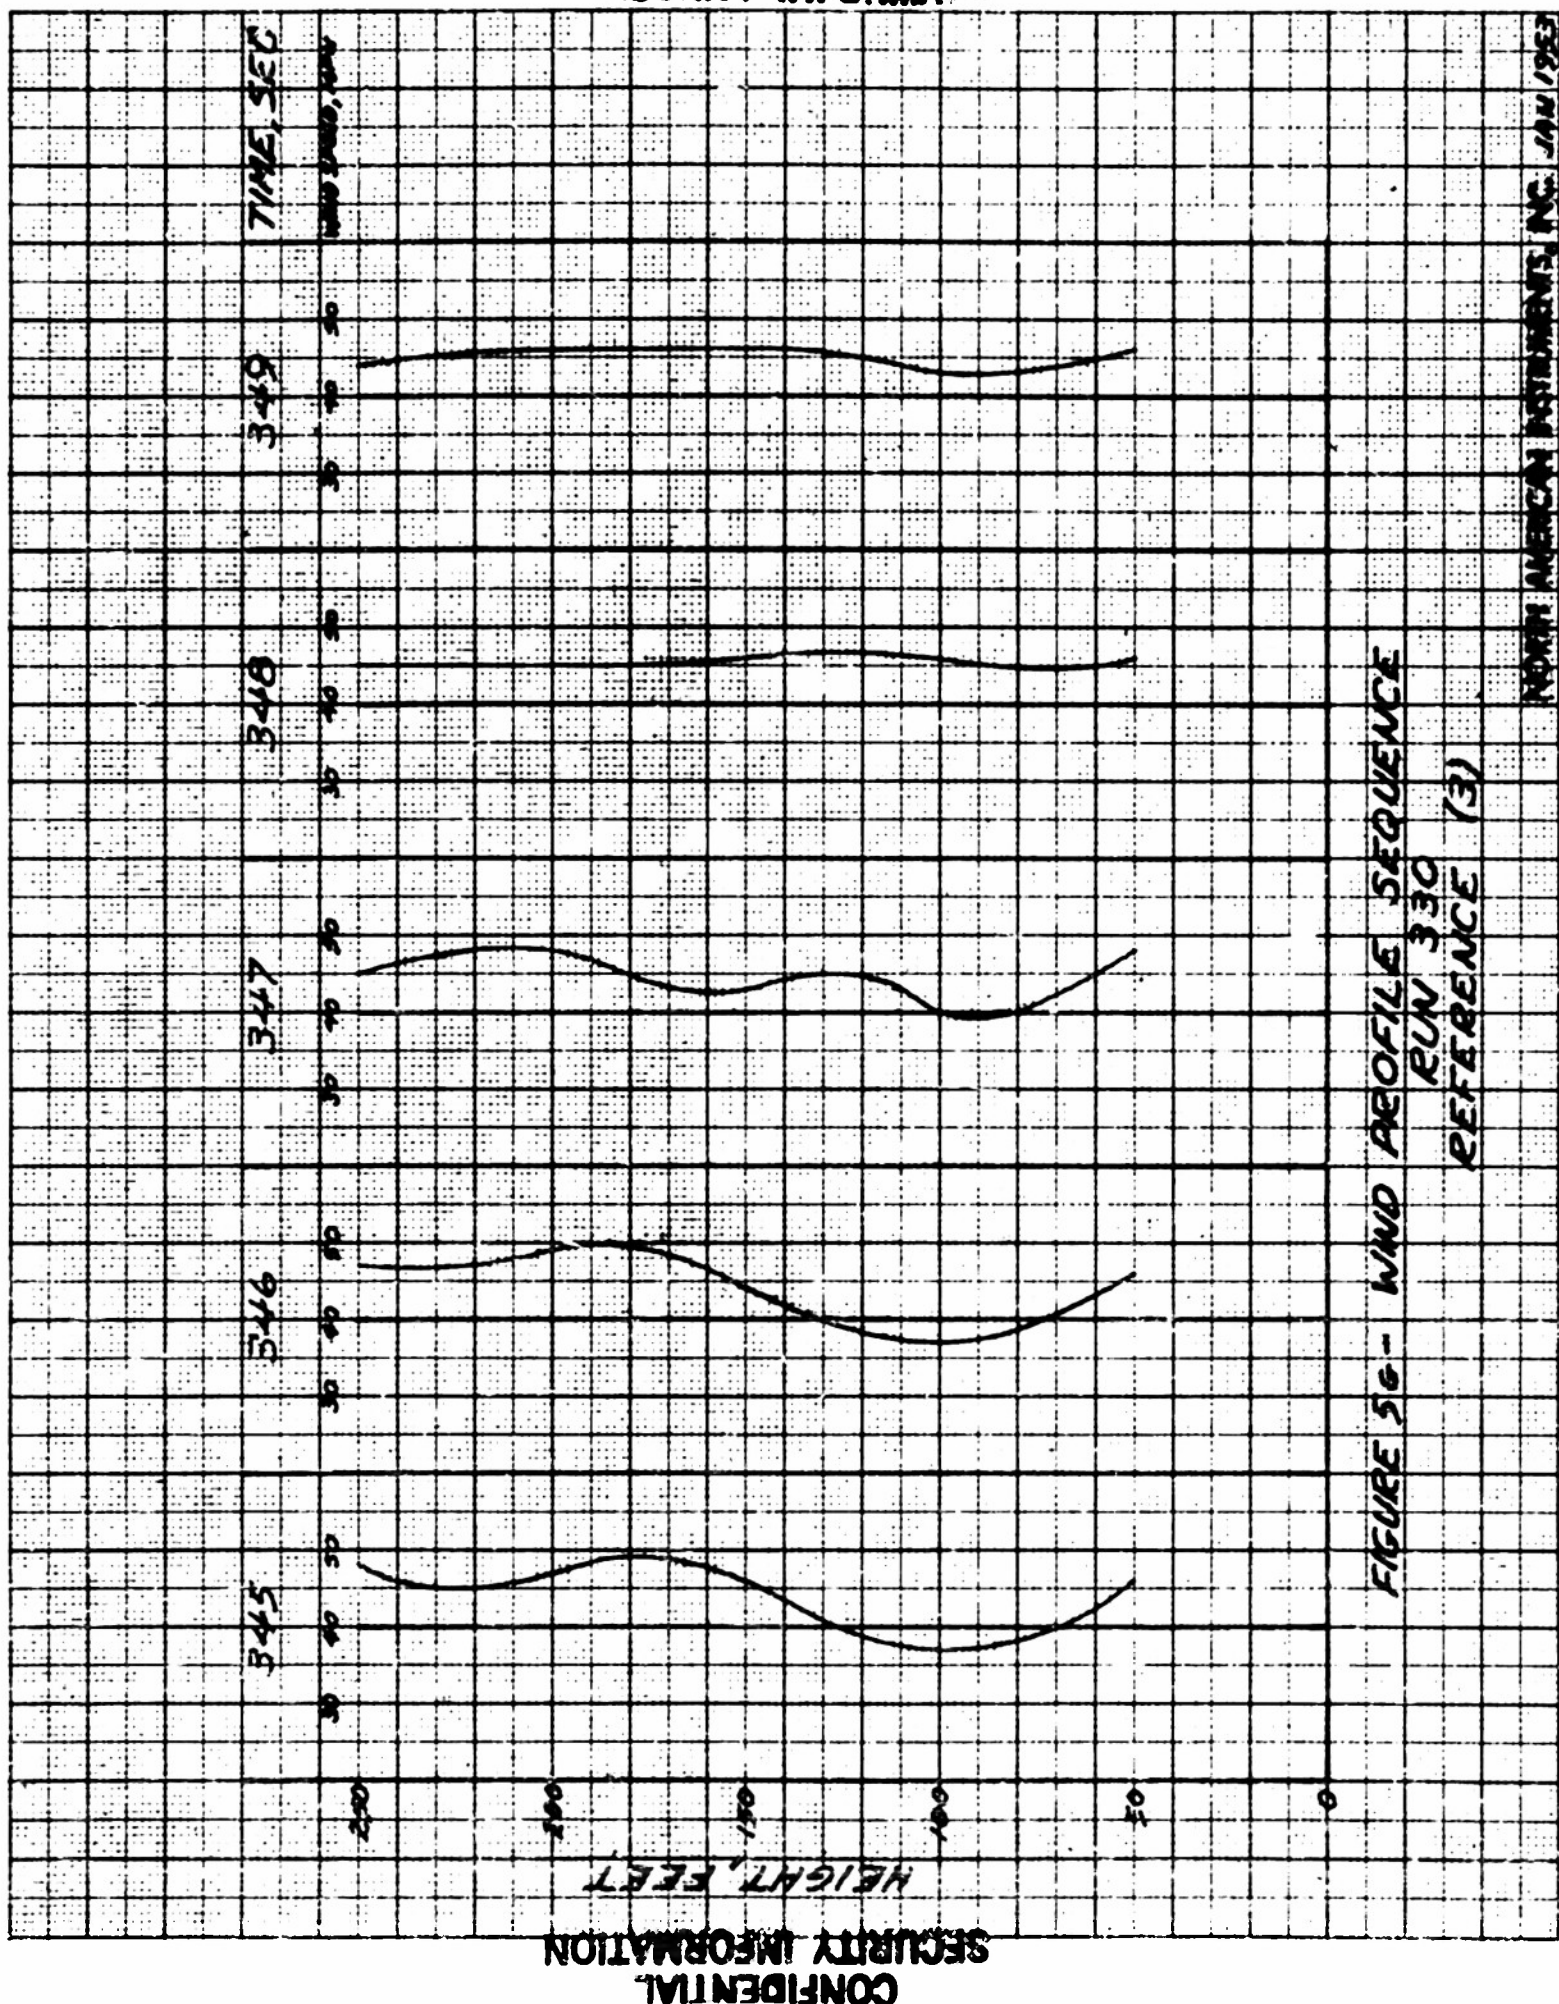


FIGURE 56- WIND PROFILE SEQUENCE  
RUN 330  
REFERENCE (3)

CONFIDENTIAL  
SECURITY INFORMATION



CONFIDENTIAL  
SECURITY INFORMATION

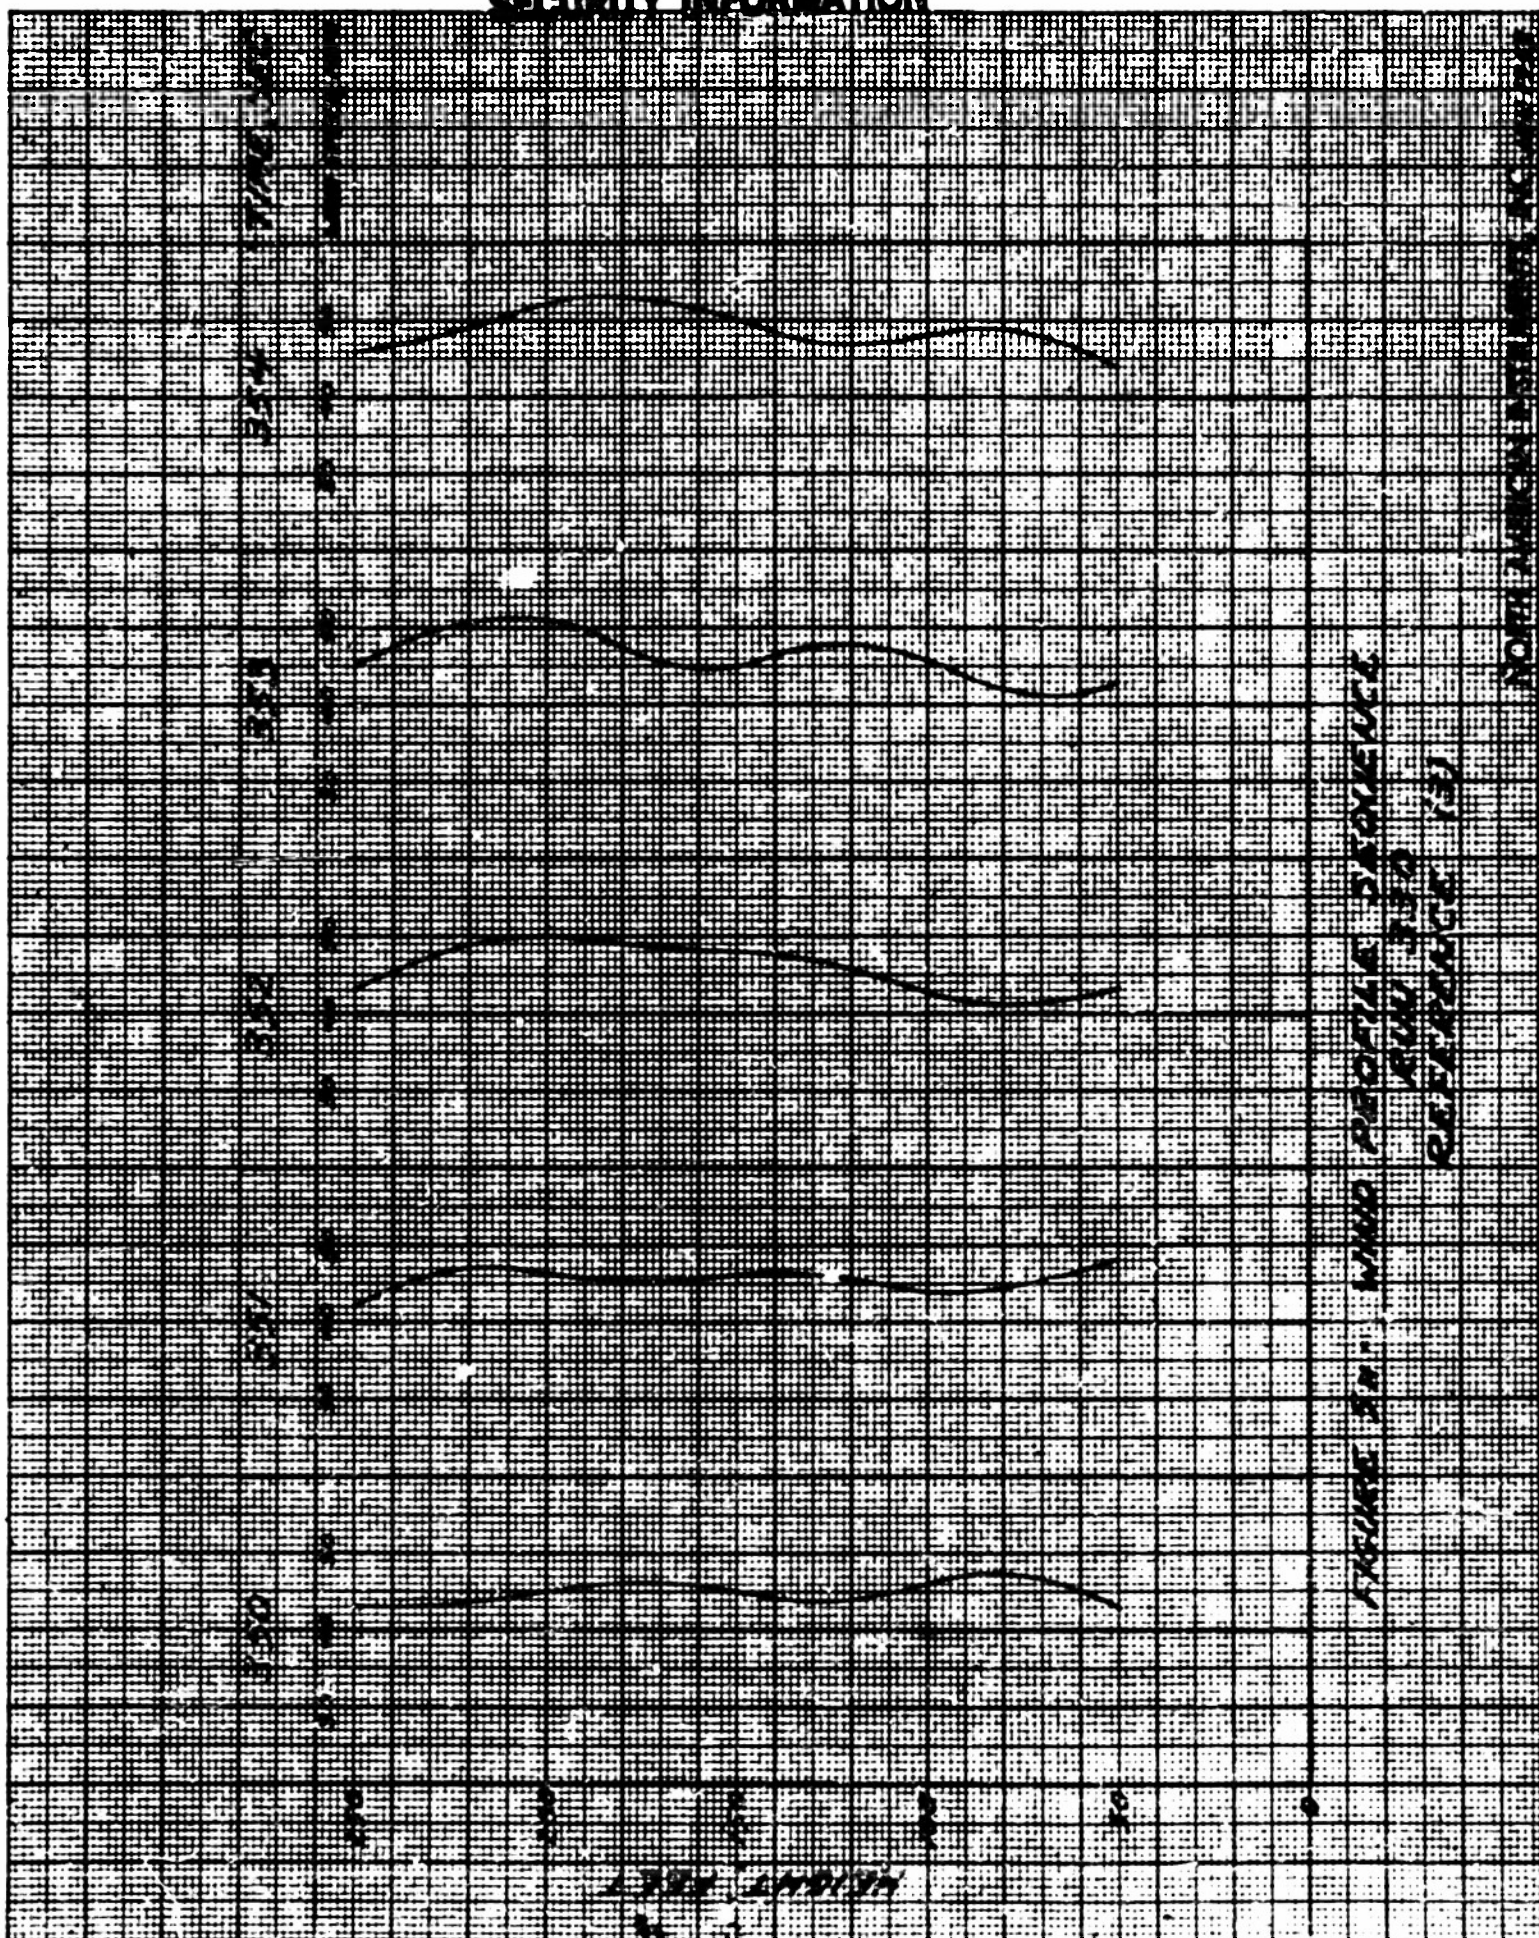


FIGURE 1. WIND PROFILE SAMPLE  
RUN 130  
REFERENCE (1)

NOT A LAMINAR FLOW

CONFIDENTIAL  
SECURITY INFORMATION

162  
291  
2550-000



CONFIDENTIAL  
SECURITY INFORMATION

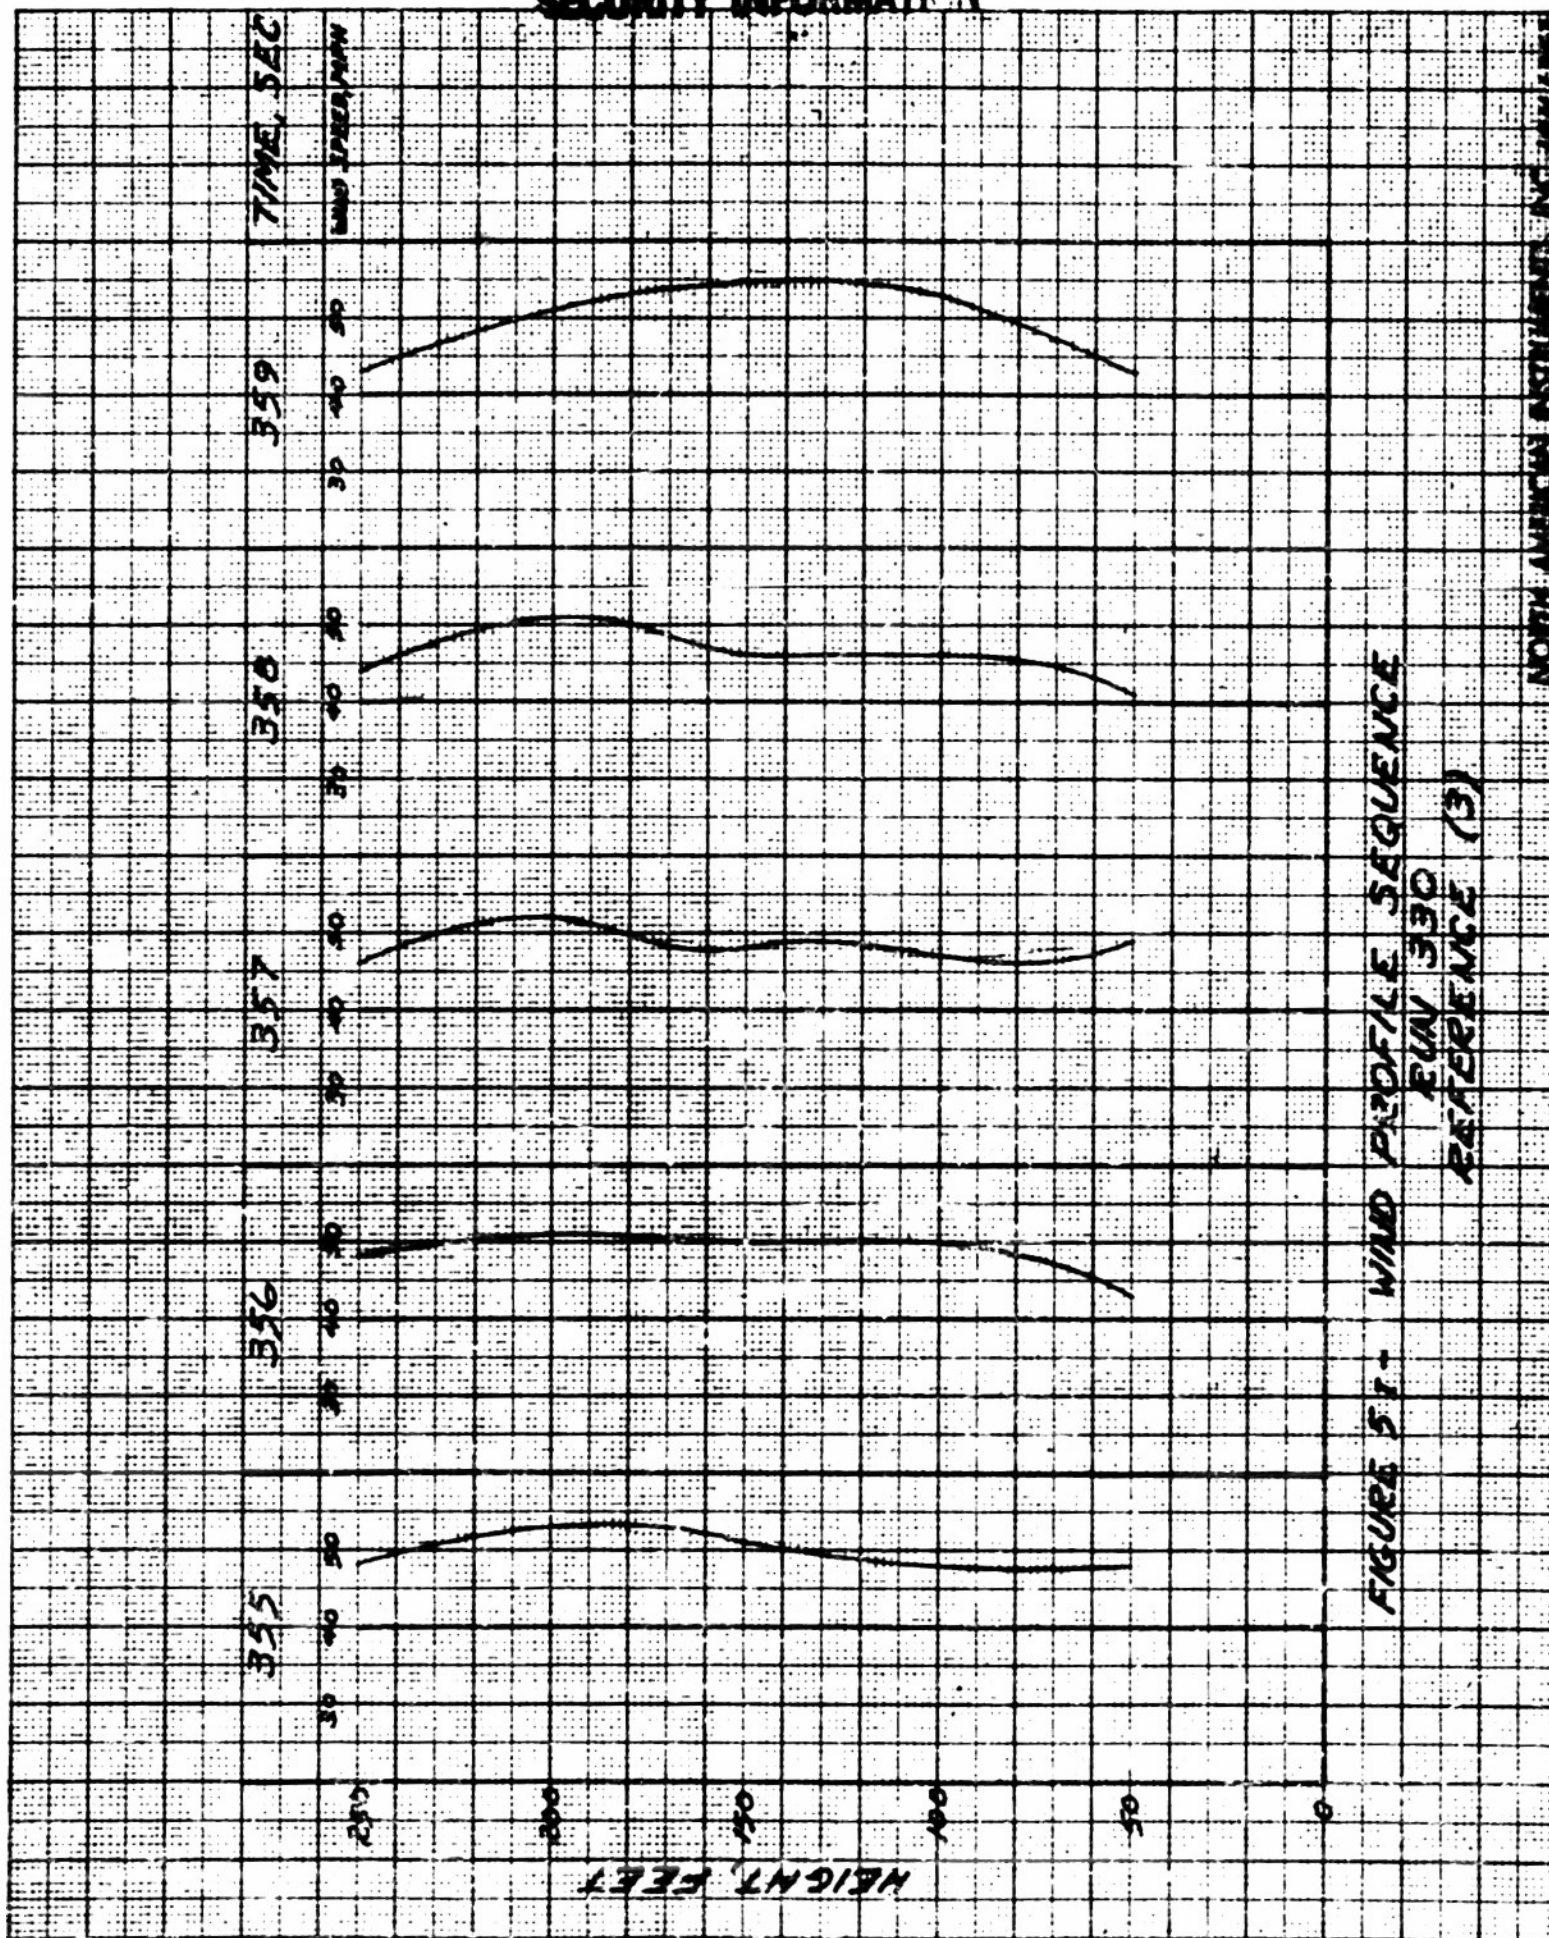


FIGURE 51 - WIND PROFILE SEQUENCE  
RUN 330  
REFERENCE (3)

CONFIDENTIAL  
SECURITY INFORMATION

NORTH AMERICAN ESTIMATES AND FORECASTS

102  
2410200

**CONFIDENTIAL**  
**SECURITY INFORMATION**

TIME, SEC

WIND SPEED, MPH

360 361

250 30 40 50

200

100

50

0

HEIGHT, FEET

FIGURE 5J - WIND PROFILE SEQUENCE  
RUN 330  
REFERENCE (3)

NORTH AMERICAN INSTRUMENTS, INC. JAN 1962

**CONFIDENTIAL**  
**SECURITY INFORMATION**



CONFIDENTIAL  
SECURITY INFORMATION

163  
3471-1-66

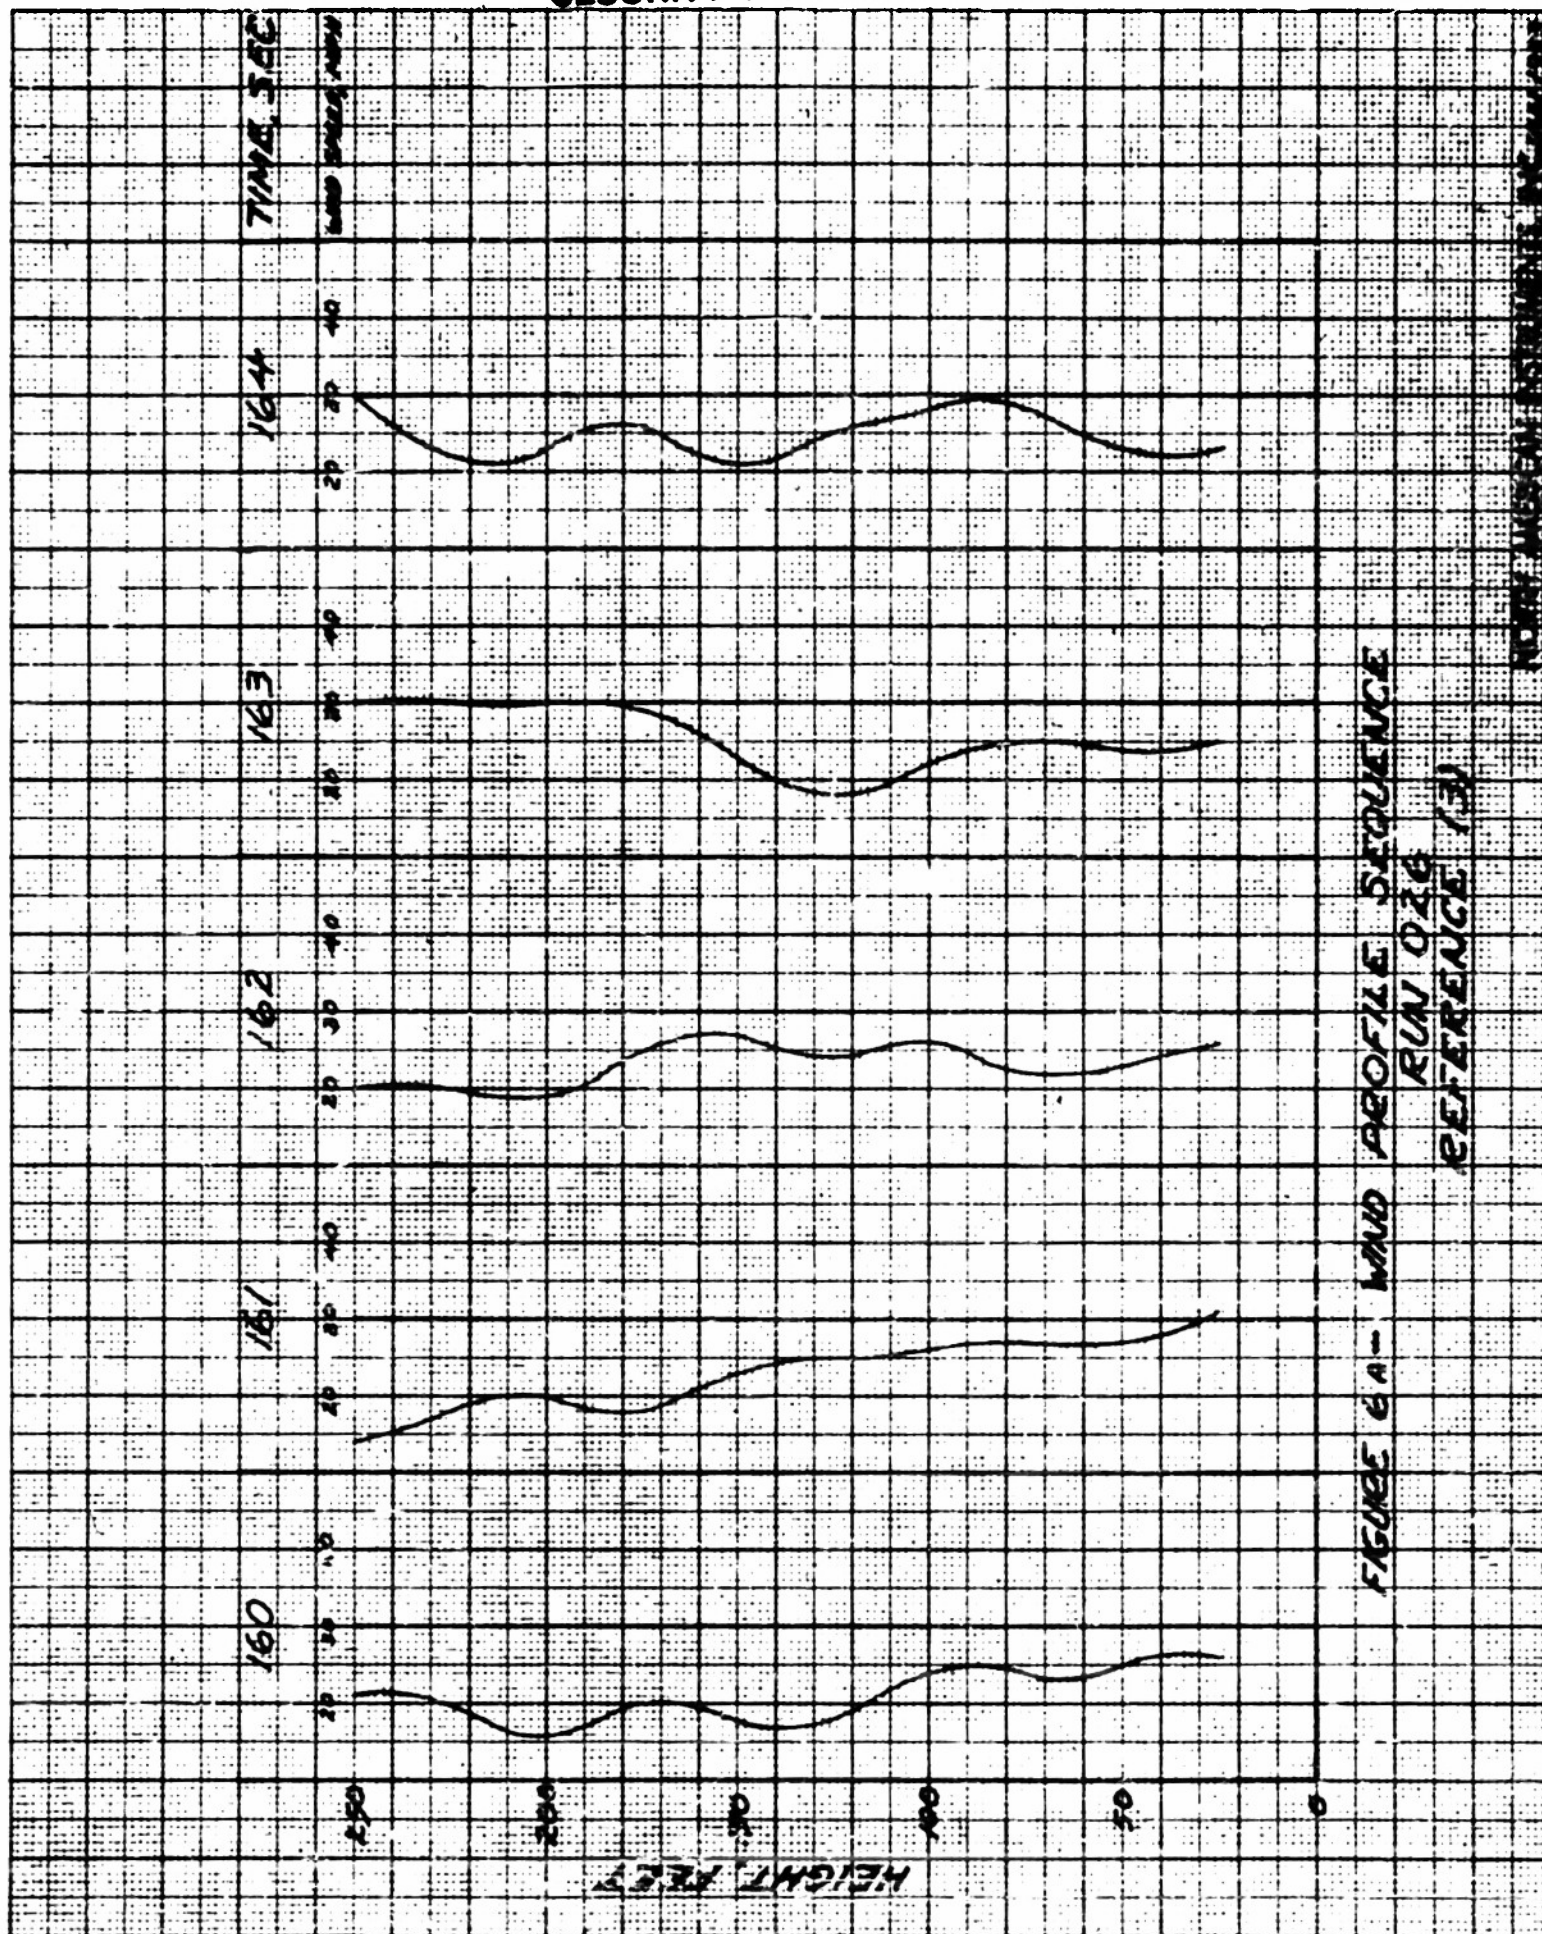


FIGURE 6A-- WIND PROFILE SEQUENCE  
RUN 026  
REFERENCE (3)

CONFIDENTIAL  
SECURITY INFORMATION

CONFIDENTIAL  
SECURITY INFORMATION

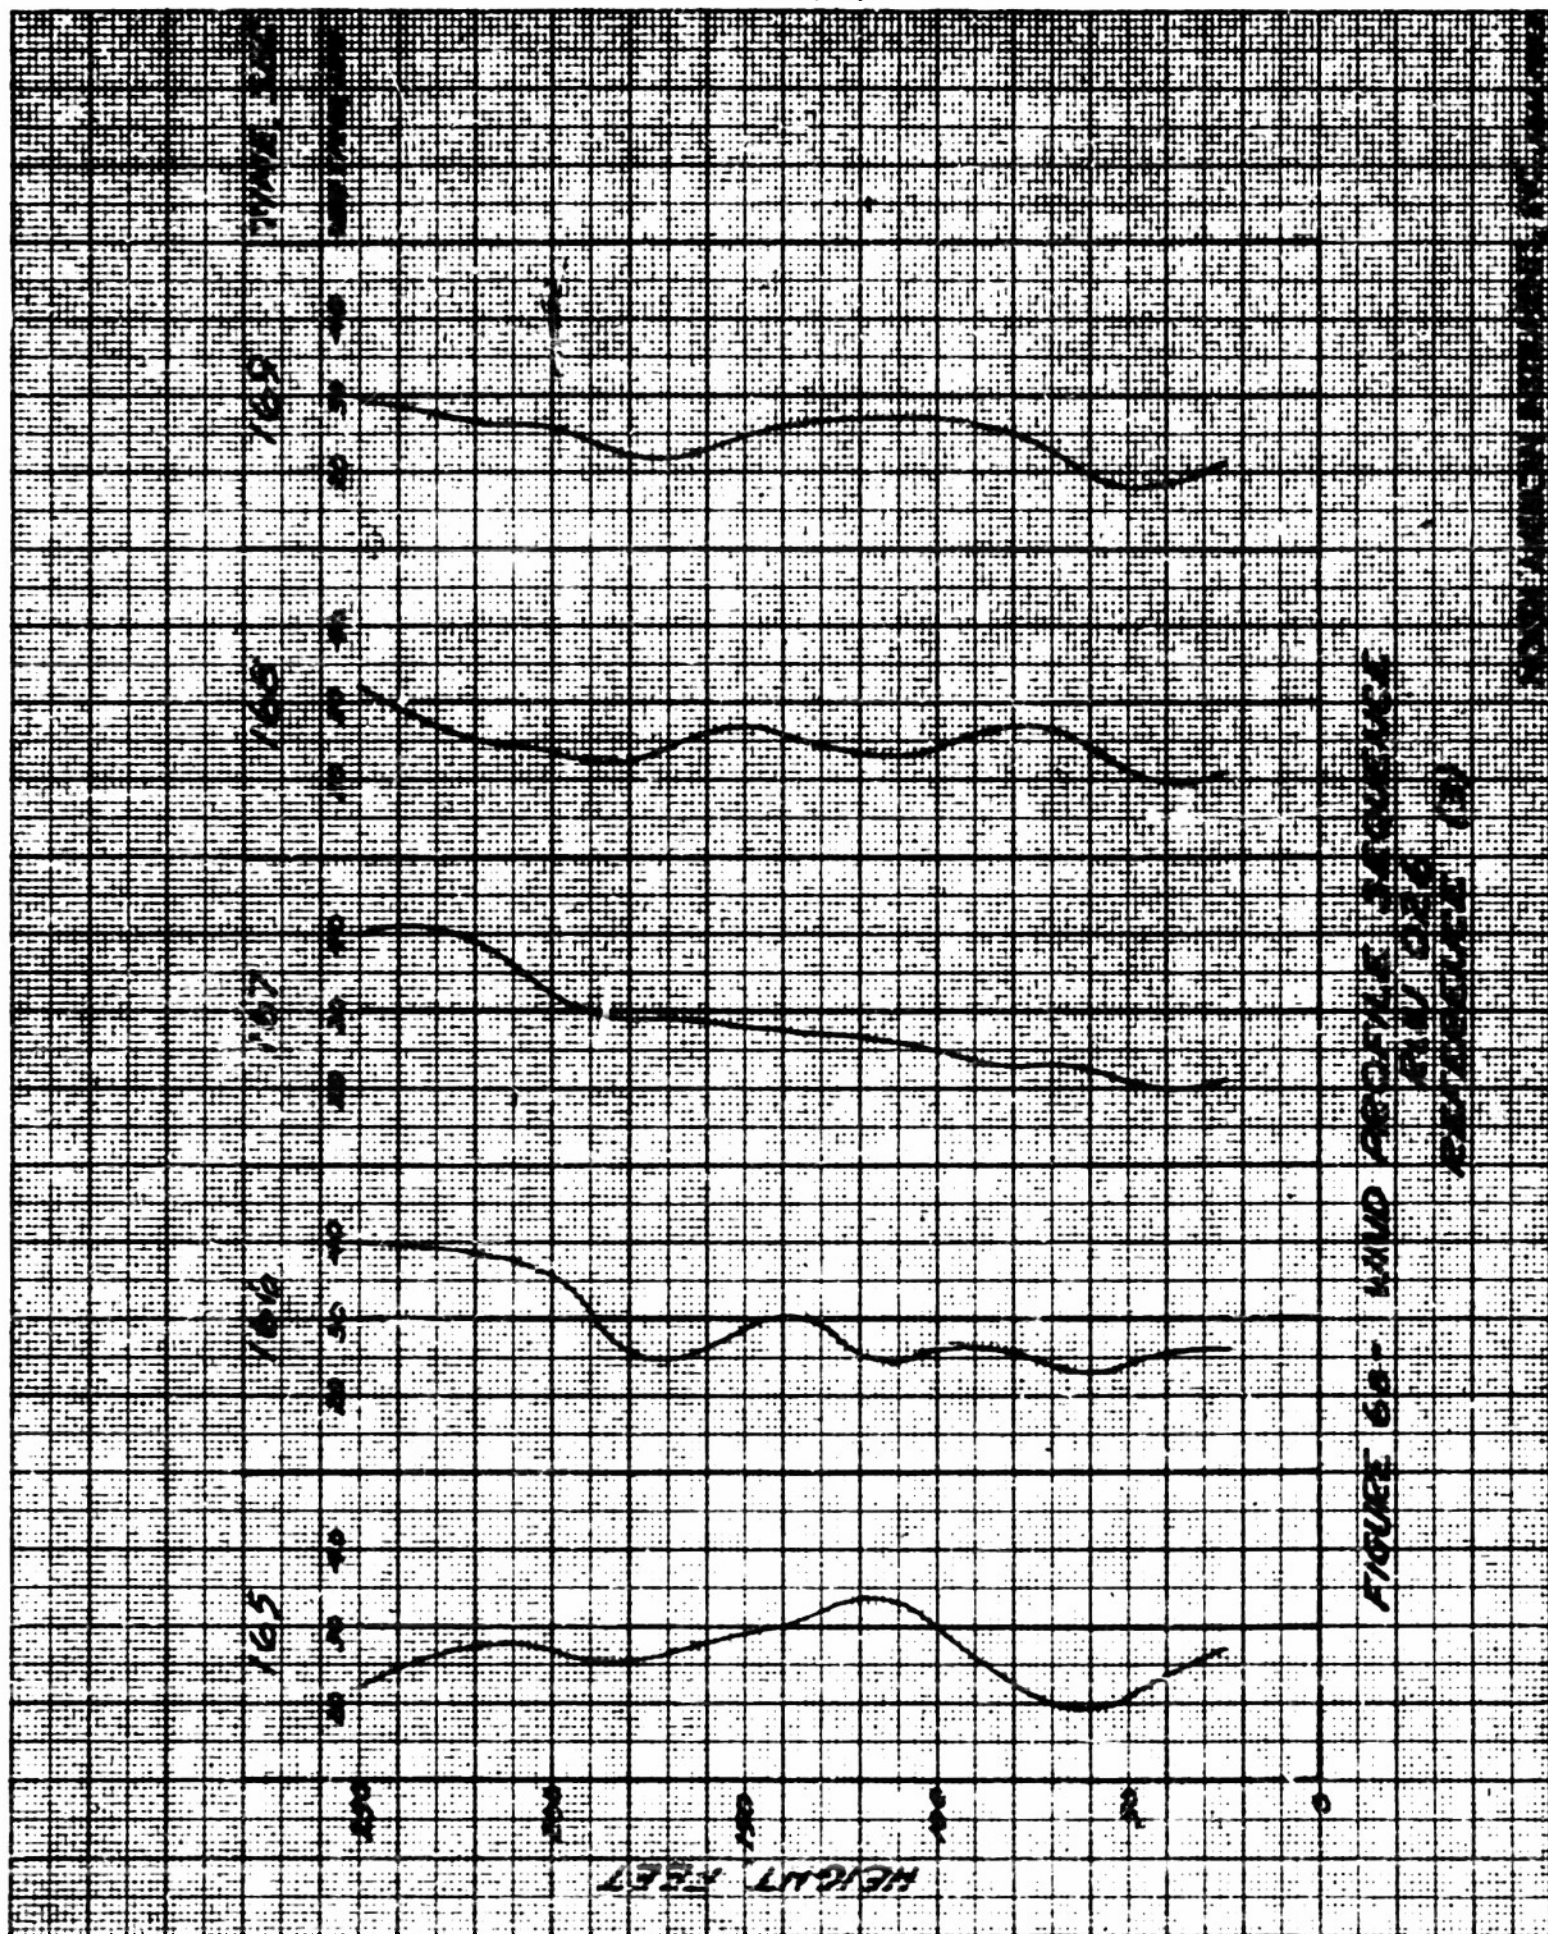


FIGURE 68- WIND PROFILE SEQUENCE  
165, 164, 167, 169, 168

CONFIDENTIAL  
SECURITY INFORMATION

163  
300000



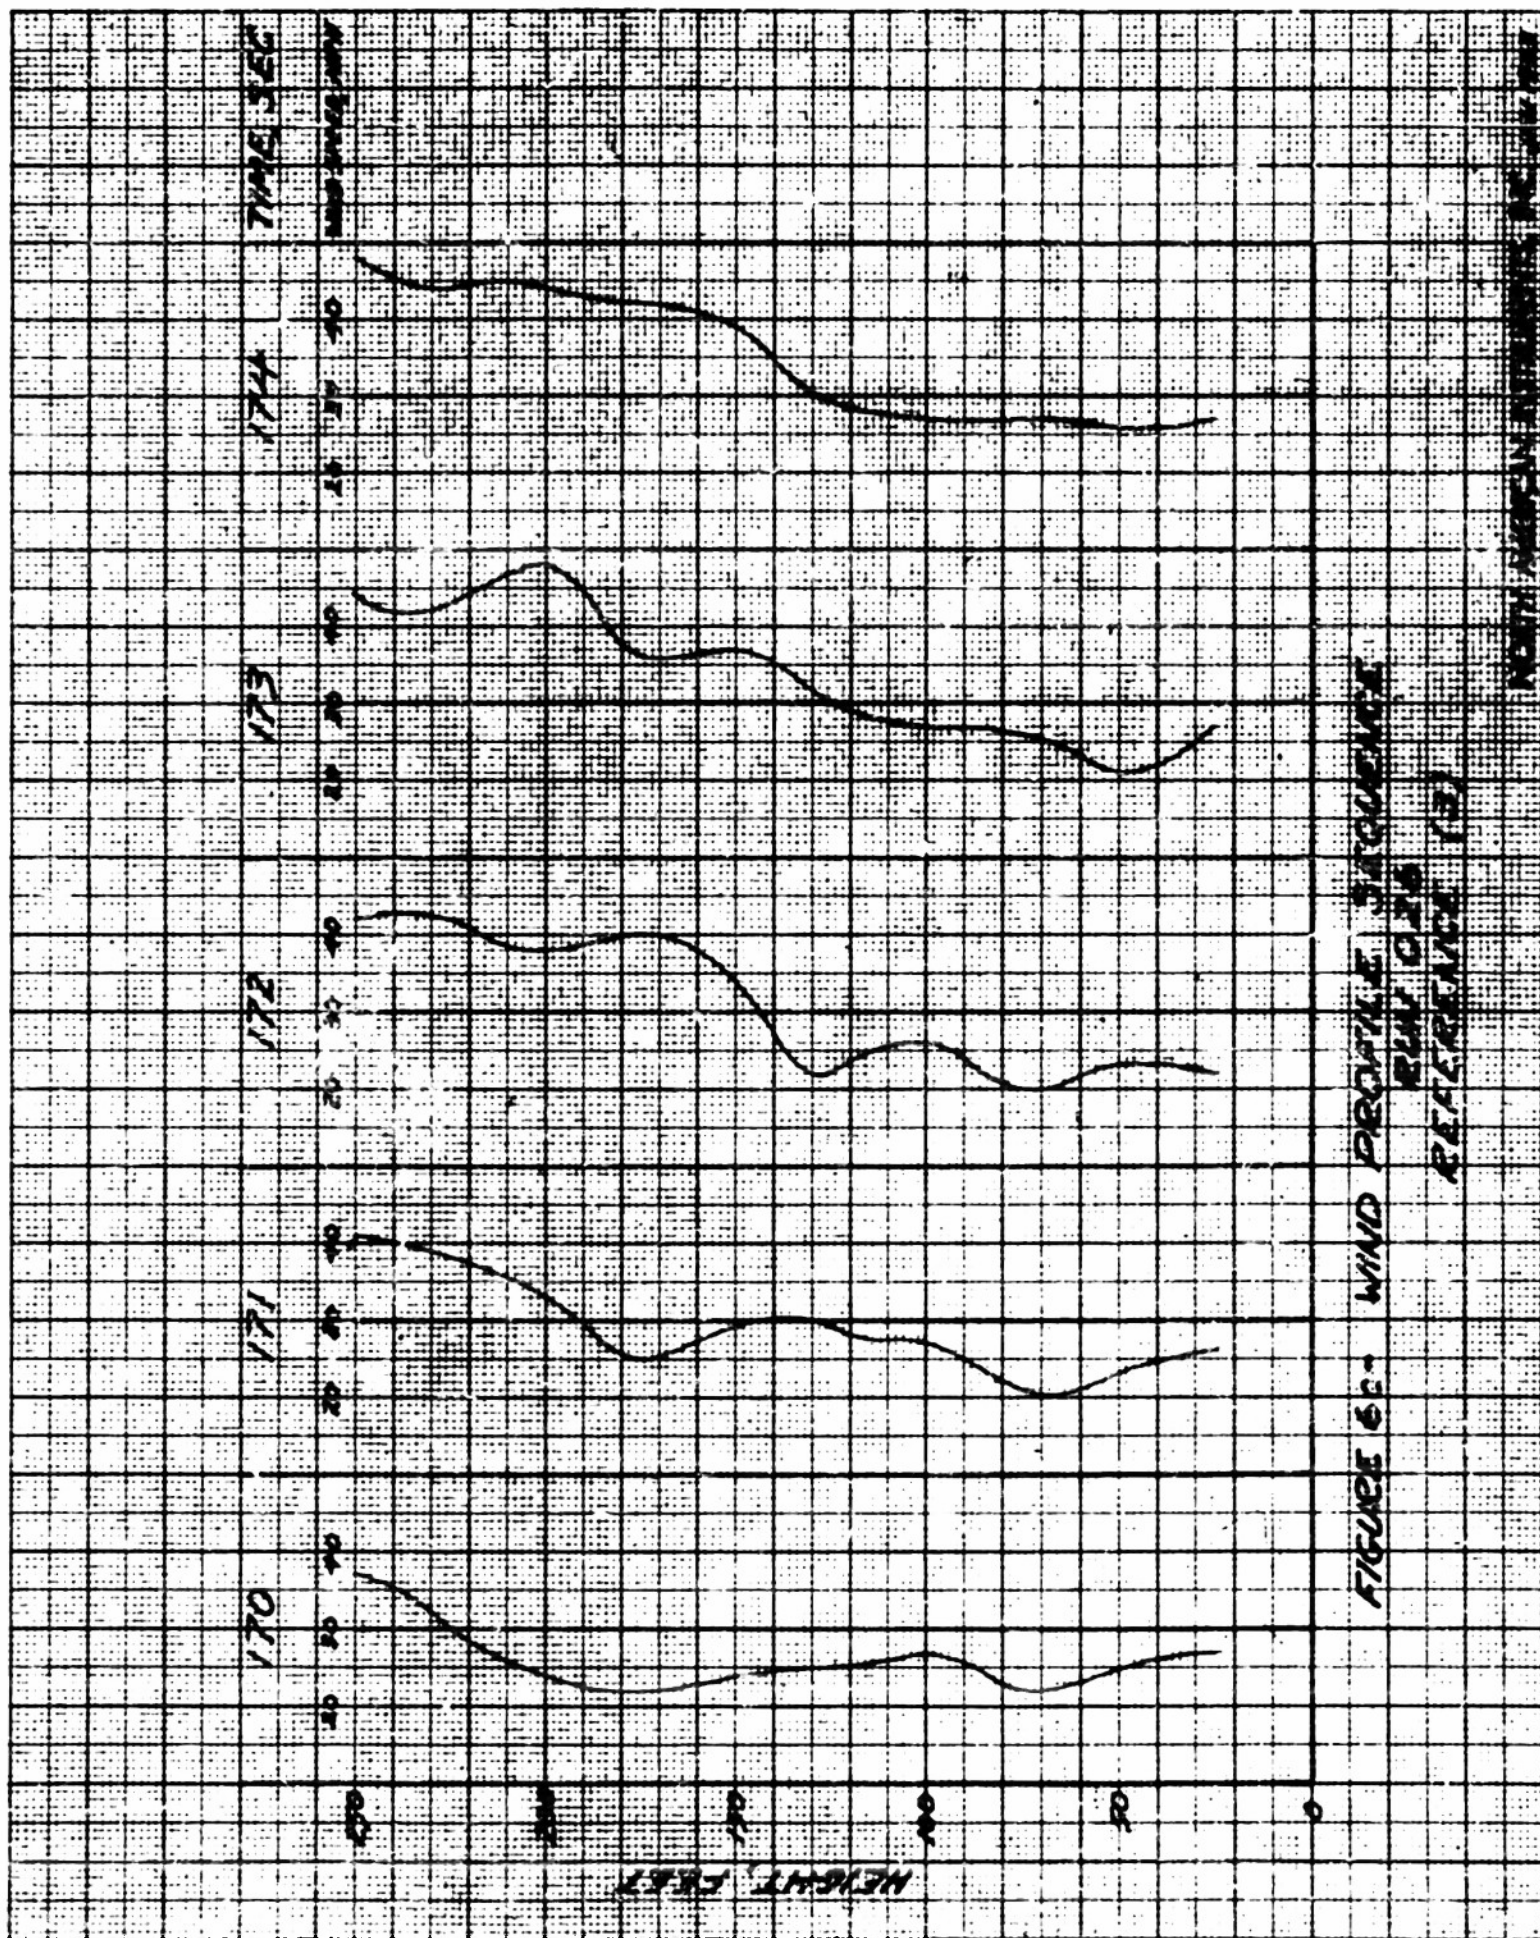


FIGURE 62- WIND PROFILE SEQUENCE  
RUN 026  
REFERENCE (3)

NORTH AMERICAN AIRWAYS, INC. 17-1000

CONFIDENTIAL  
SECURITY INFORMATION

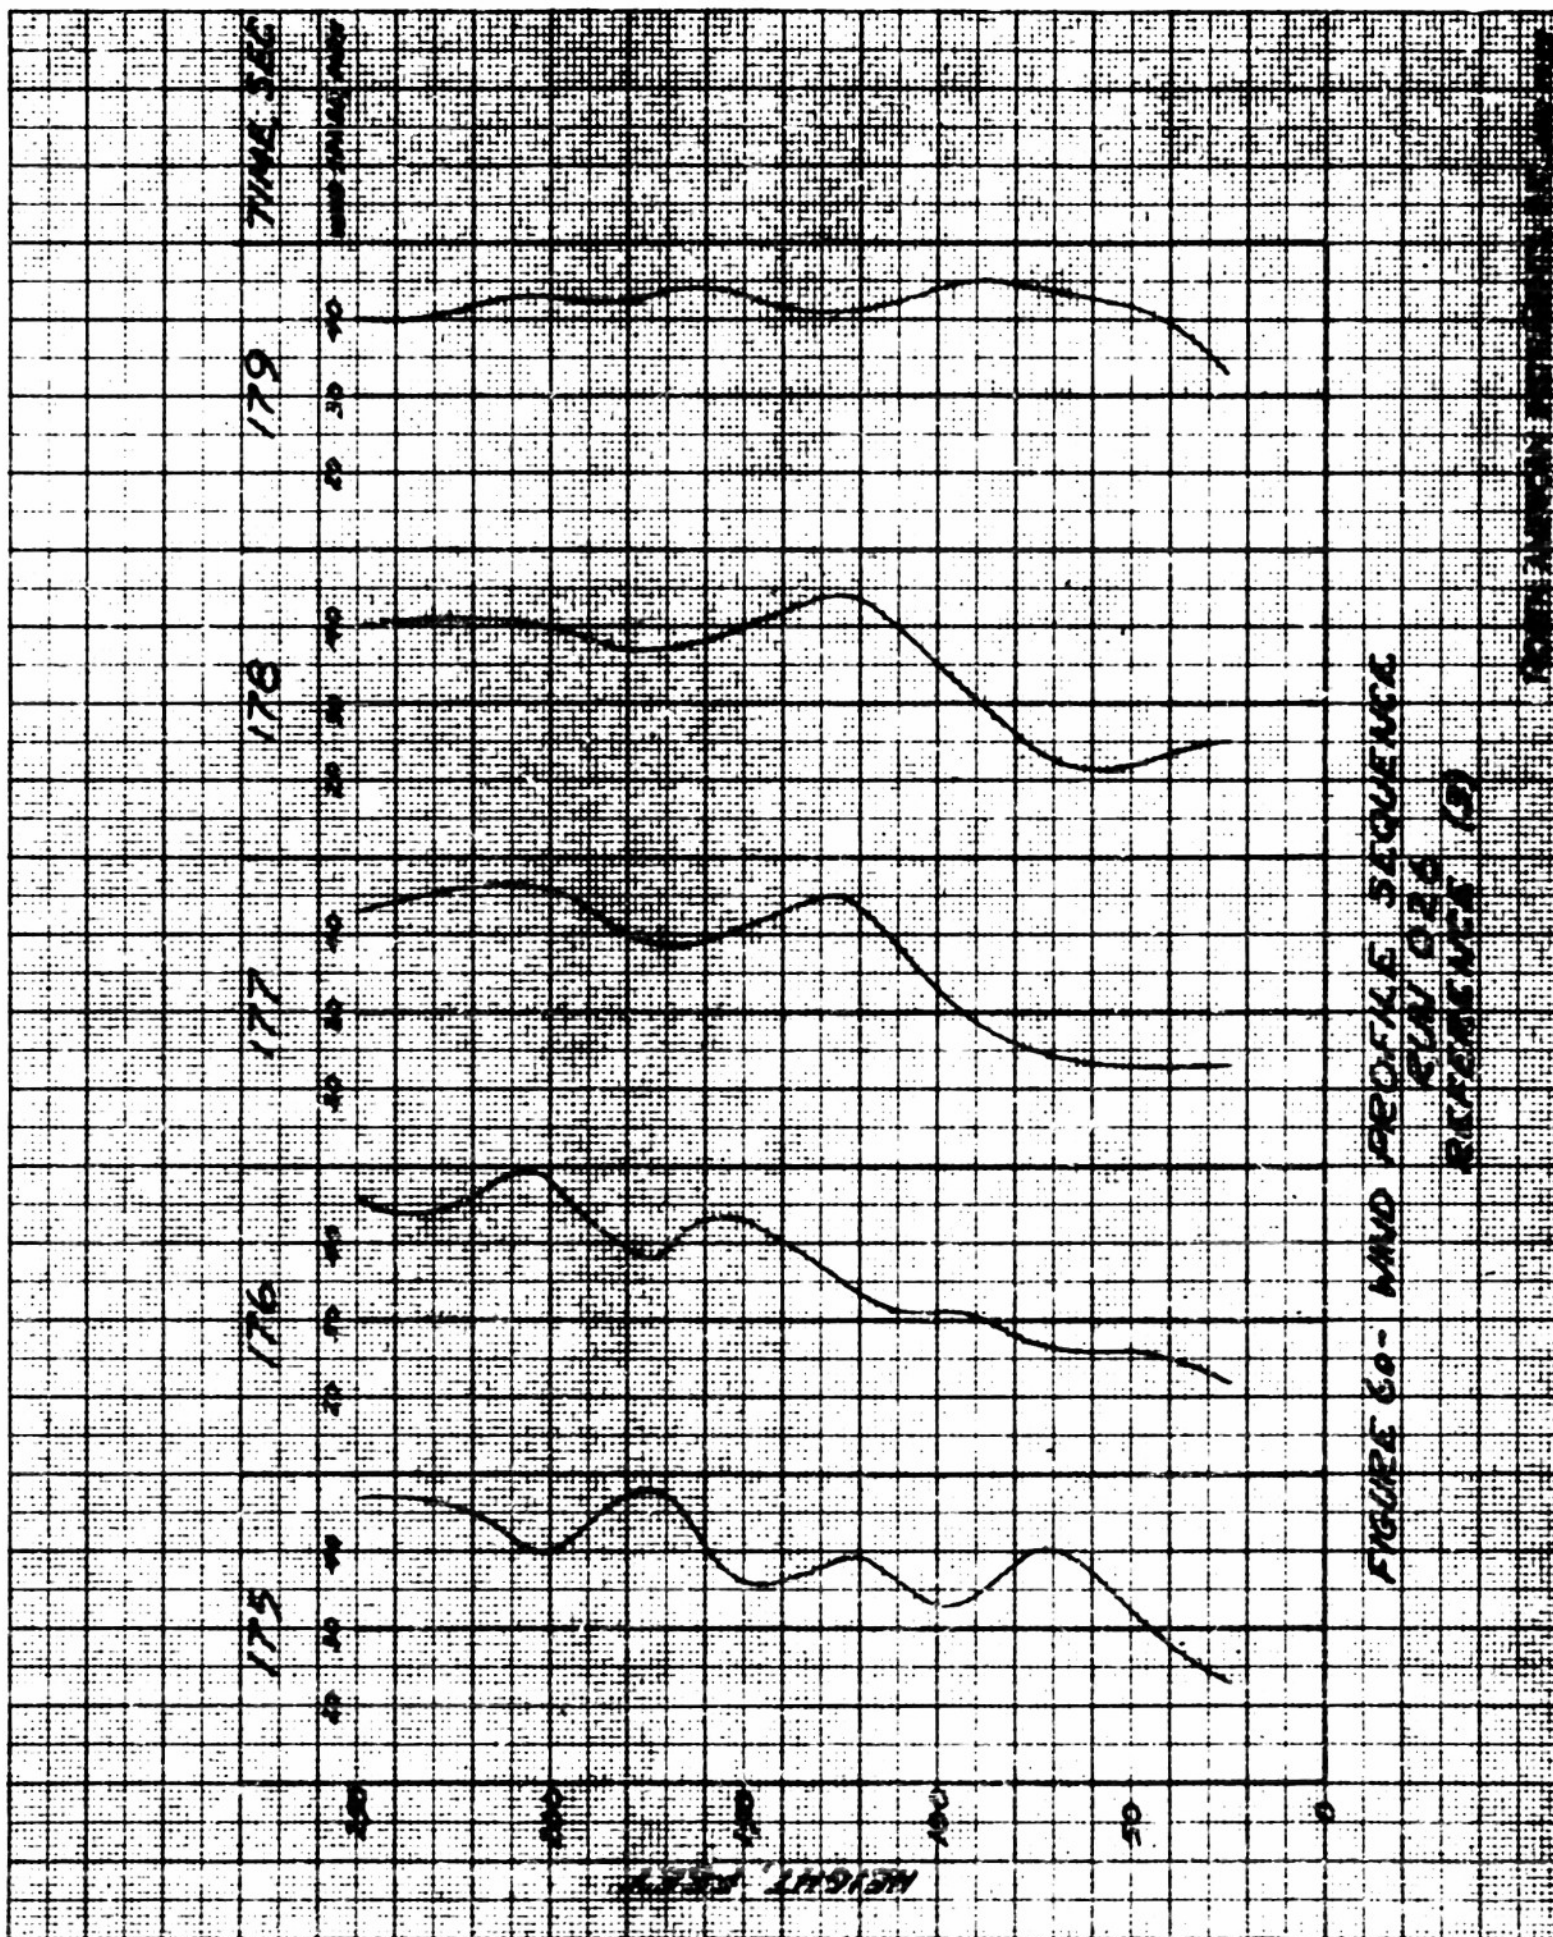


FIGURE 60- AND PROFILE SEQUENCES  
RUN 026  
REFERENCE (5)

SECURITY INFORMATION



CONFIDENTIAL  
SECURITY INFORMATION

163  
5413 of 6

TIME, SEC

184

183

182

181

180

PROFILE SEQUENCE

SEQUENCE (3)

SEQUENCE (3)

CONFIDENTIAL  
SECURITY INFORMATION

HEIGHT, FEET

CONFIDENTIAL  
SECURITY INFORMATION

930 945  
E91  
163

TIME, SEC

WIND PROFILE

185

20 20 40

400

400

400

400

400

400

HEIGHT, FEET

CONFIDENTIAL  
SECURITY INFORMATION


FIGURE 61- WIND PROFILE SEQUENCE  
EVAL 026  
REFERENCE (3)

NOVA AIRCRAFT



654  
2700

CONFIDENTIAL  
SECURITY INFORMATION

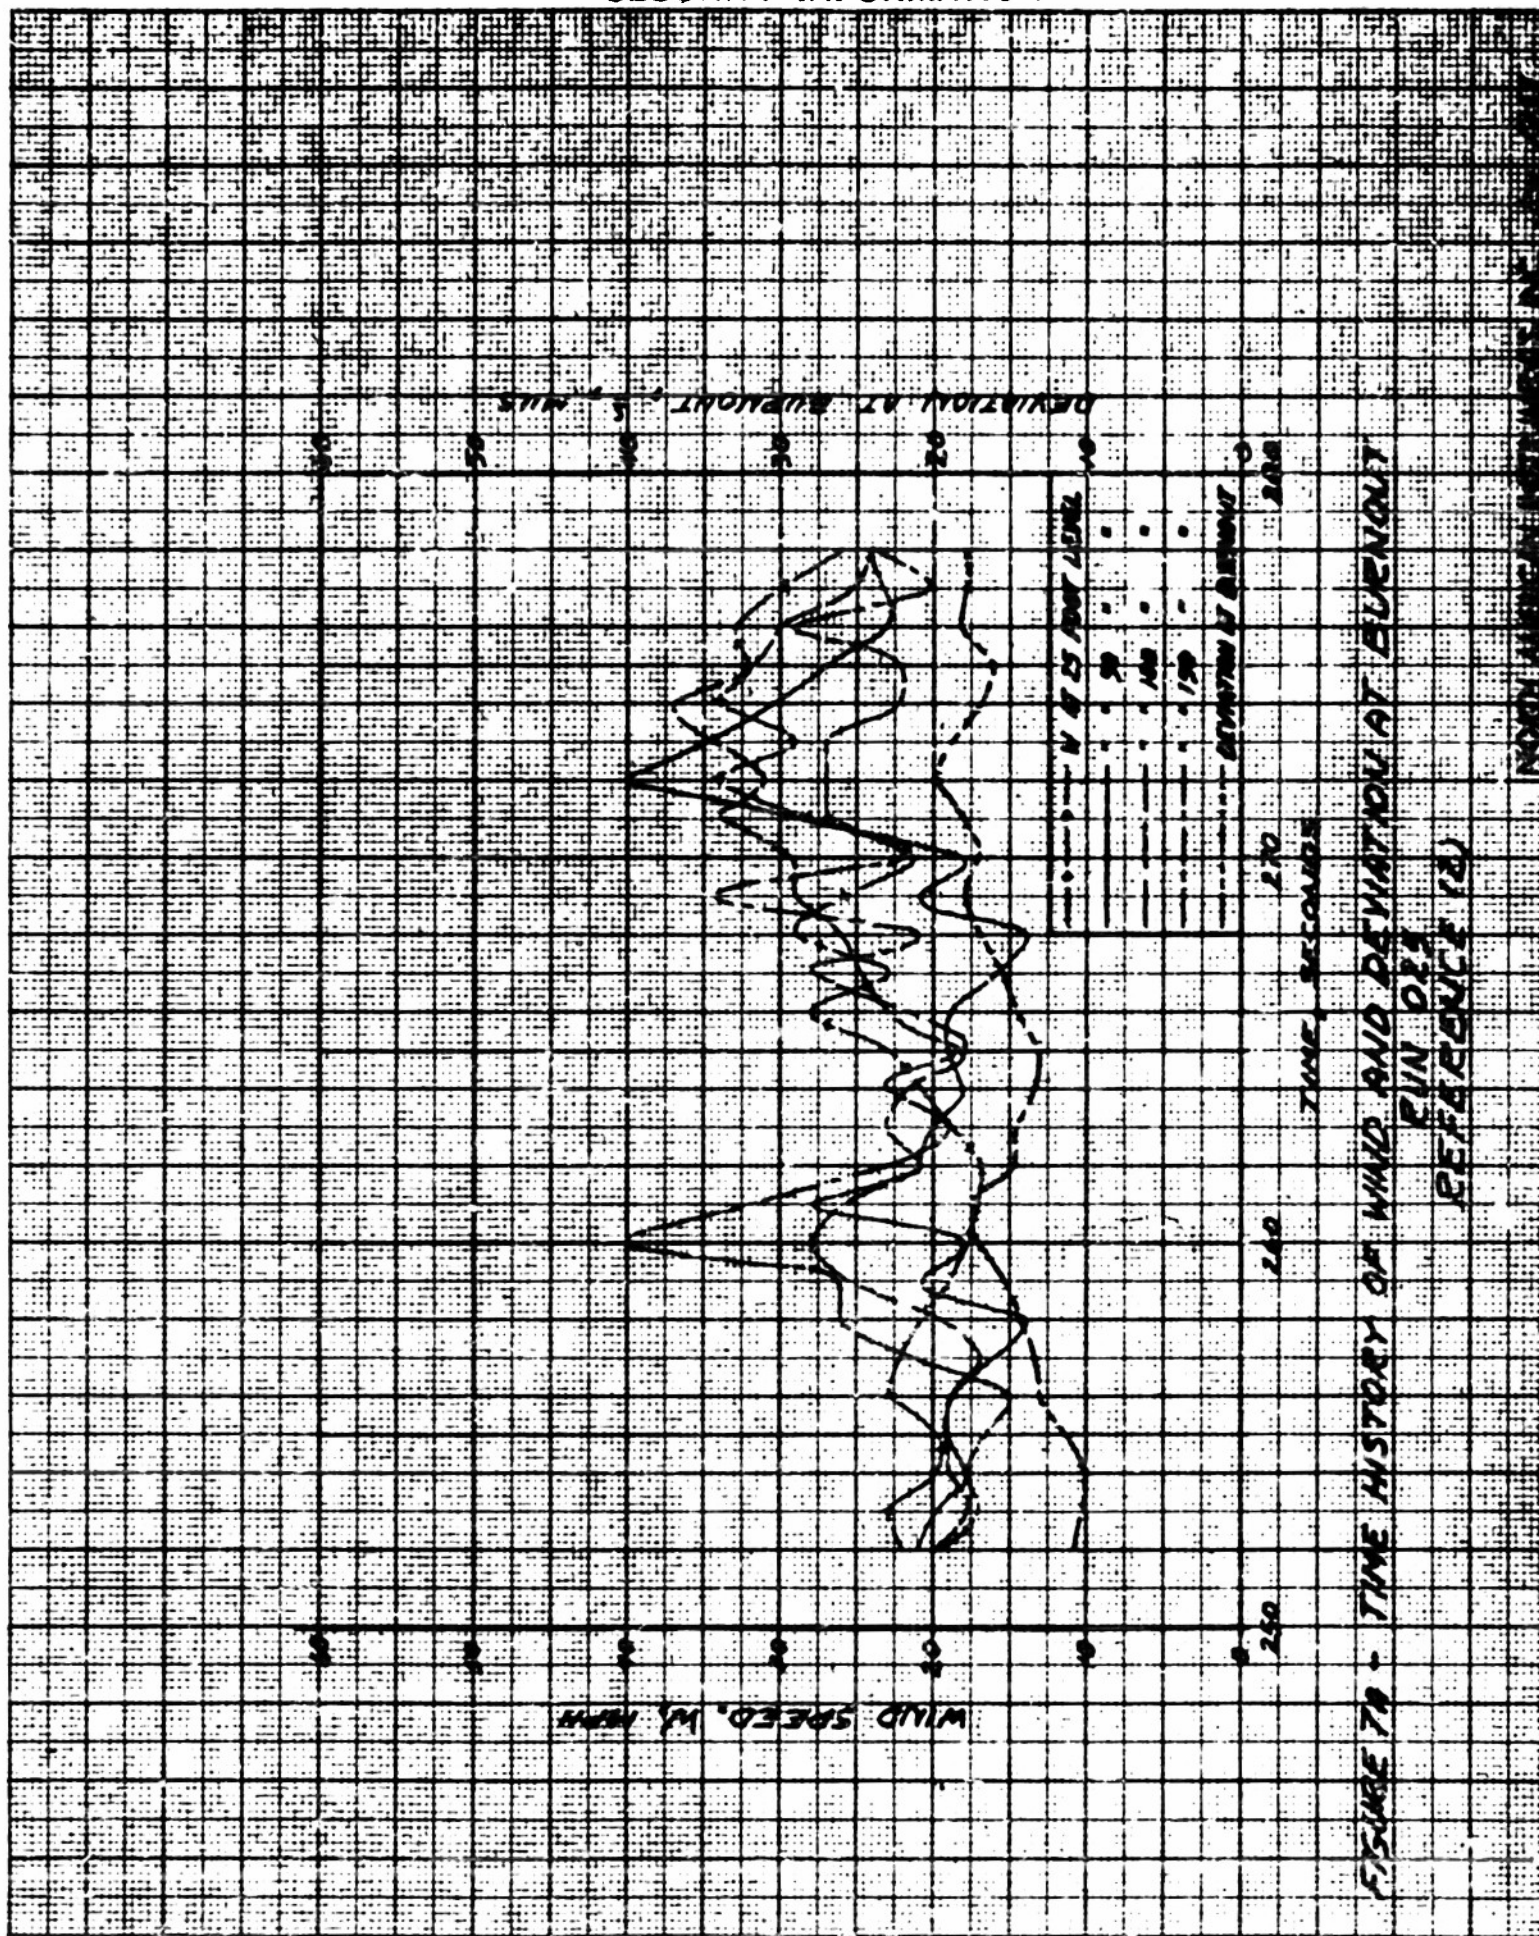

CONFIDENTIAL



104  
3472000

CONFIDENTIAL  
SECURITY INFORMATION



FIGURE 7B - TIME HISTORY OF SMOOTHED (4 SECOND AVERAGE) WIND  
AND DEVIATION AT BURKHOUT  
RUN 015  
REFERENCE (2)

NOTES: 1. BURKHOUT IS A 15 KNOT WIND SPEED

CONFIDENTIAL  
SECURITY INFORMATION


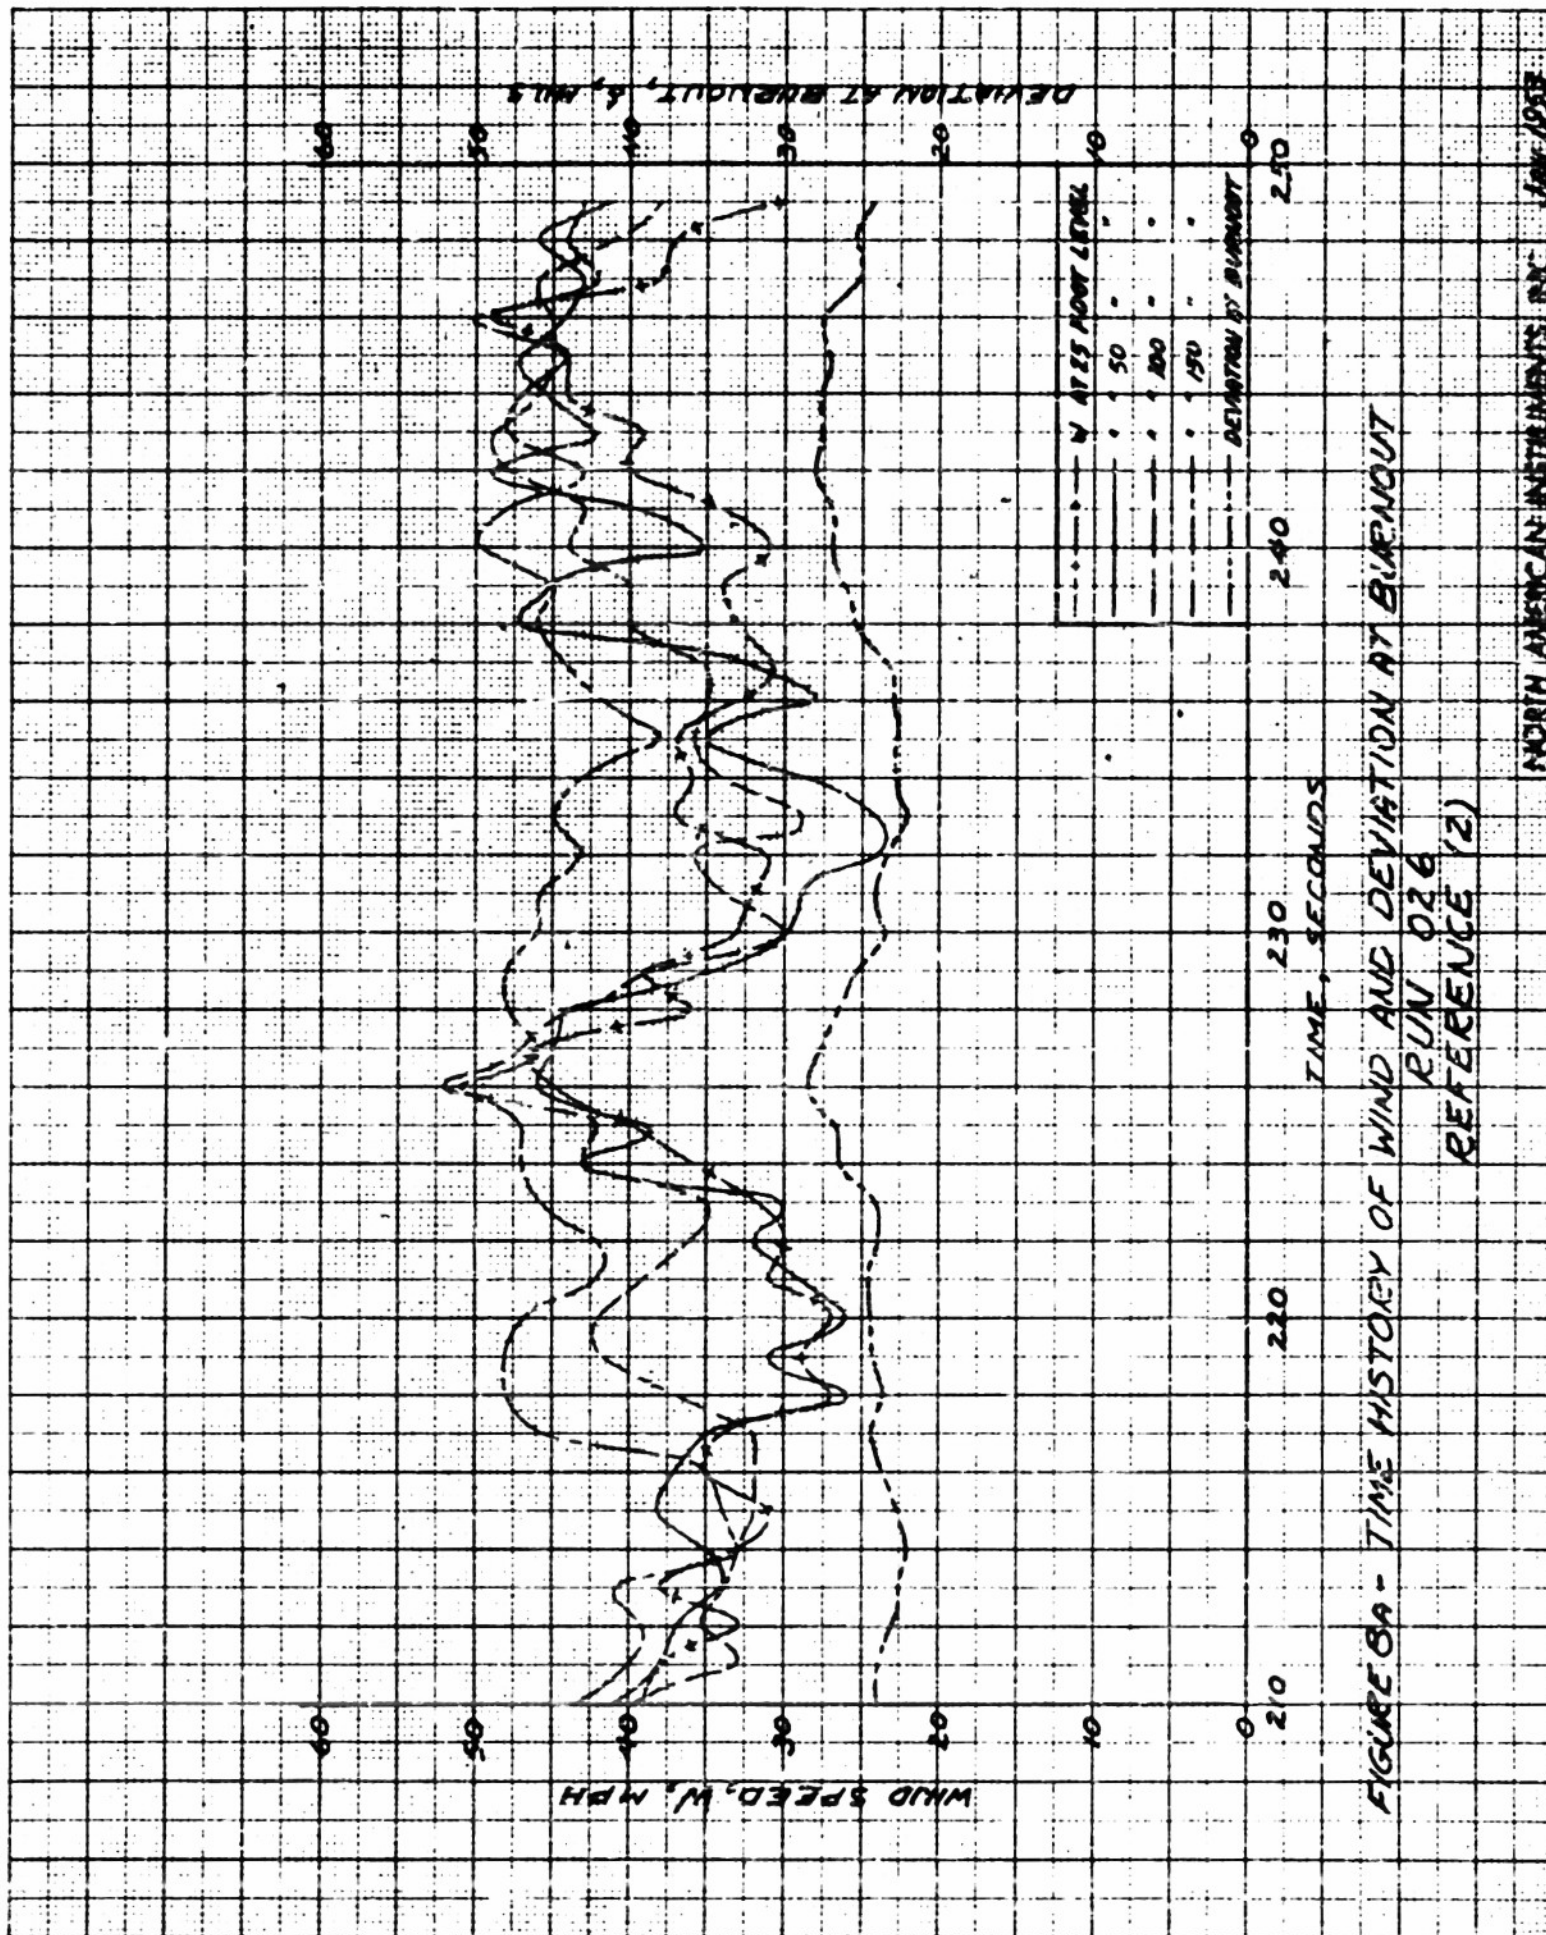


FIGURE 6A - TIME HISTORY OF WIND AND DEVIATION AT BIARRITZ  
RUN 026  
REFERENCE (2)



CONFIDENTIAL  
SECURITY INFORMATION

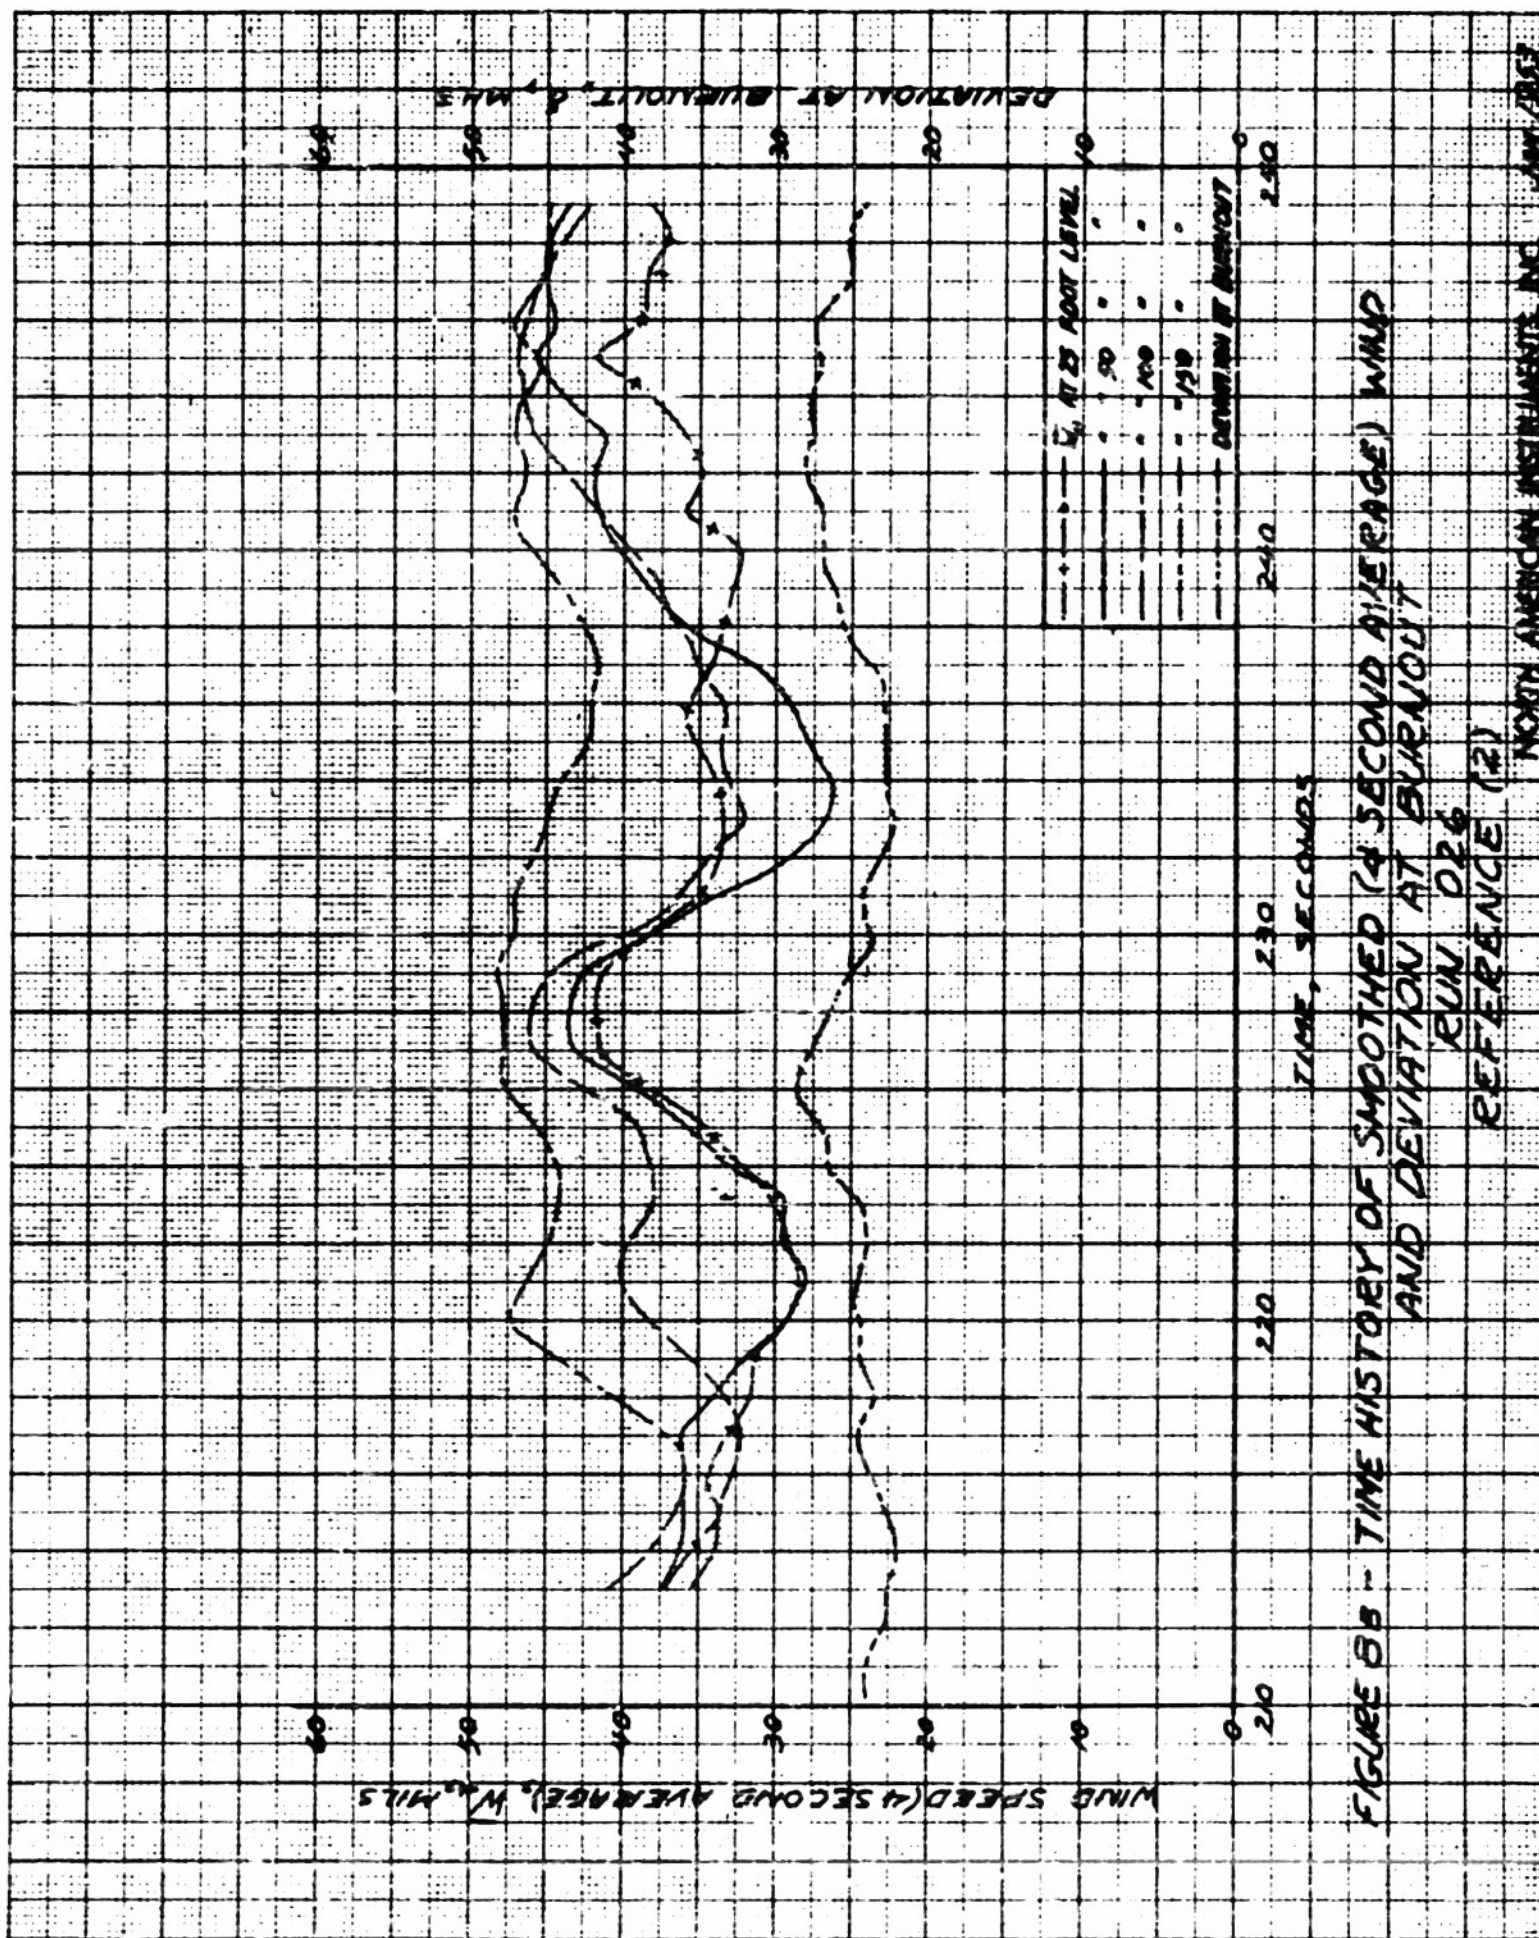

CONFIDENTIAL

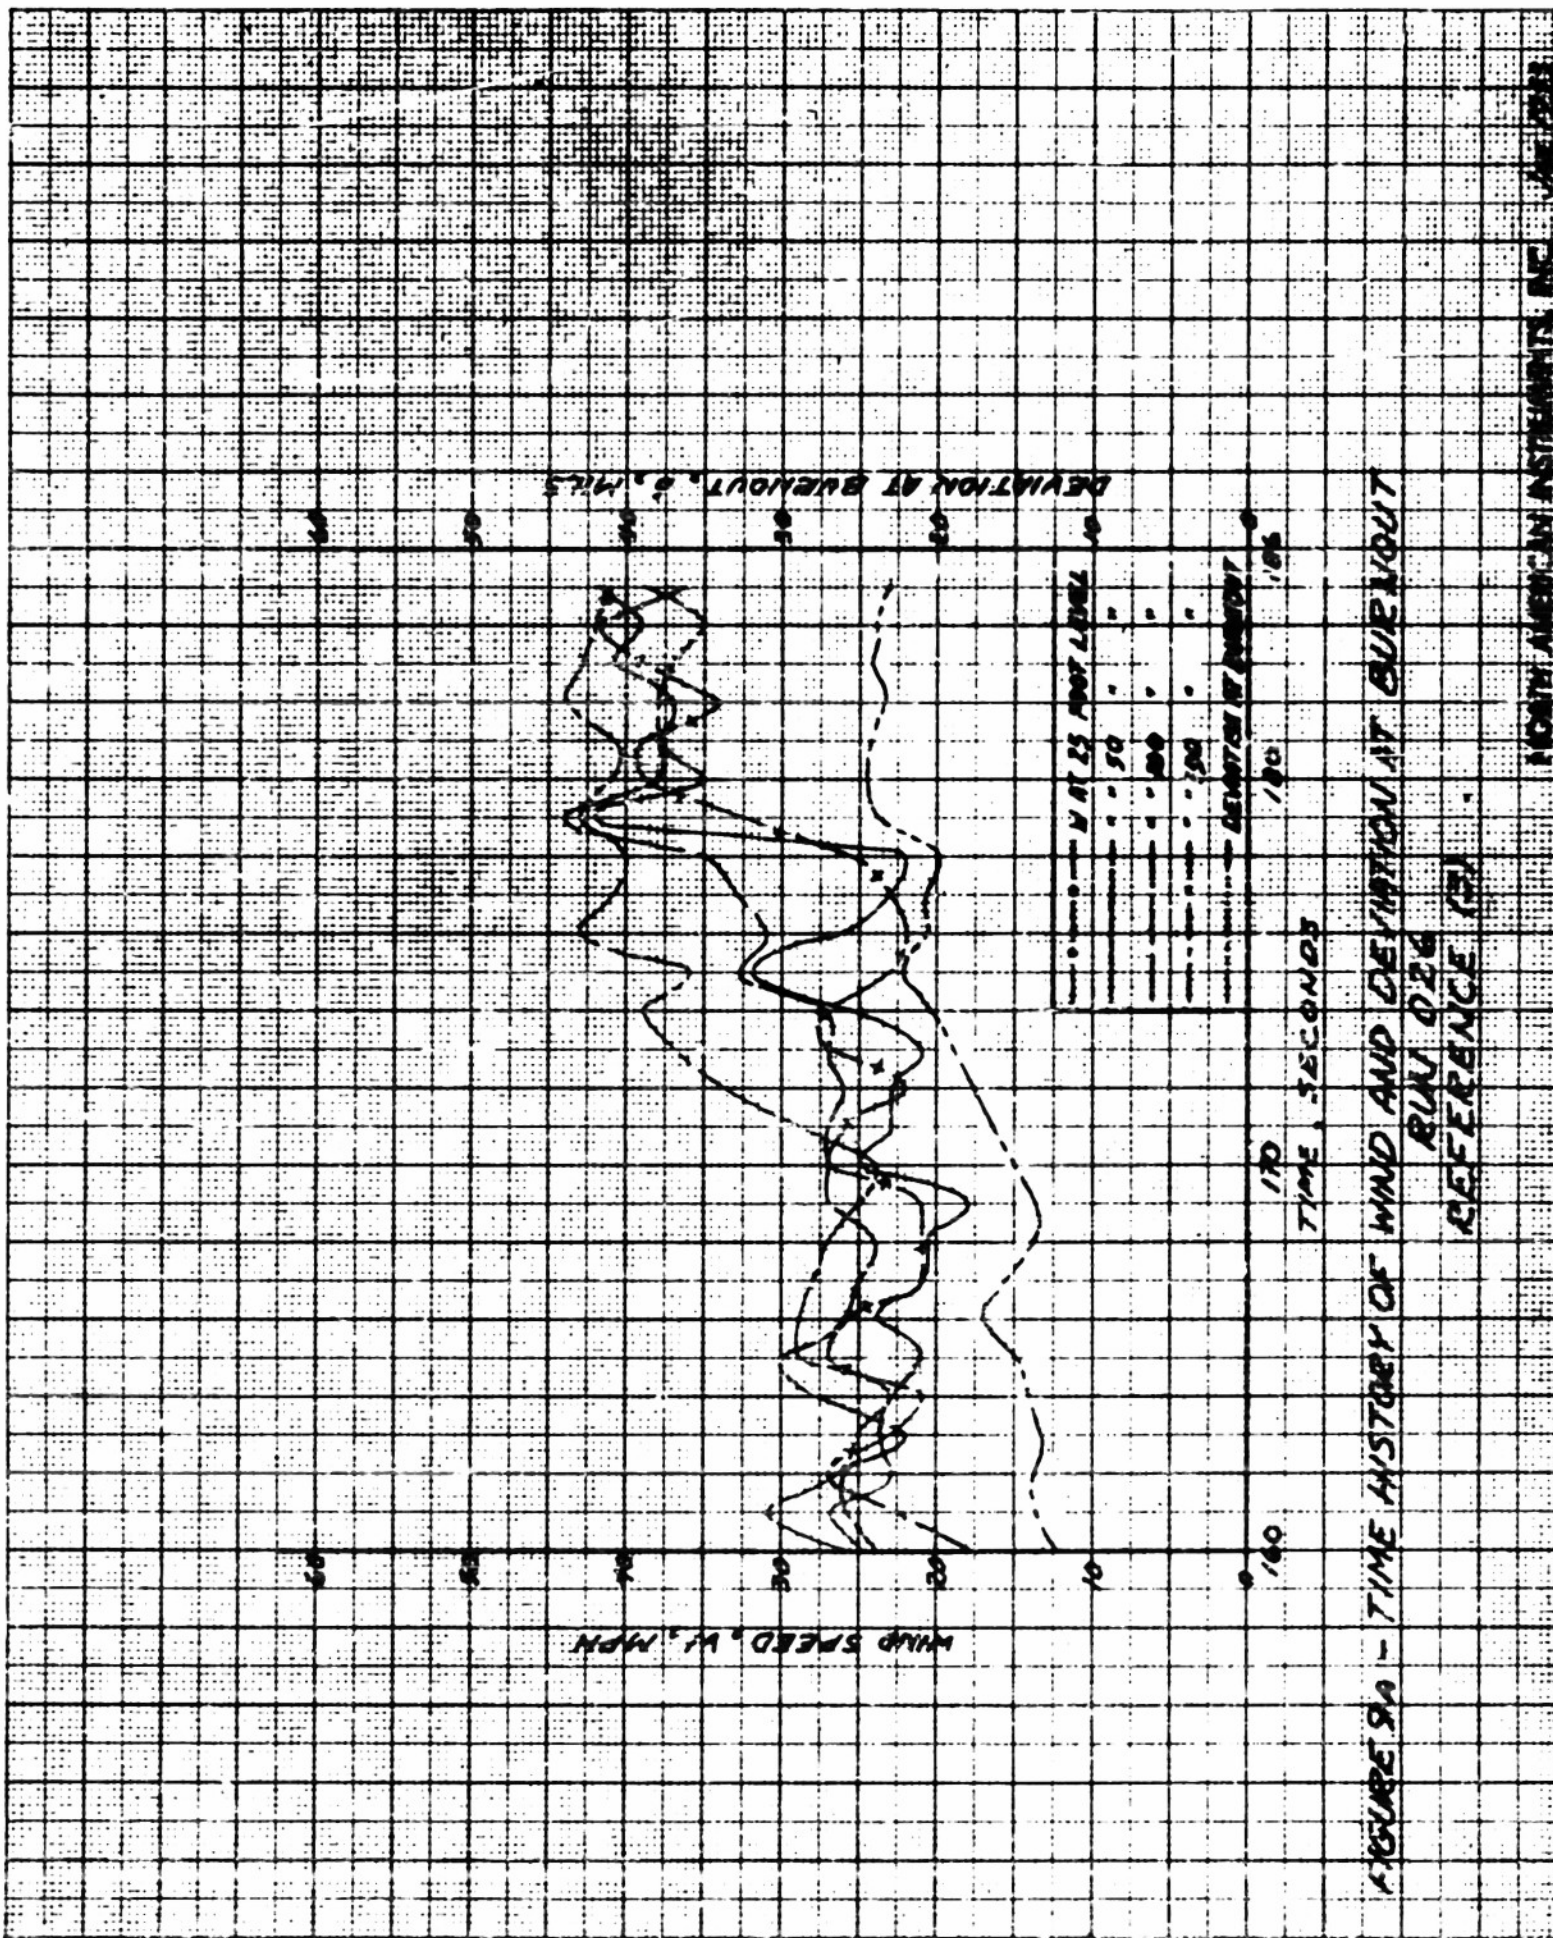


FIGURE 9A - TIME HISTORY OF WIND AND DEVIATION AT BUREAU  
RUN 026  
REFERENCE (3)



CONFIDENTIAL  
SECURITY INFORMATION

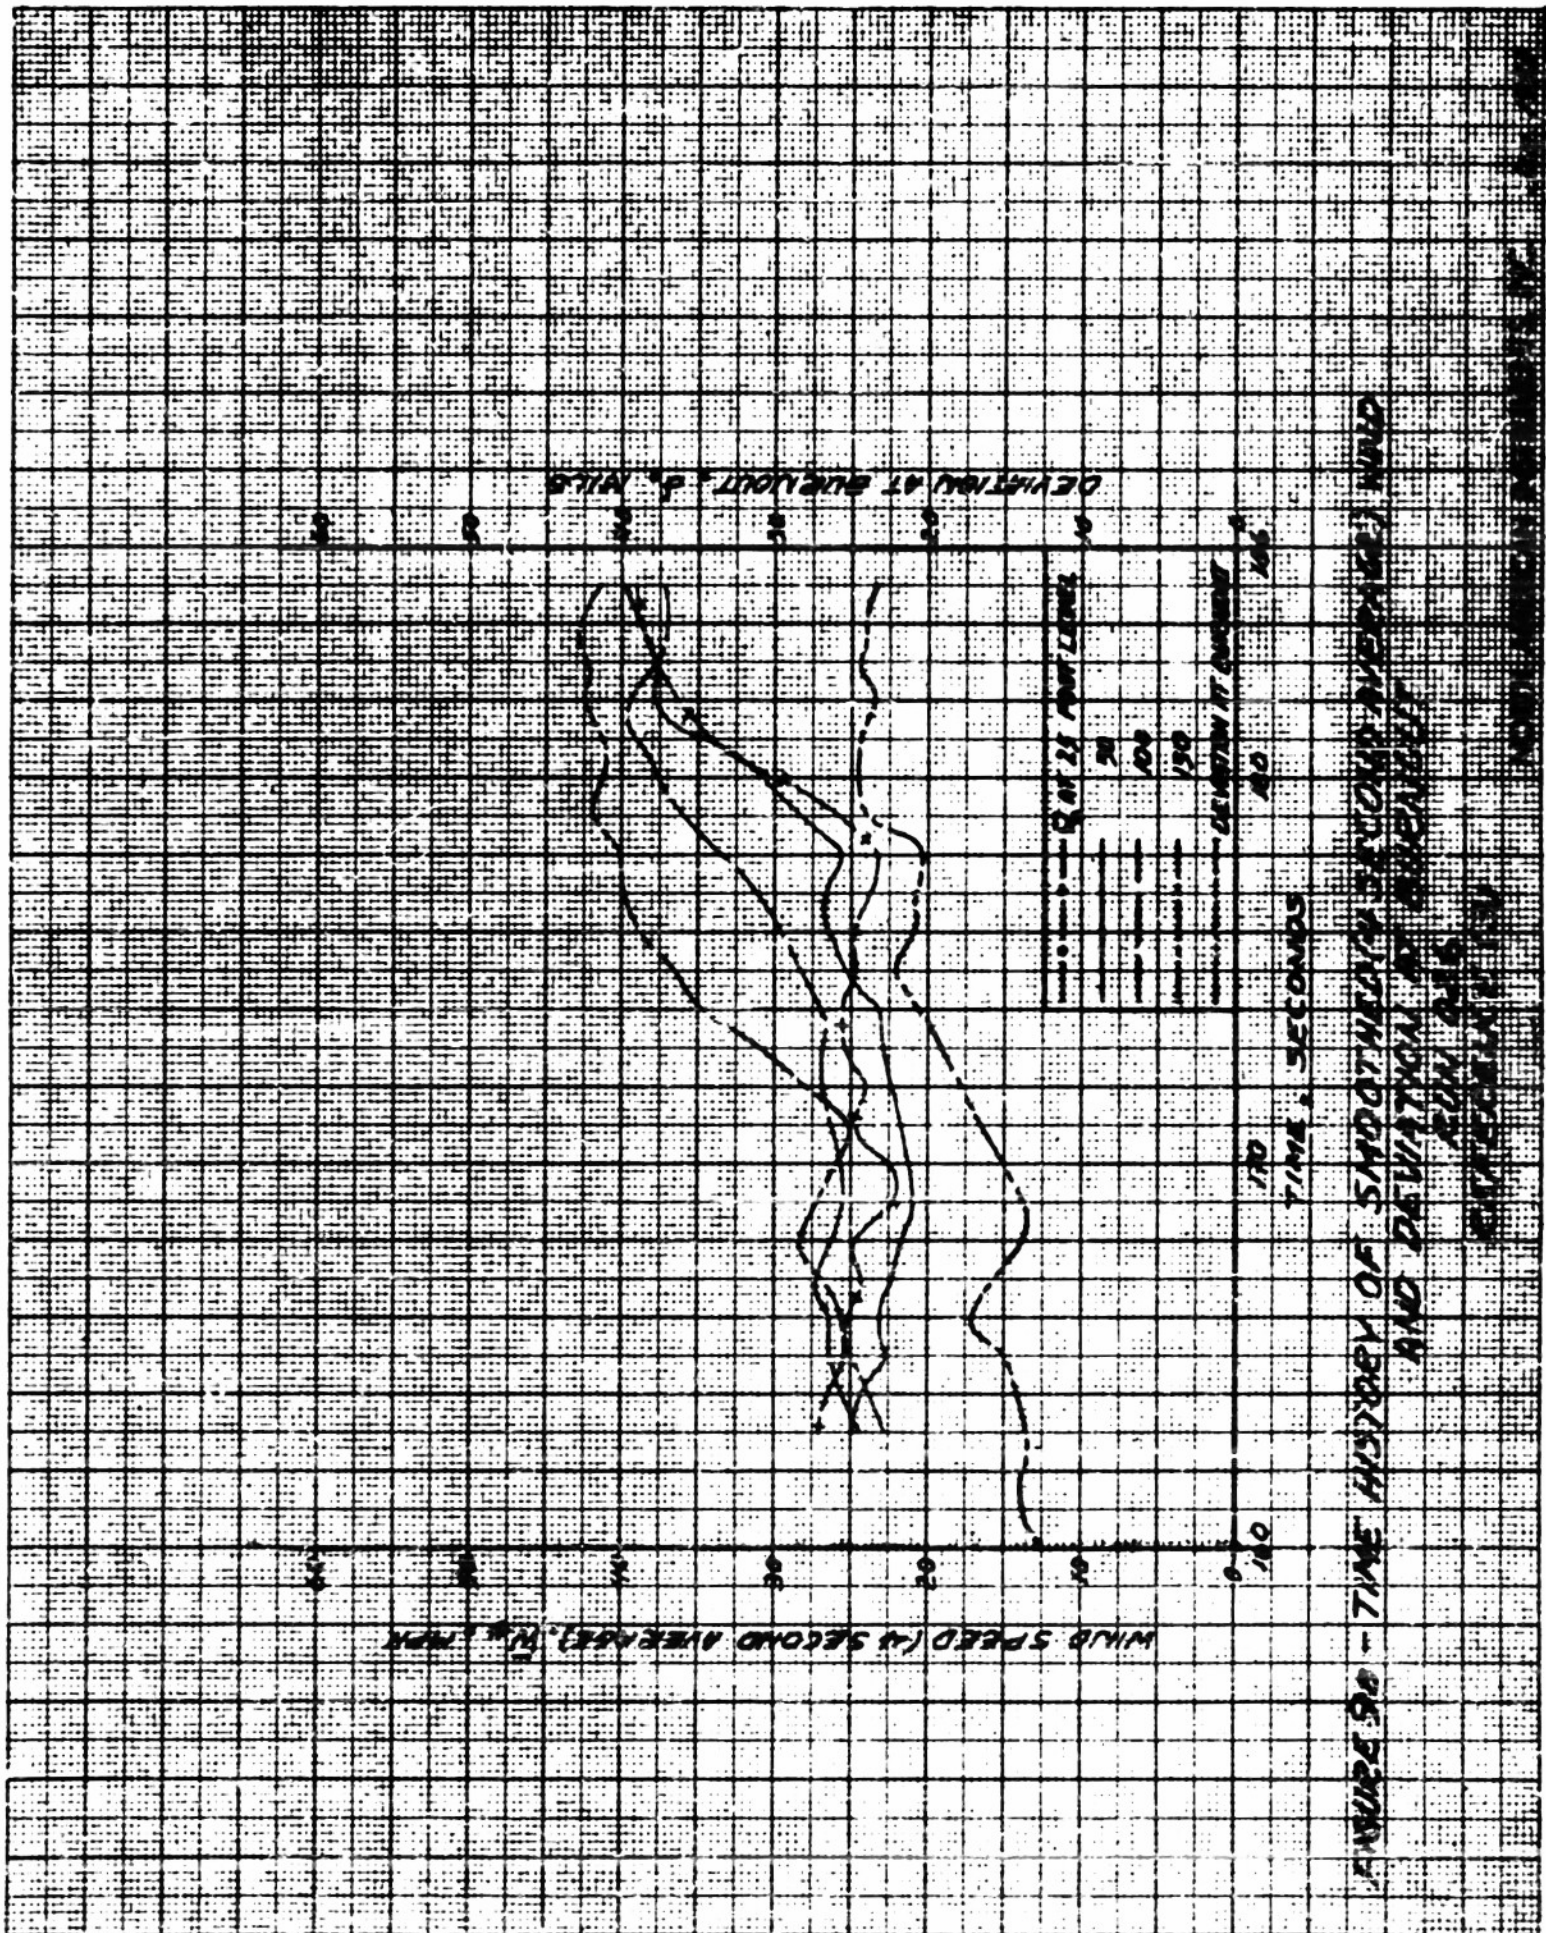


FIGURE 90 - TIME HISTORY OF SMOOTHED (4 SECOND AVERAGE) WIND  
AND DEVIATION AT ALTITUDE  
RUN 016  
RESEARCHER'S COPY

CONFIDENTIAL

167  
016-12



CONFIDENTIAL  
SECURITY INFORMATION

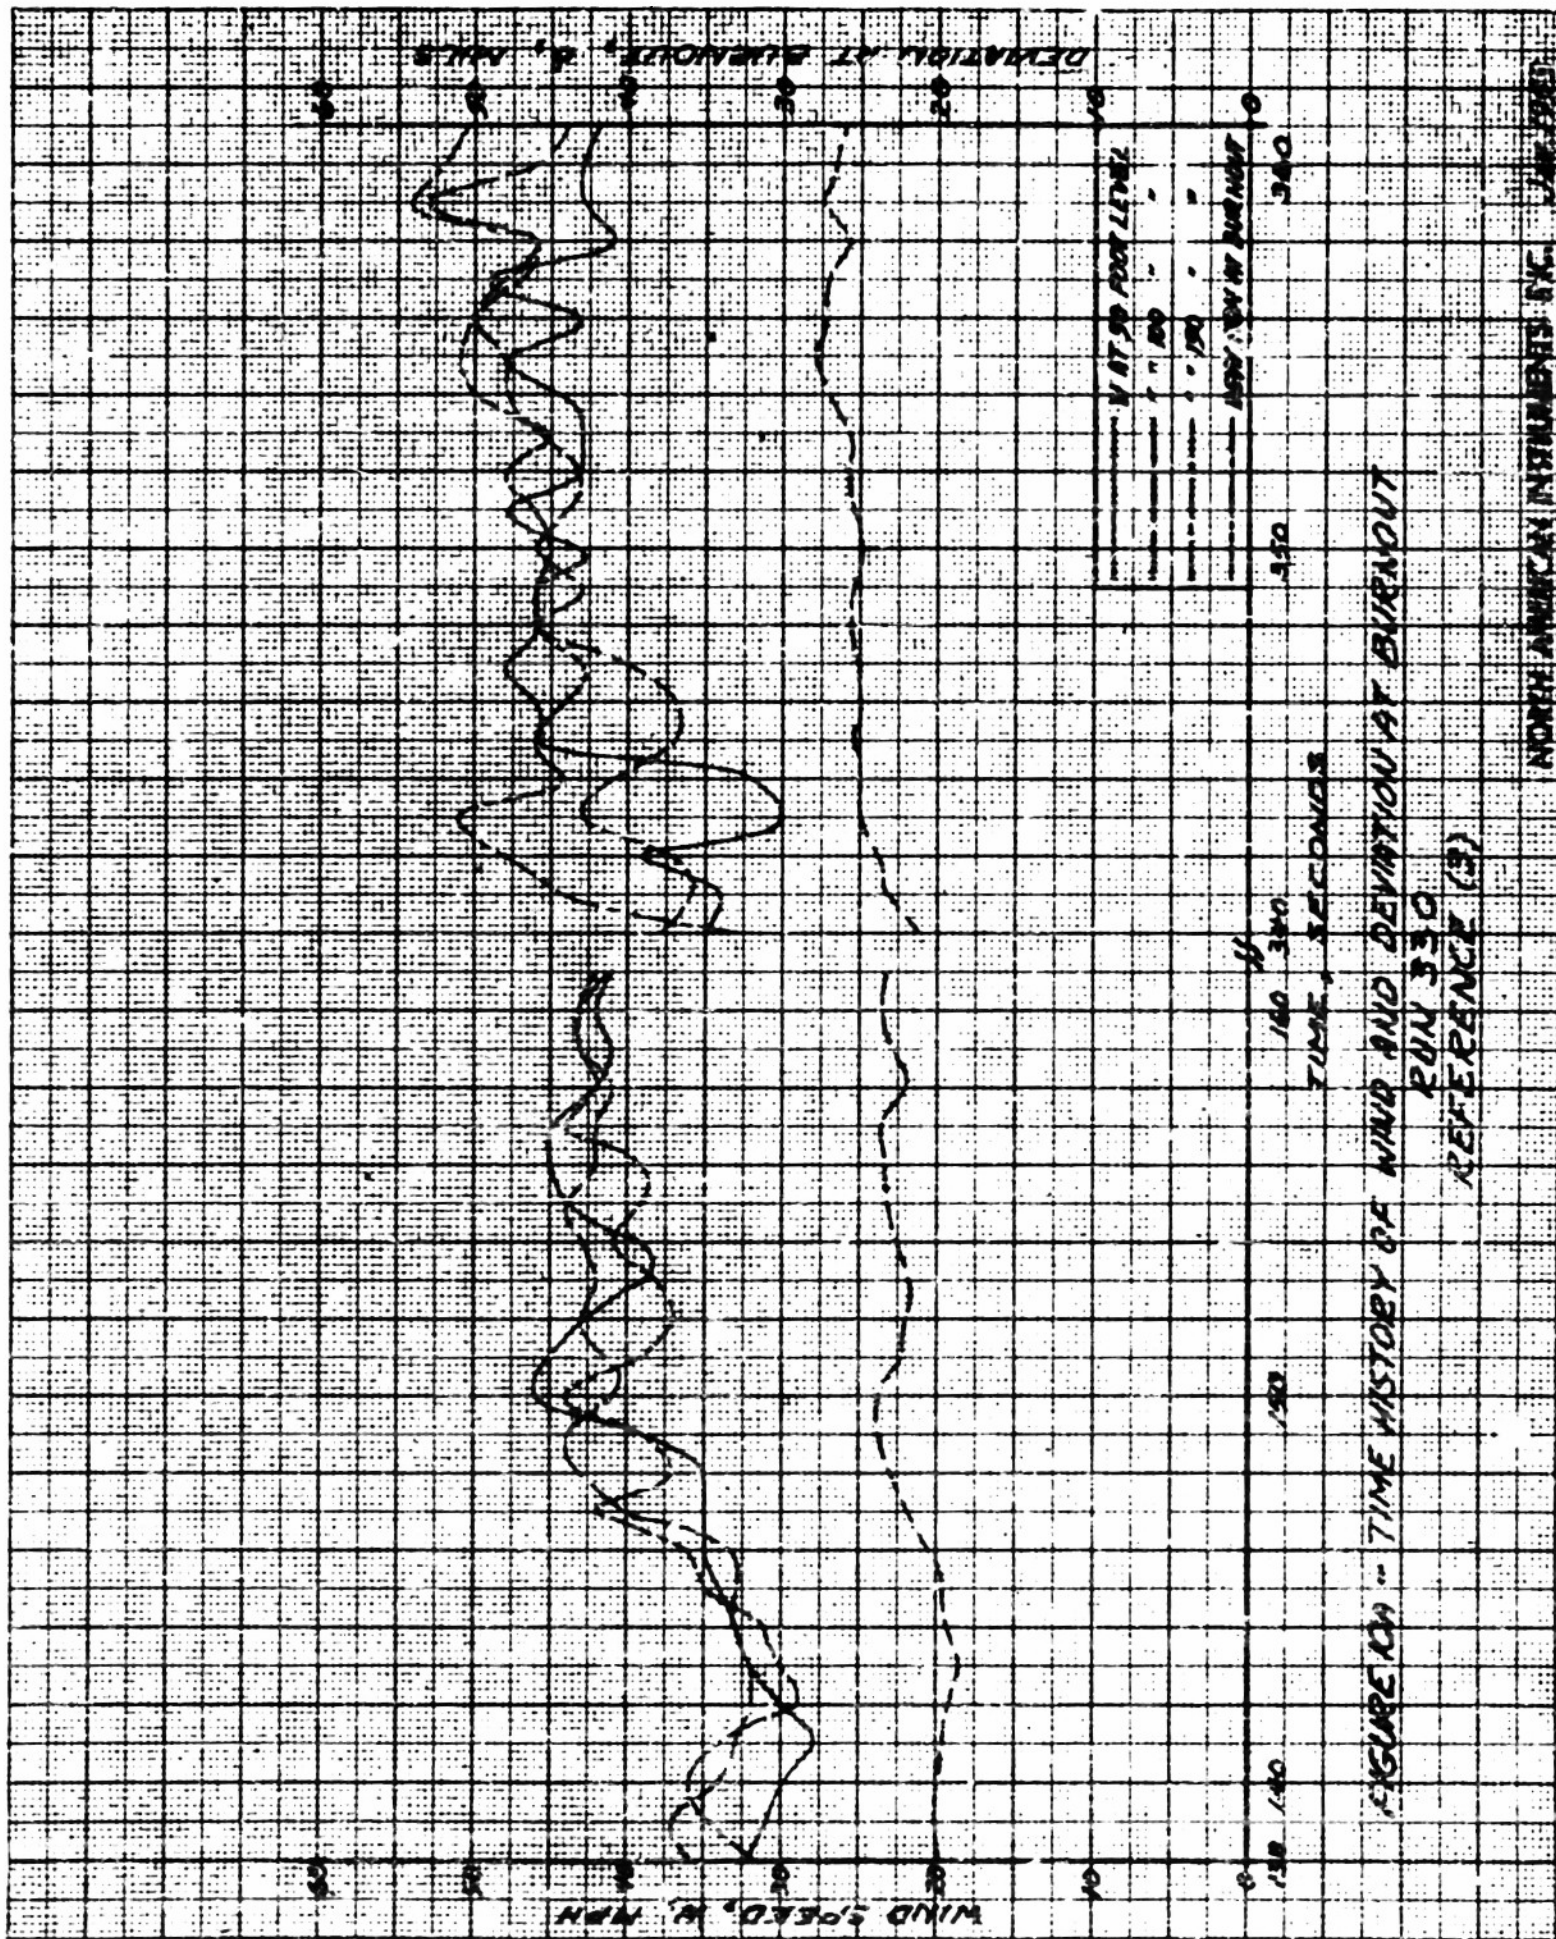


FIGURE 10 - TIME HISTORY OF WIND AND DEVIATION AT BURNDOUT  
RUN 350  
REFERENCE (3)

NORTH AMERICAN INSTRUMENTS, INC. JAN 1960

CONFIDENTIAL


SECURITY INFORMATION

164  
2417.018



164  
340-2-12

CONFIDENTIAL  
SECURITY INFORMATION

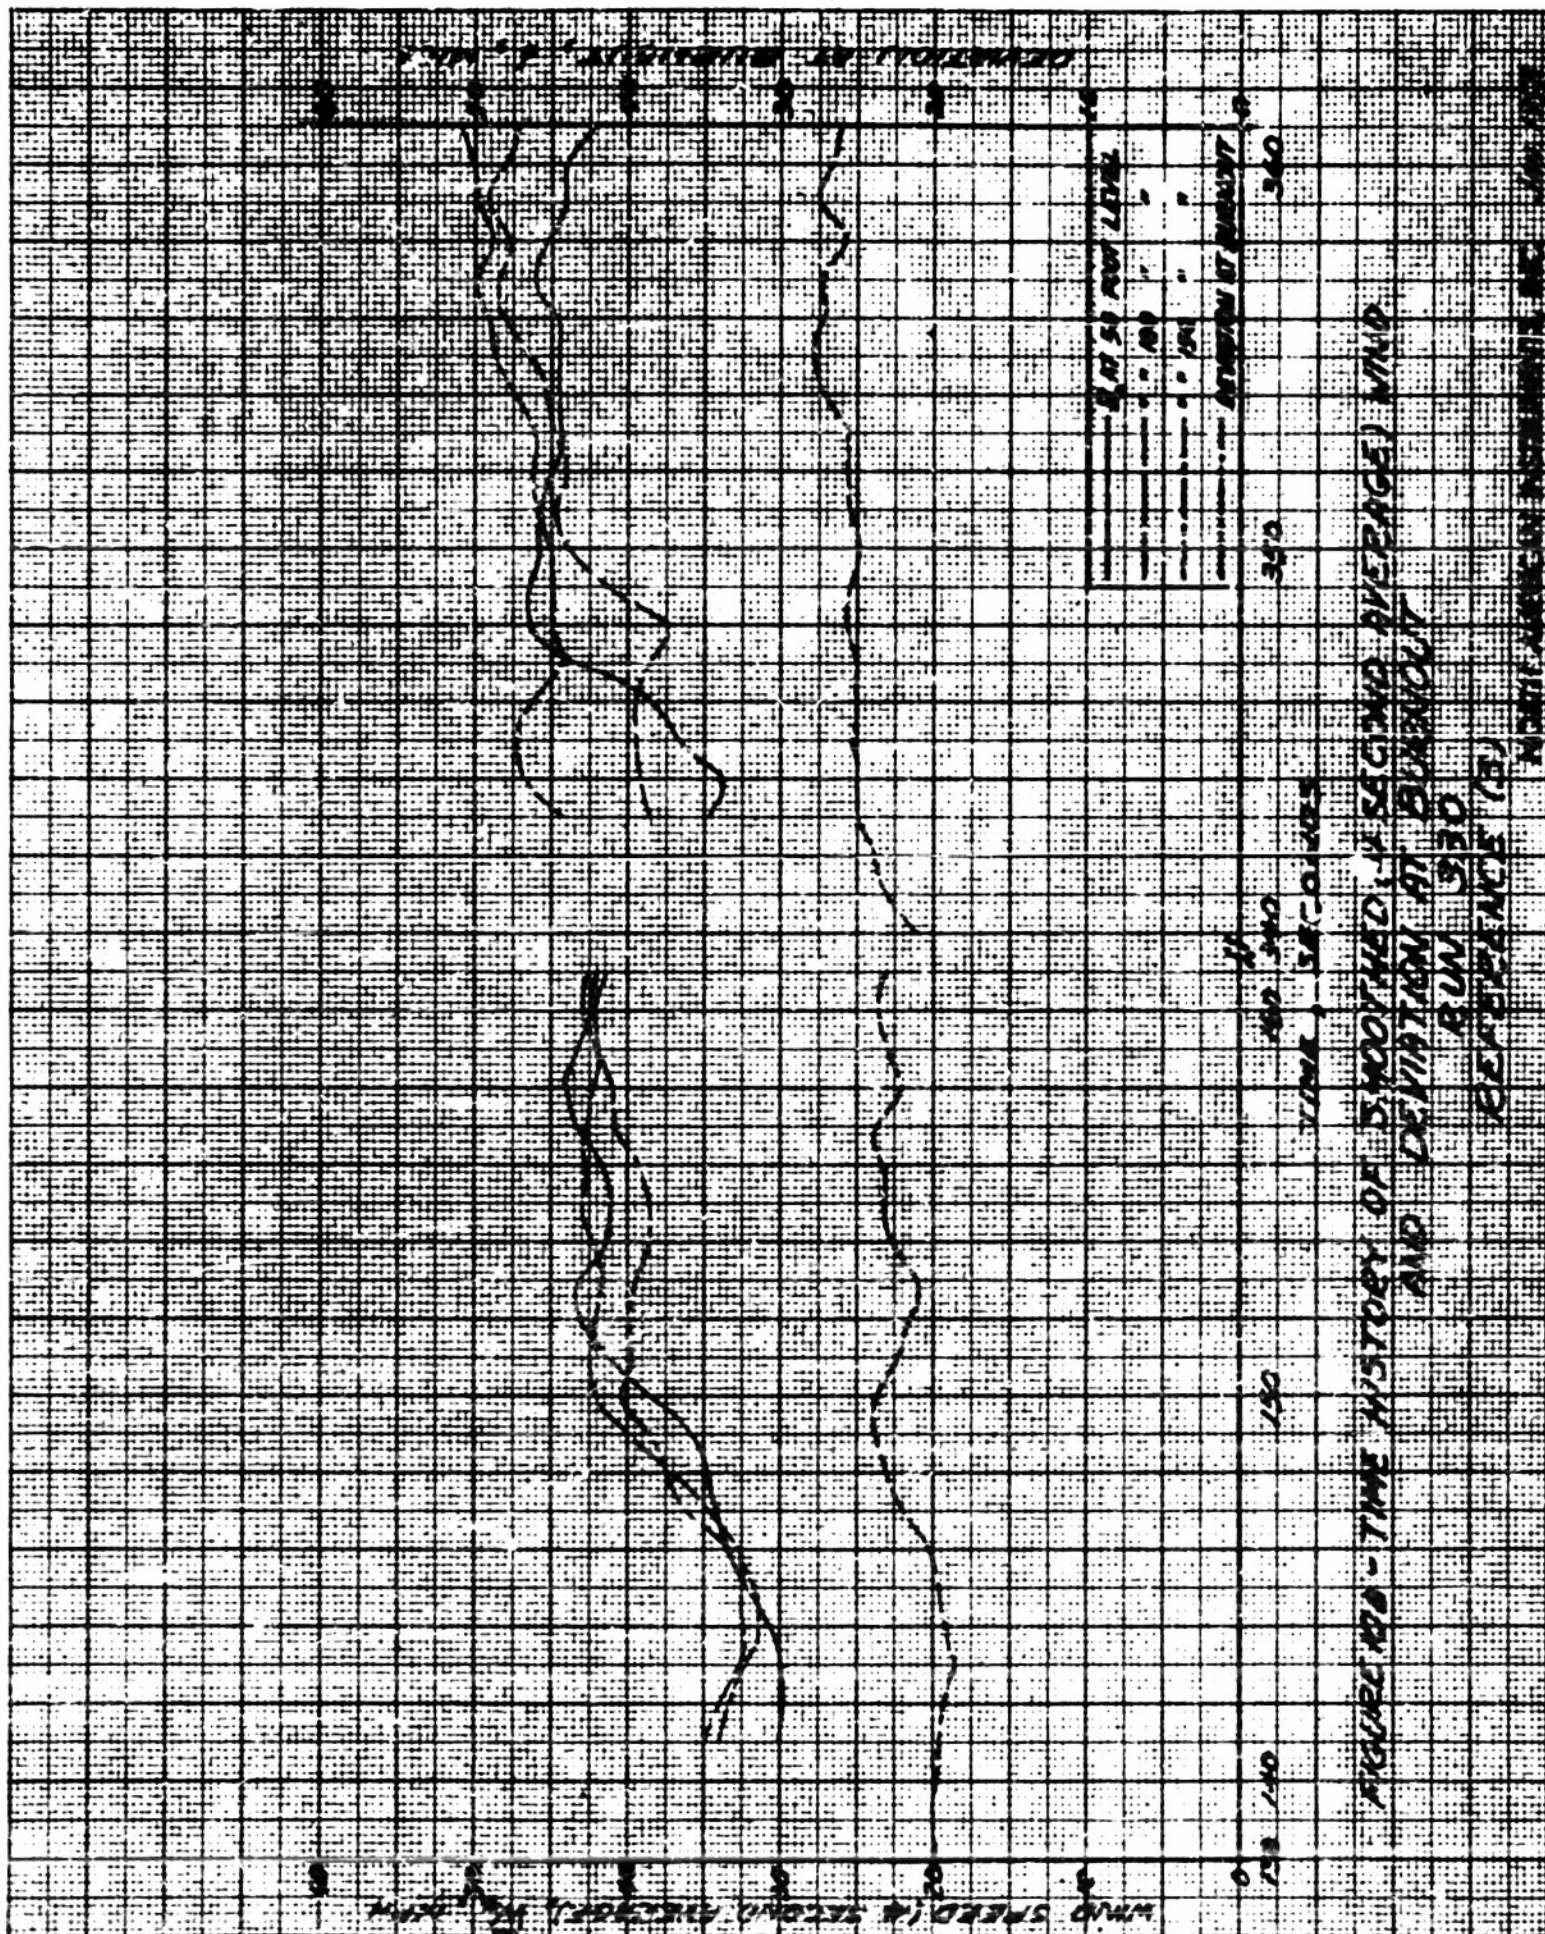

CONFIDENTIAL



# SECURITY INFORMATION

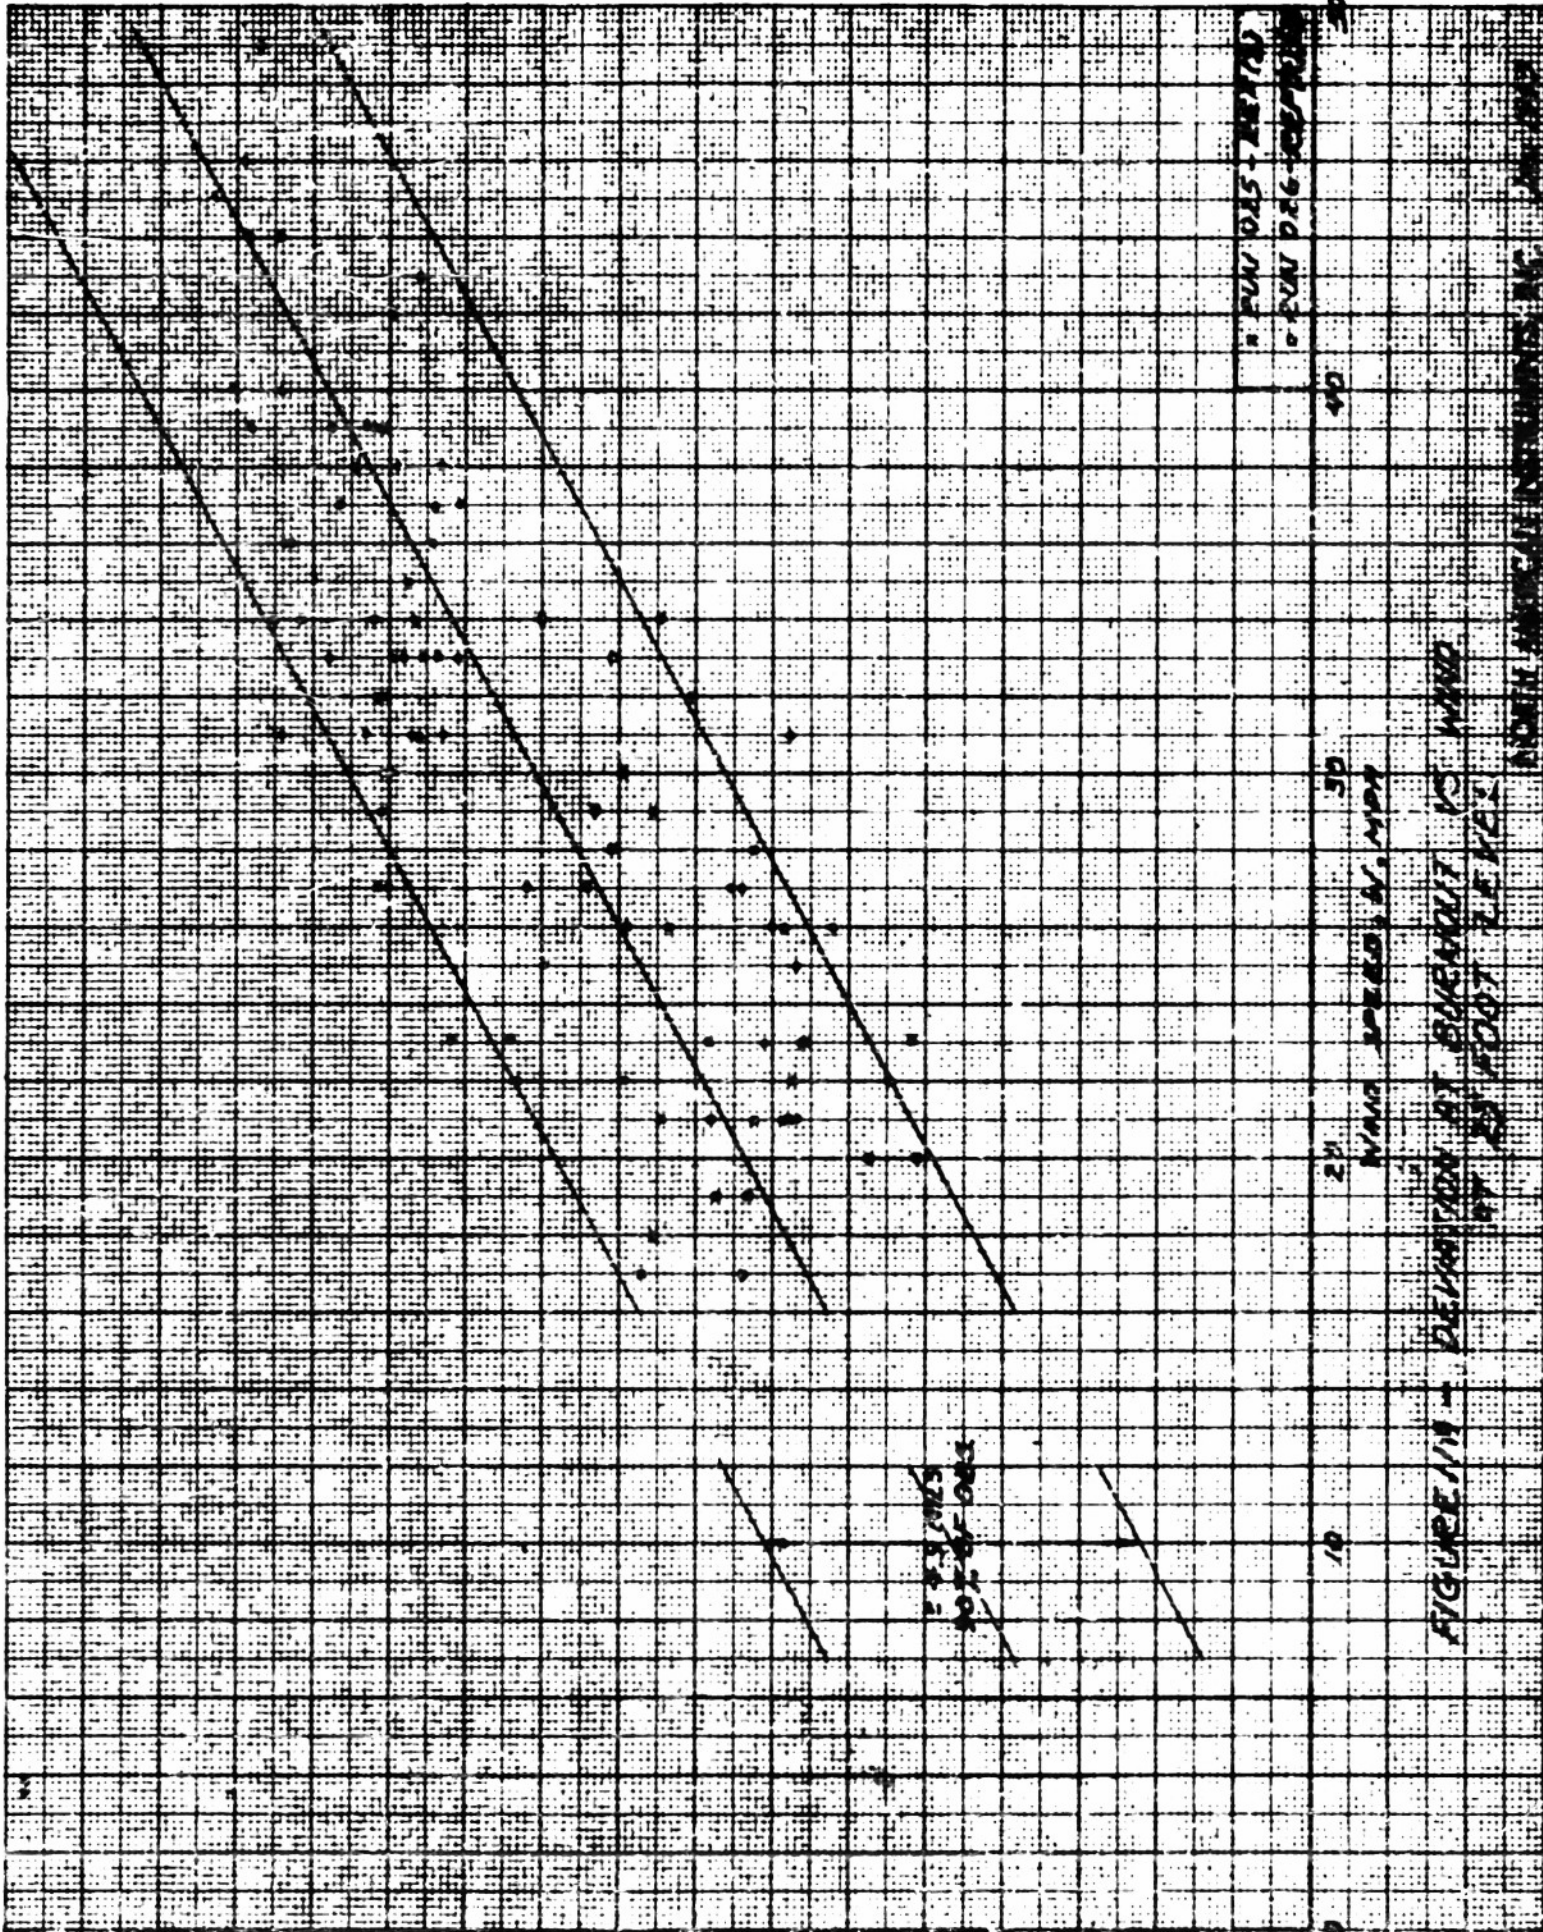


FIGURE 1/11 - DEVIATION AT BURNOUT VS WIND SPEED AT 25 FOOT LEVEL

CONFIDENTIAL

SECURITY INFORMATION

DEVIATION AT BURNOUT, 6 MILS

25.000  
10.000

10

20

30

40

50

FURN 025 - REF 1

FURN 026 - REF 2


WIND SPEED, K. MPH

DEVIATION AT BURNOUT, 6 MILS

1000

1000




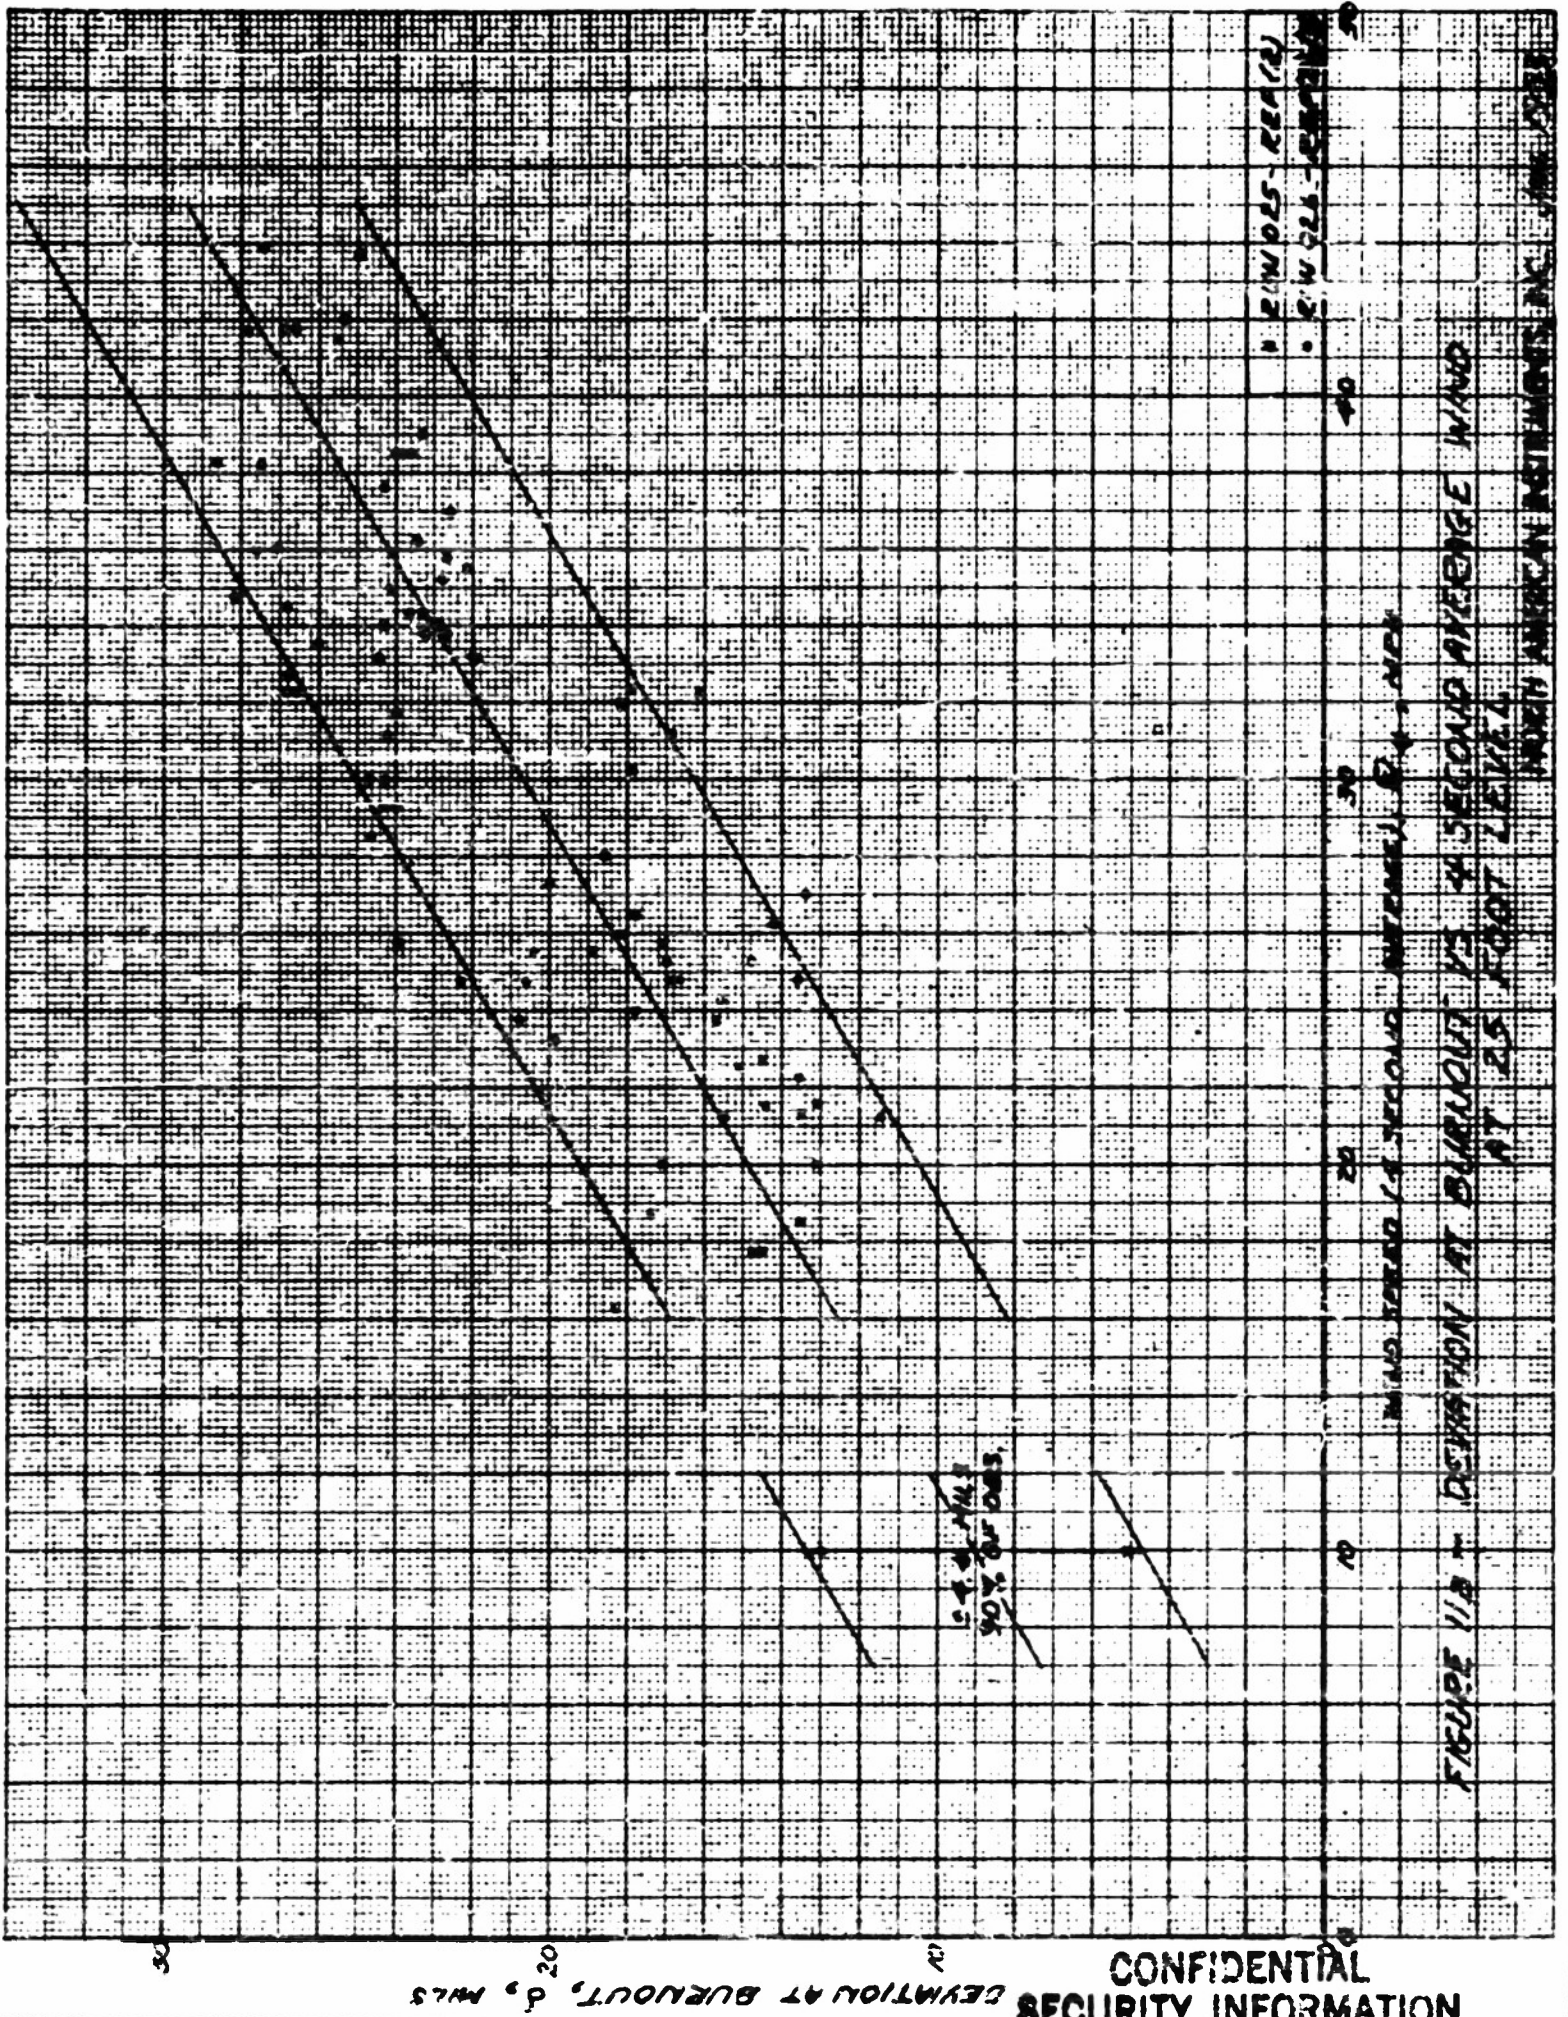




165

CONFIDENTIAL  
SECURITY INFORMATION

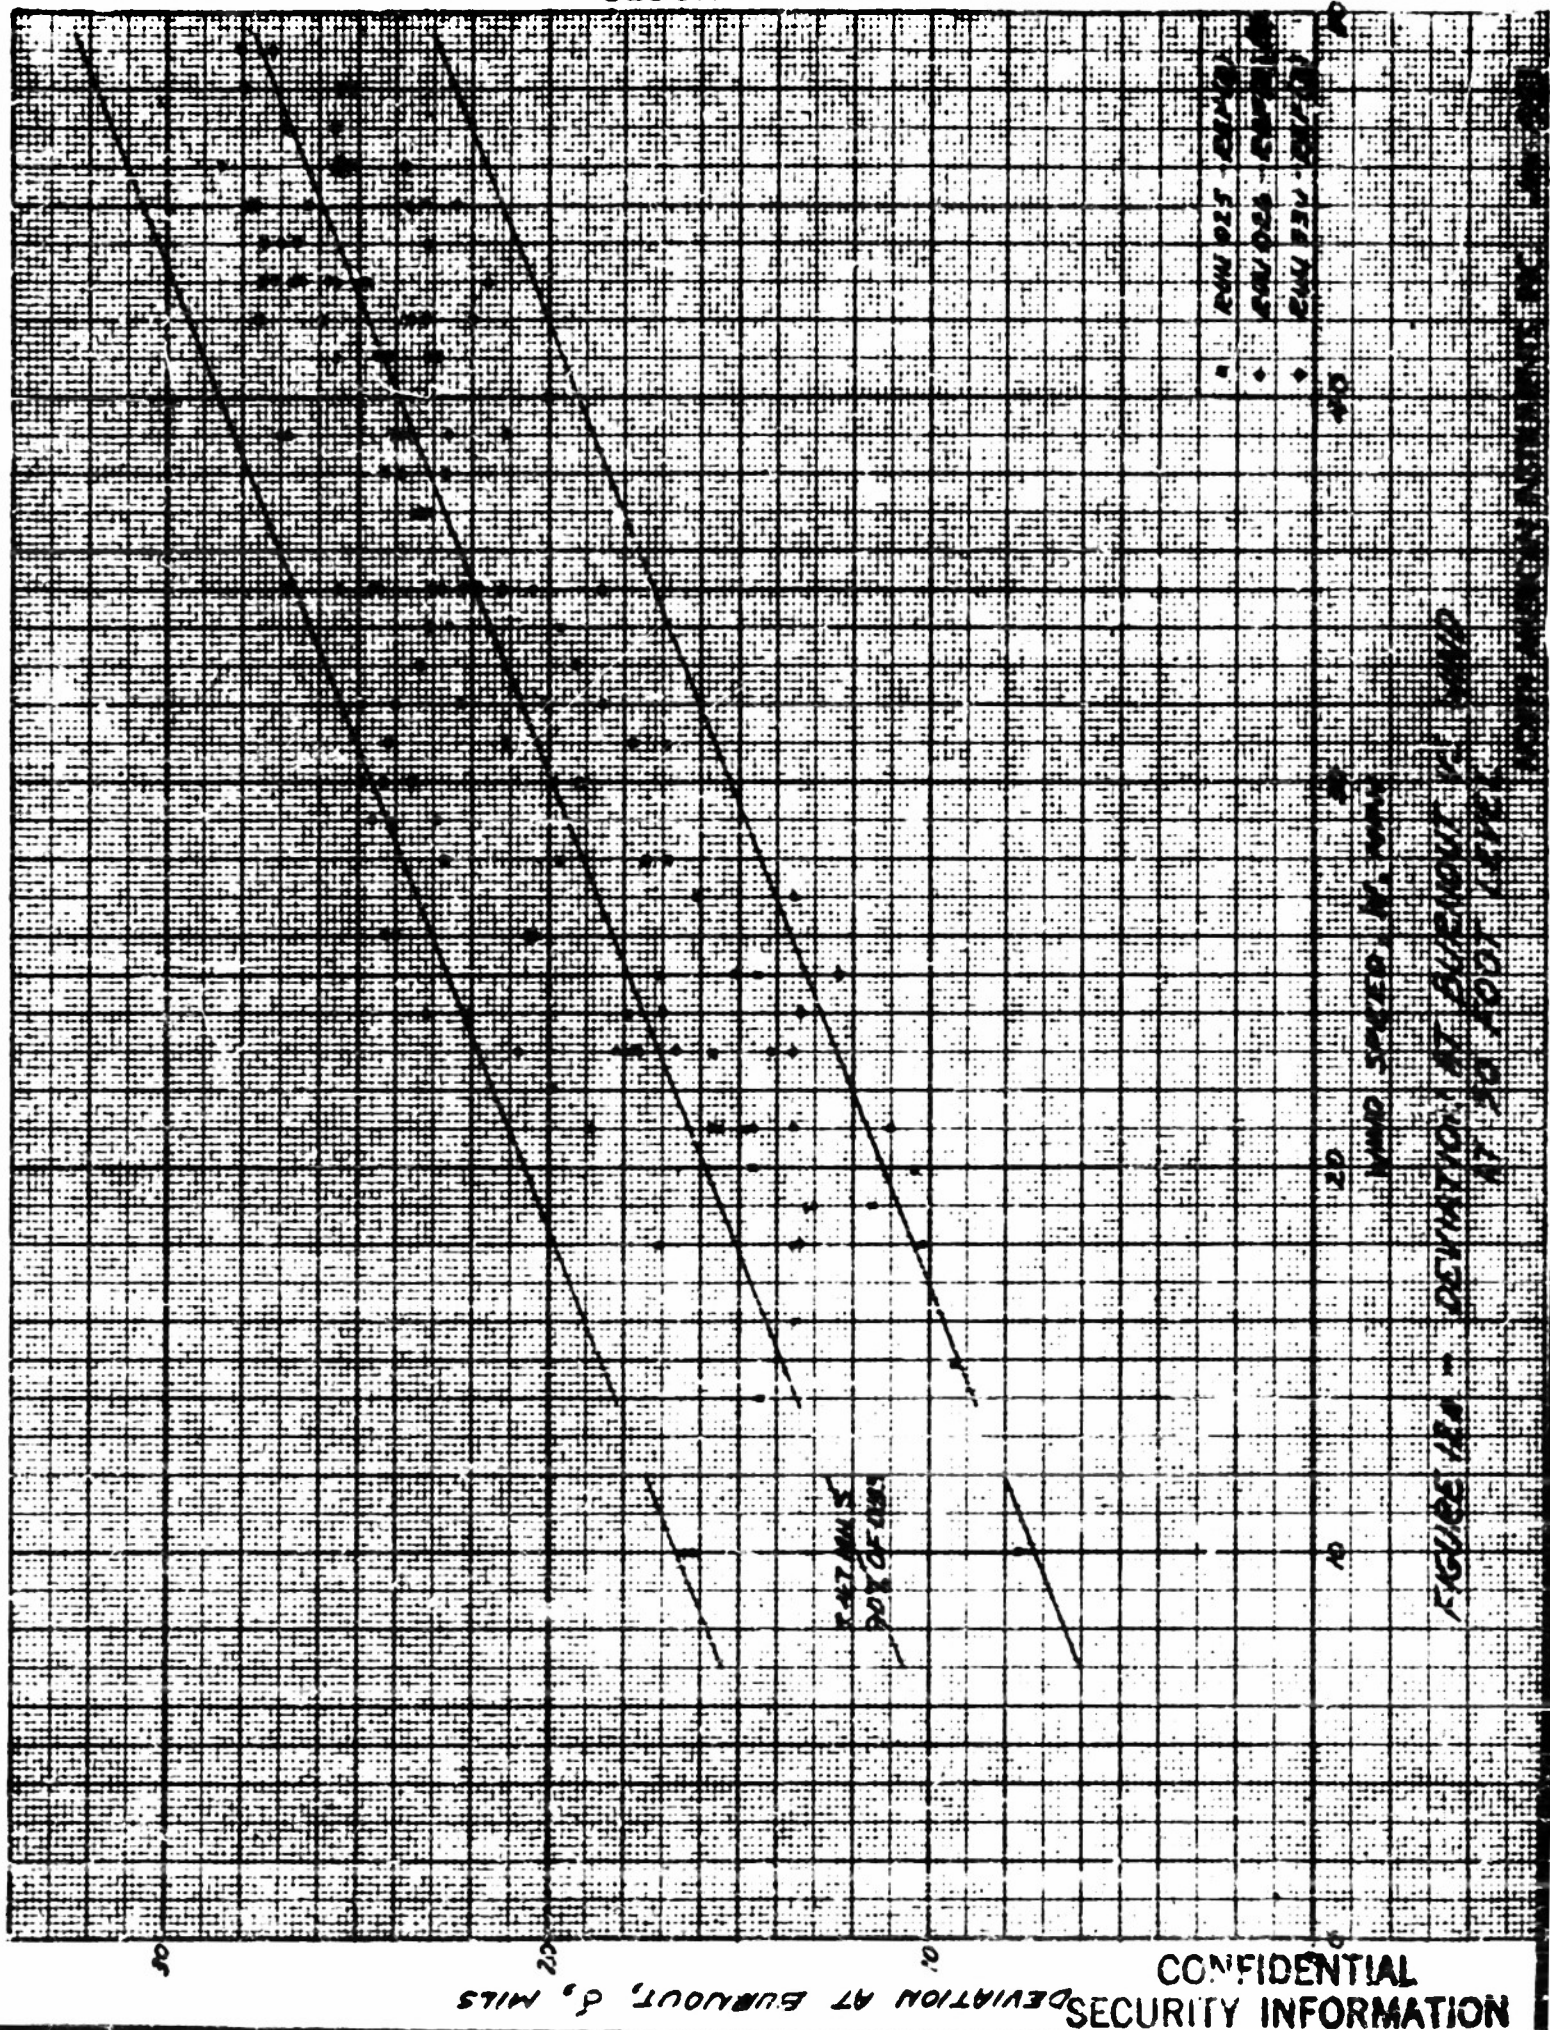

CONFIDENTIAL  
SECURITY INFORMATION




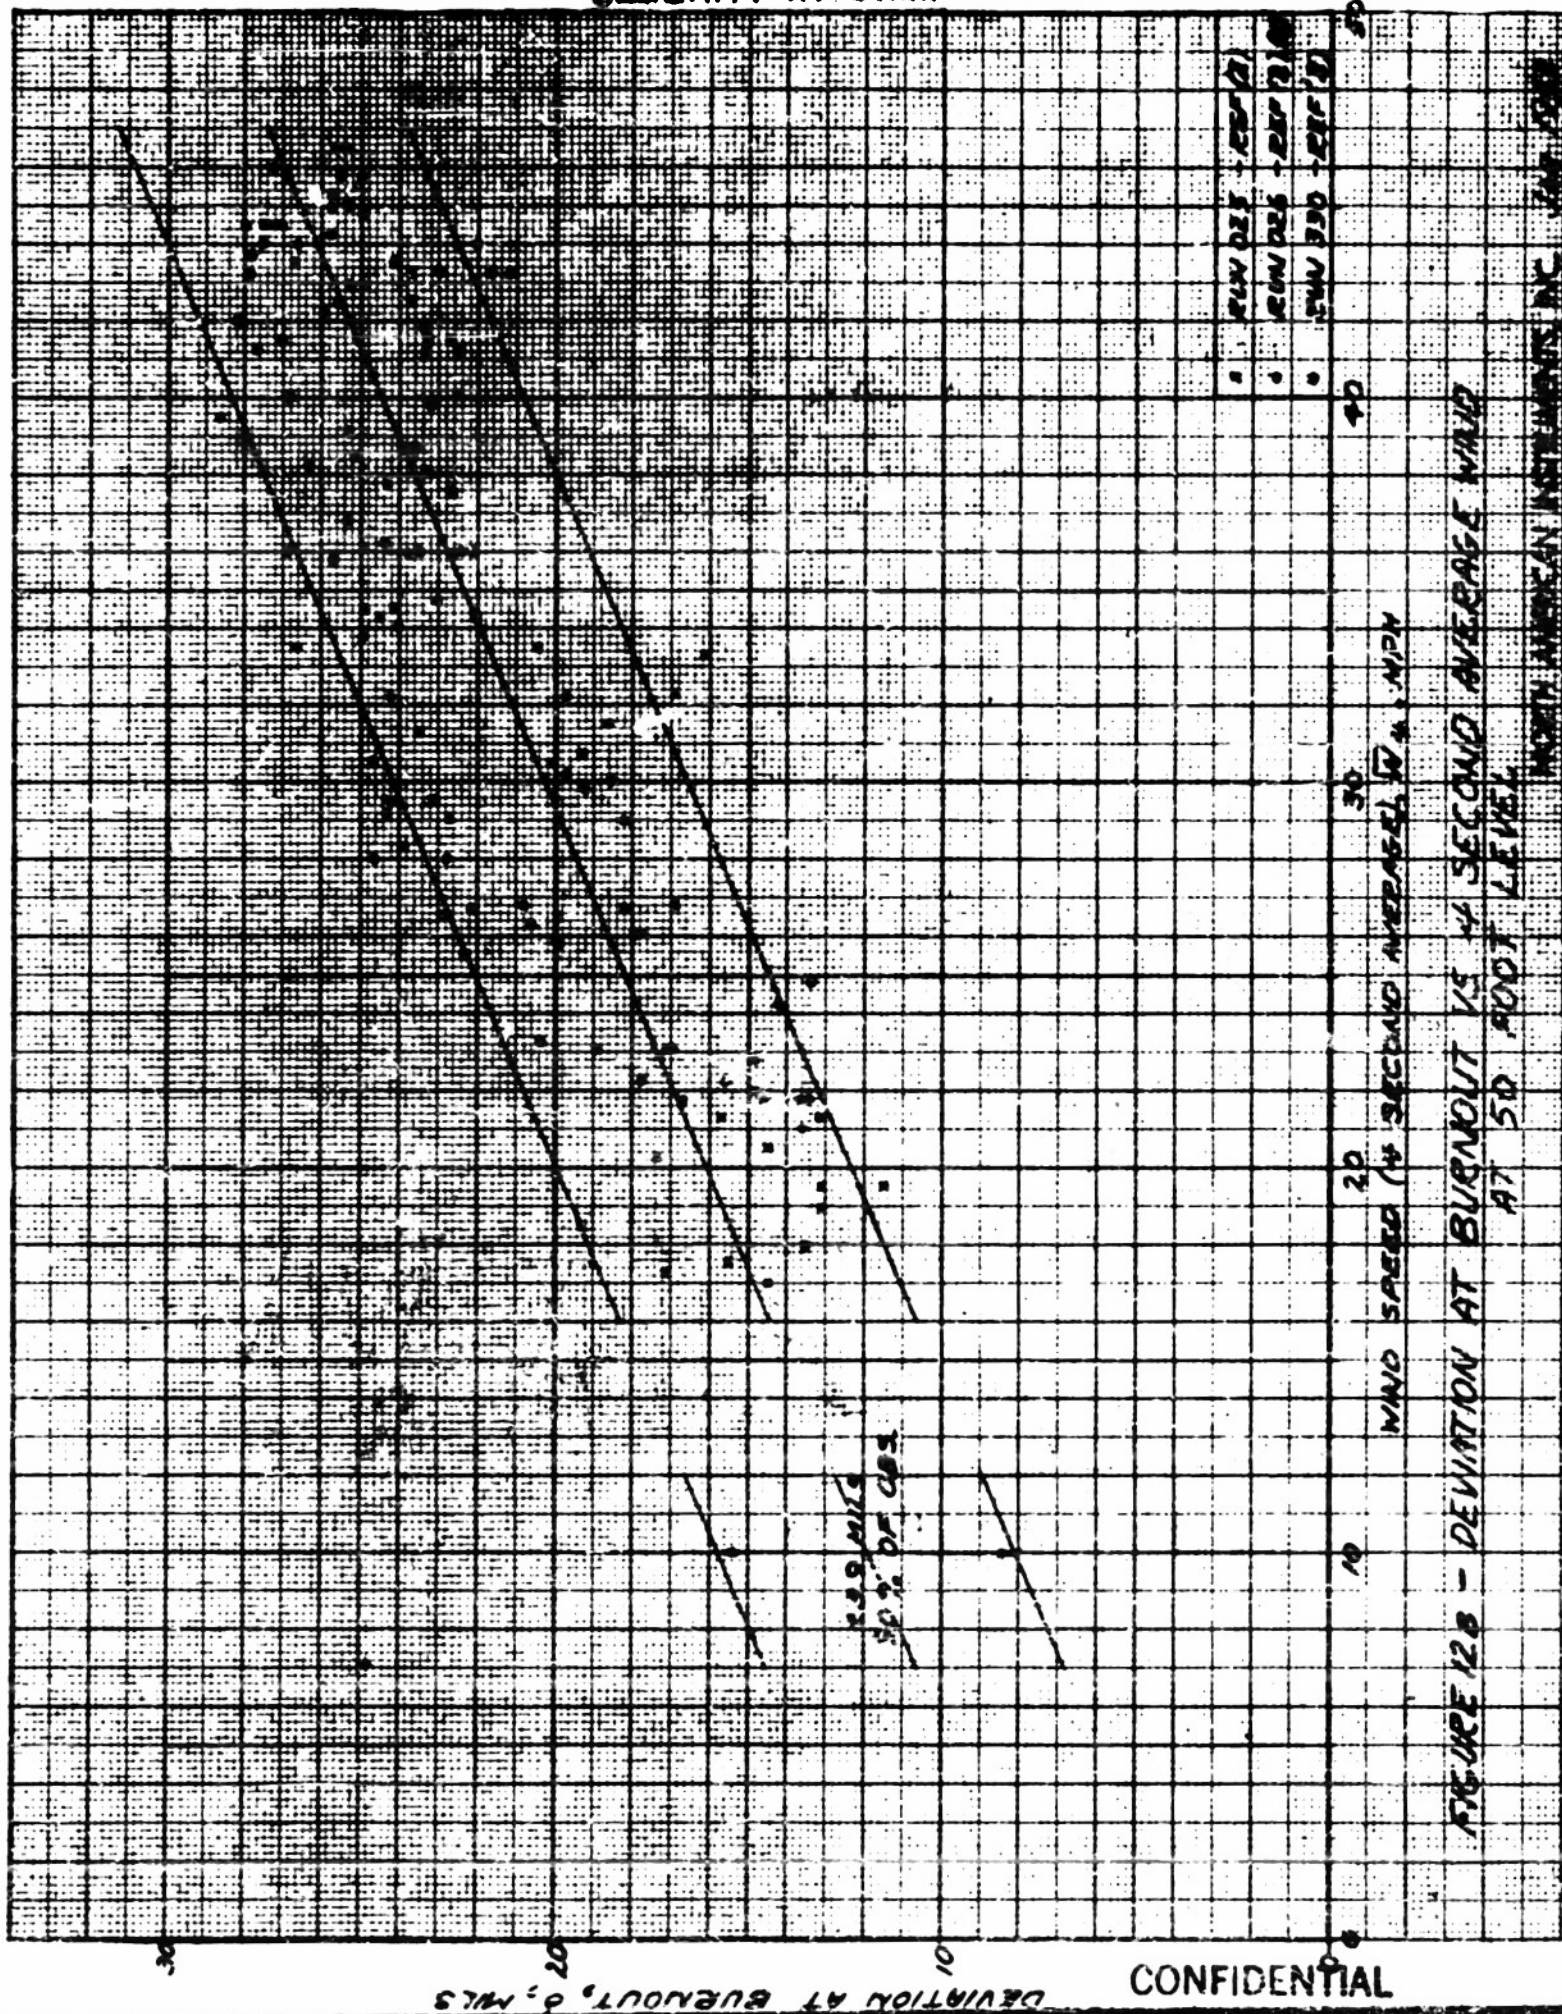



# SECURITY INFORMATION

165  
847 514

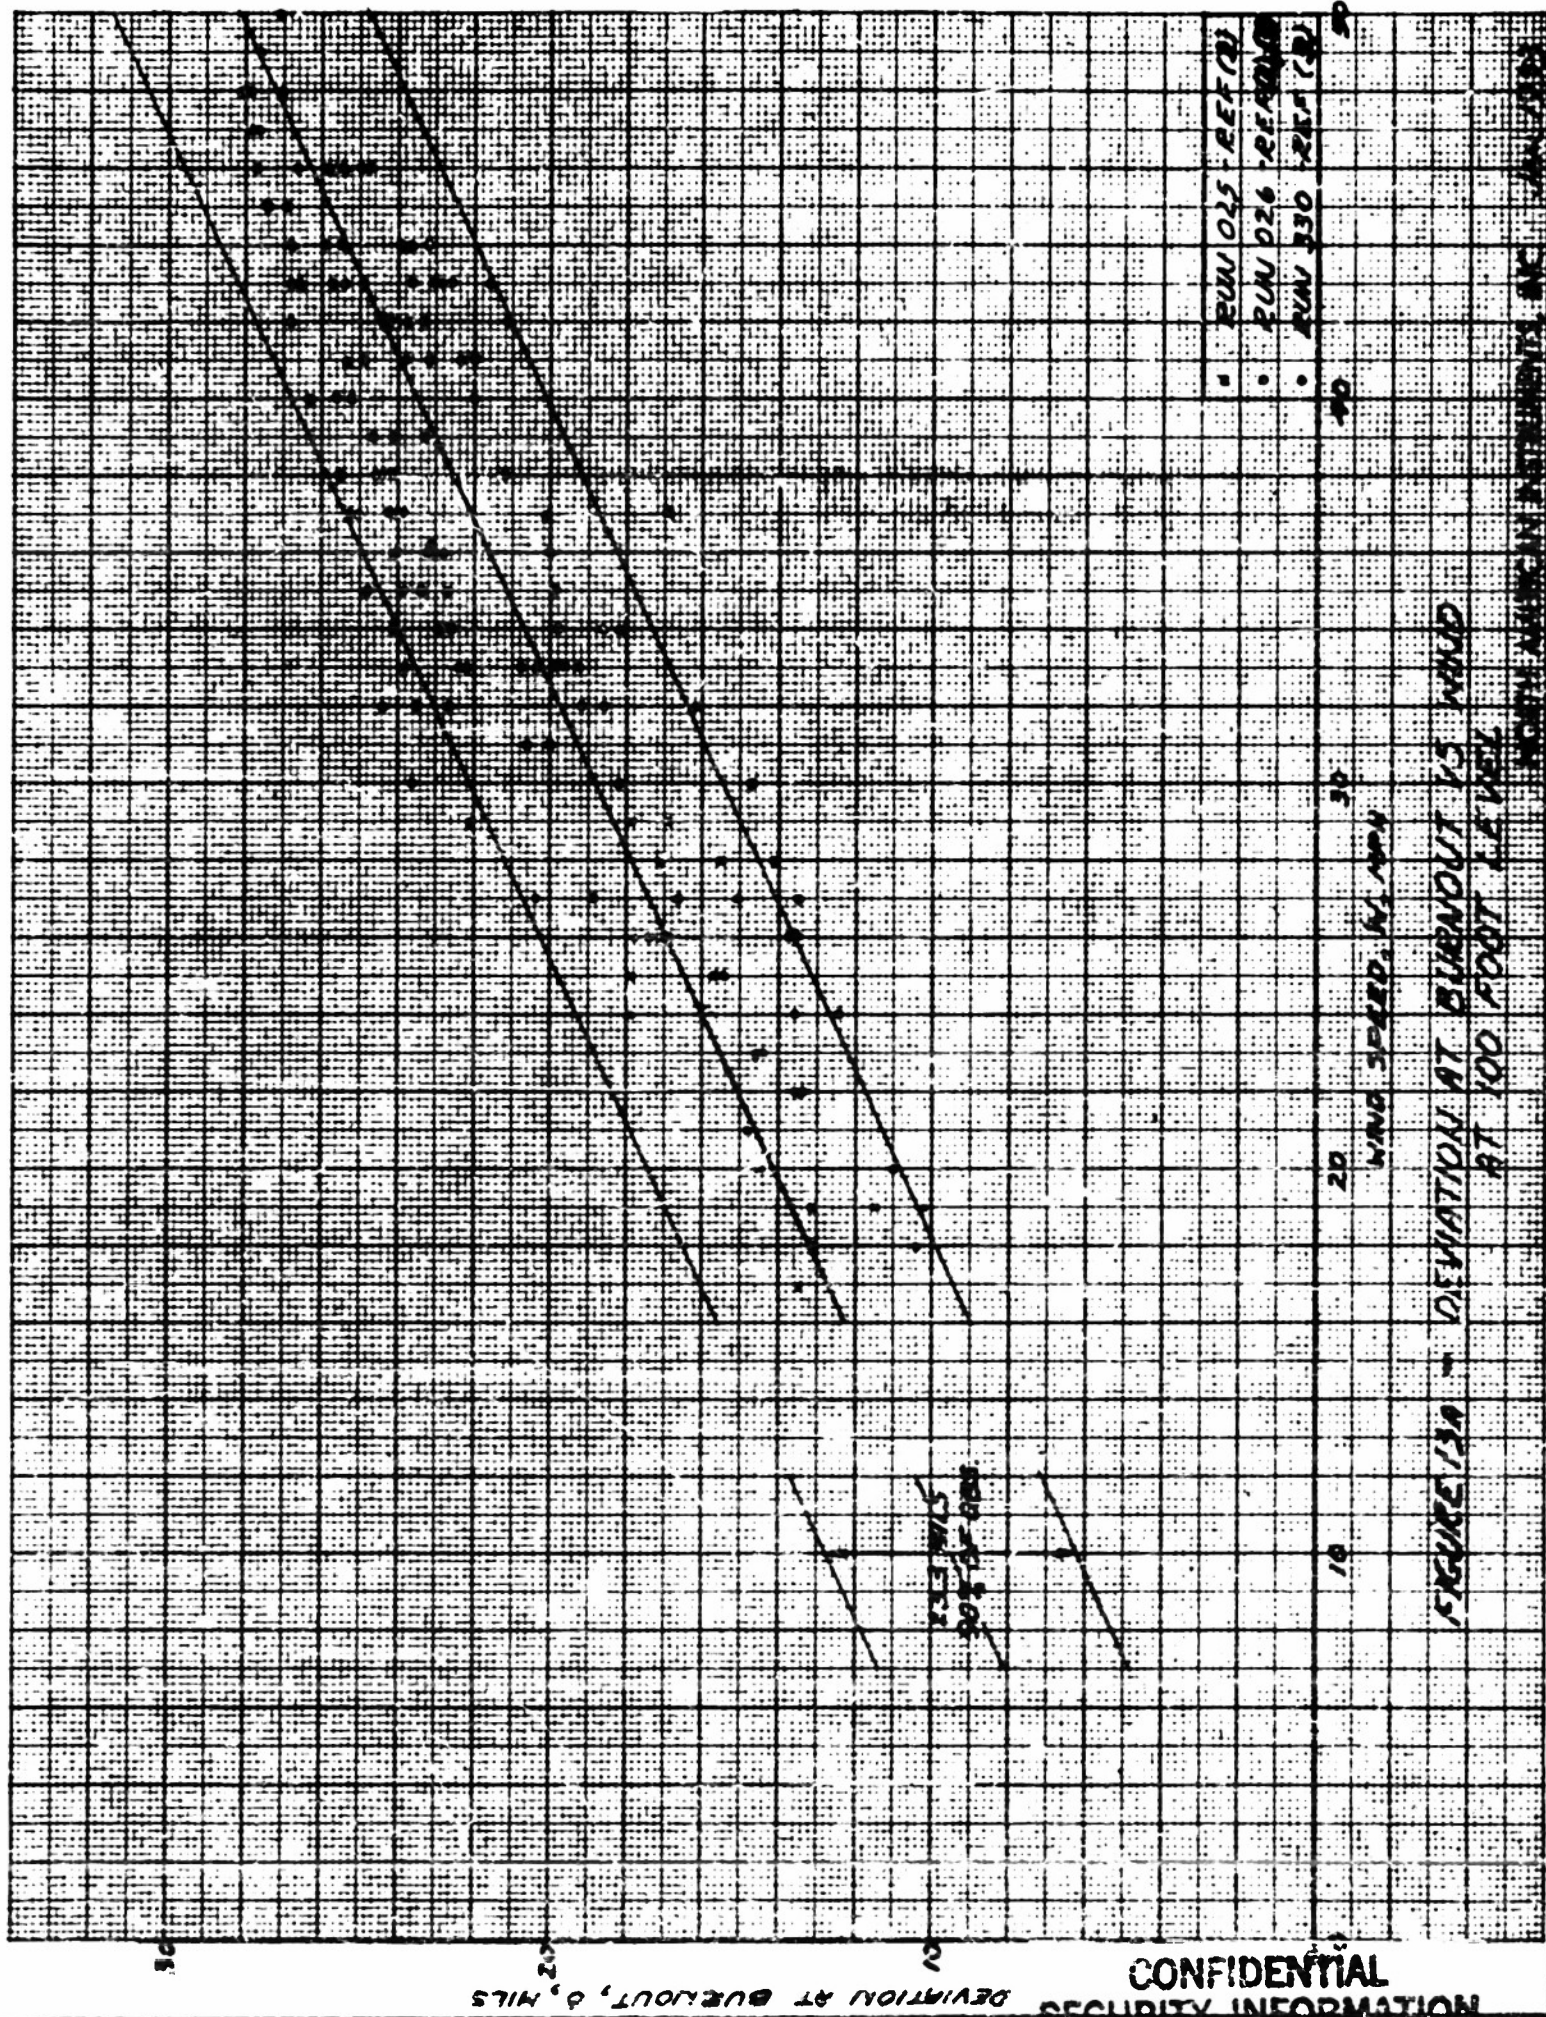

NOTATION AT BURNOUT, 0.1 MILES

CONFIDENTIAL

SECURITY INFORMATION

NOTATION AT BURNOUT, 0.1 MILES



165  
1476058


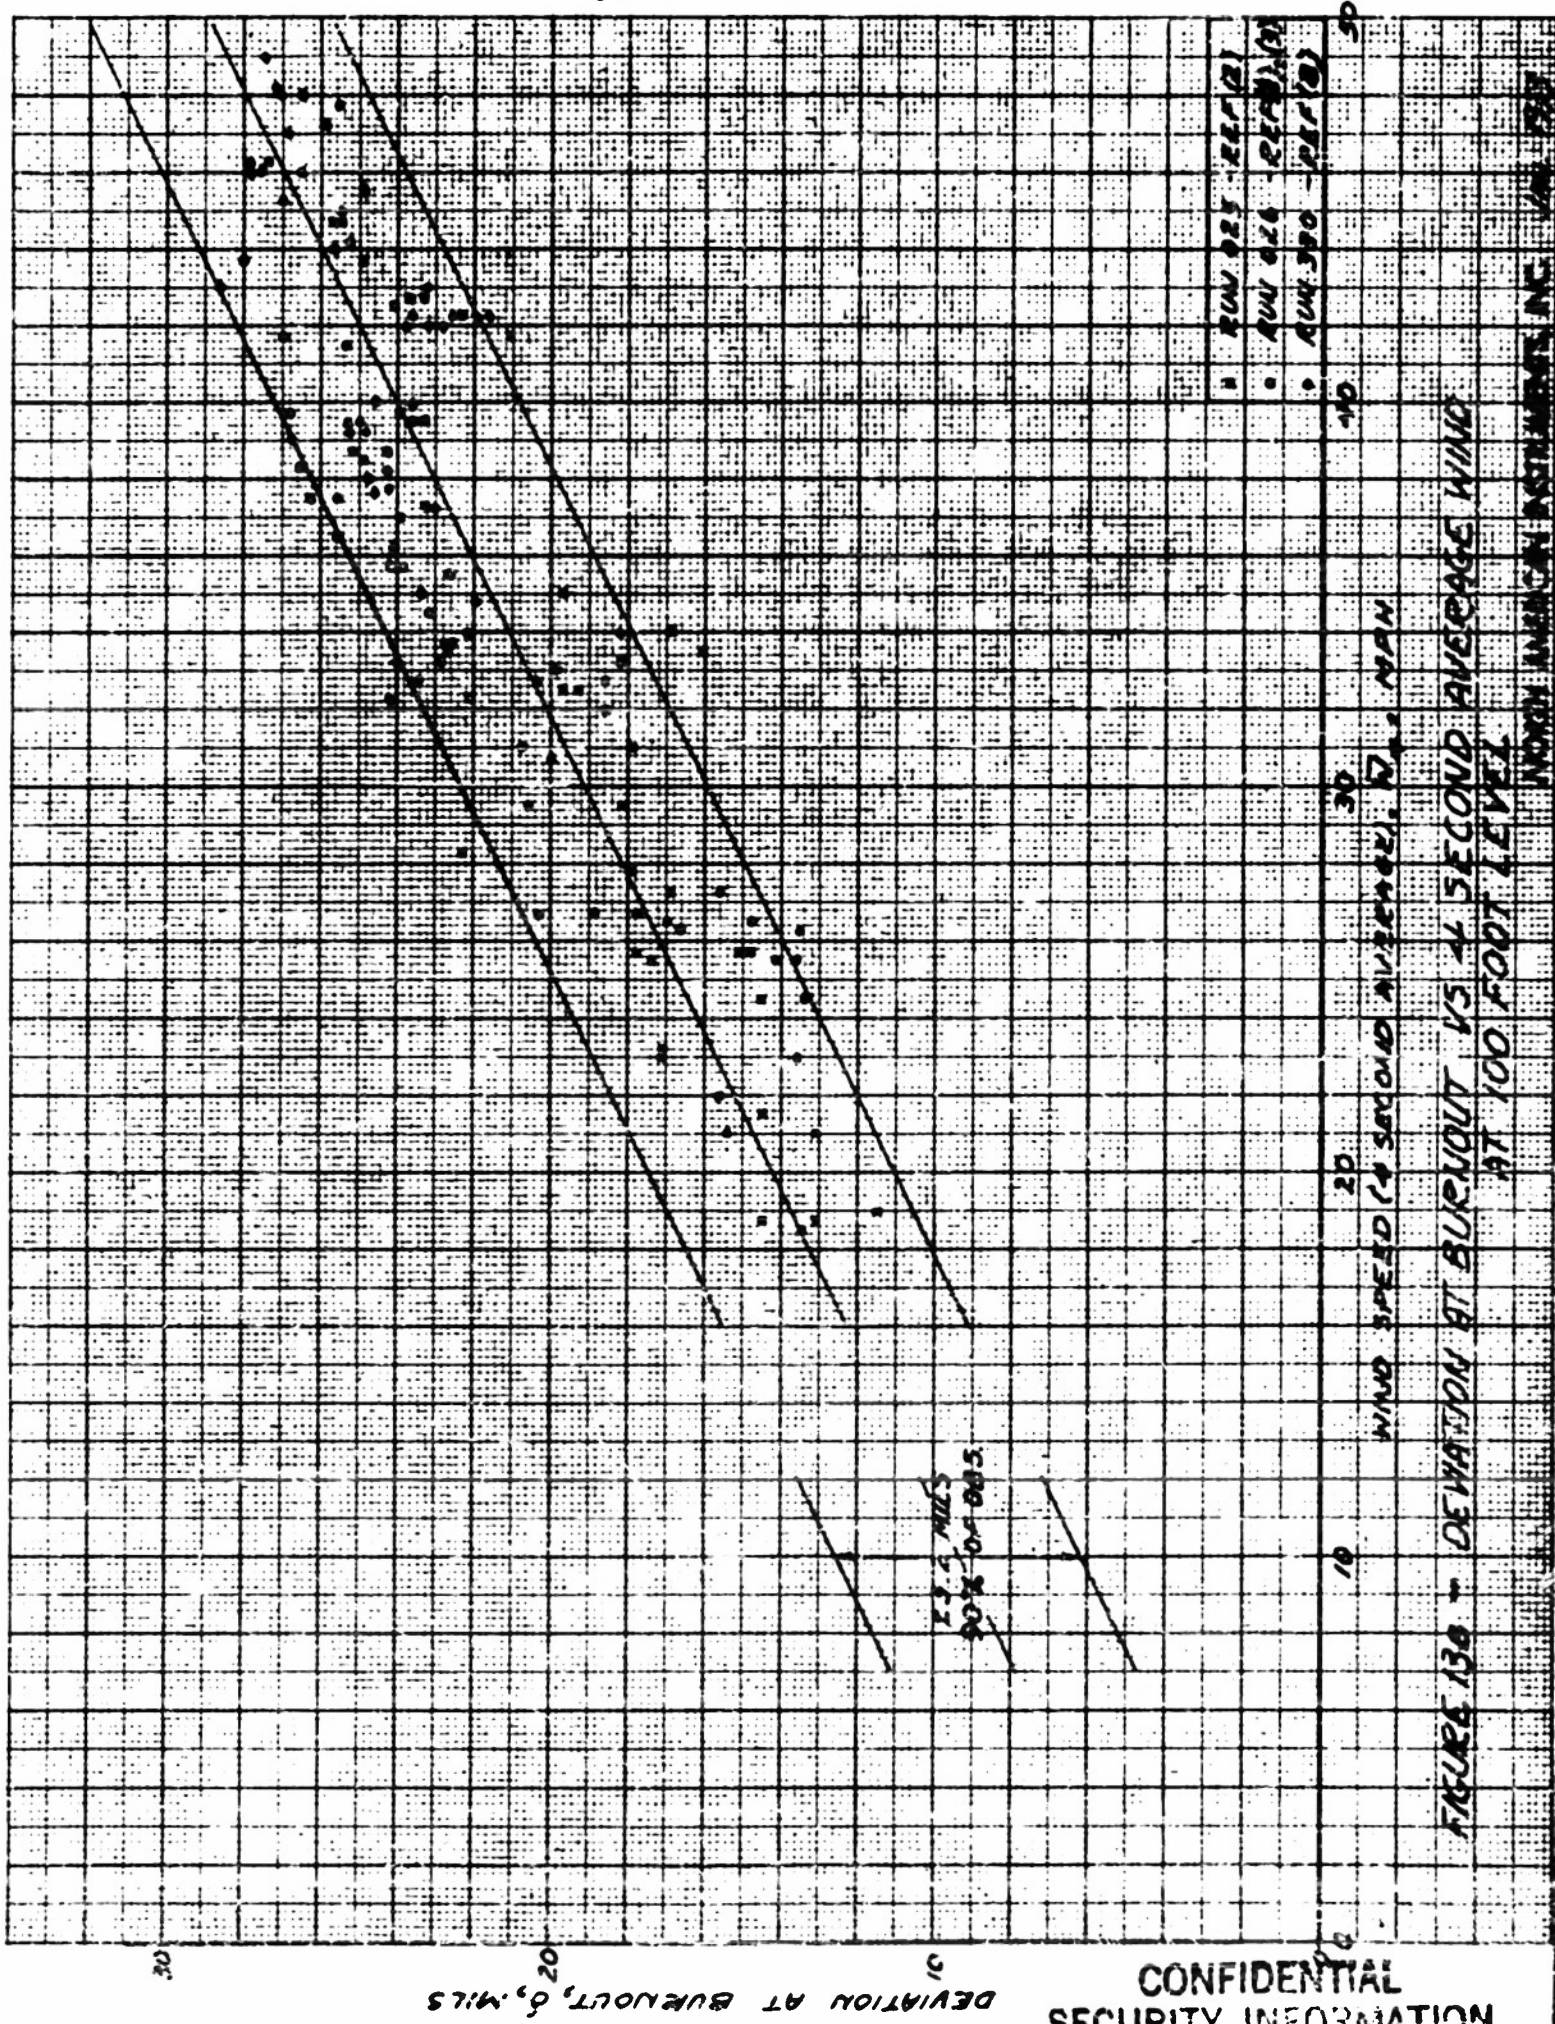



FIGURE 130 - DEVIATION AT BURNOUT VS 4 SECOND AVERAGE WIND AT 100 FOOT LEVEL

WORTH AMERICAN INSTRUMENTS, INC. 1476058

# SECURITY INFORMATION



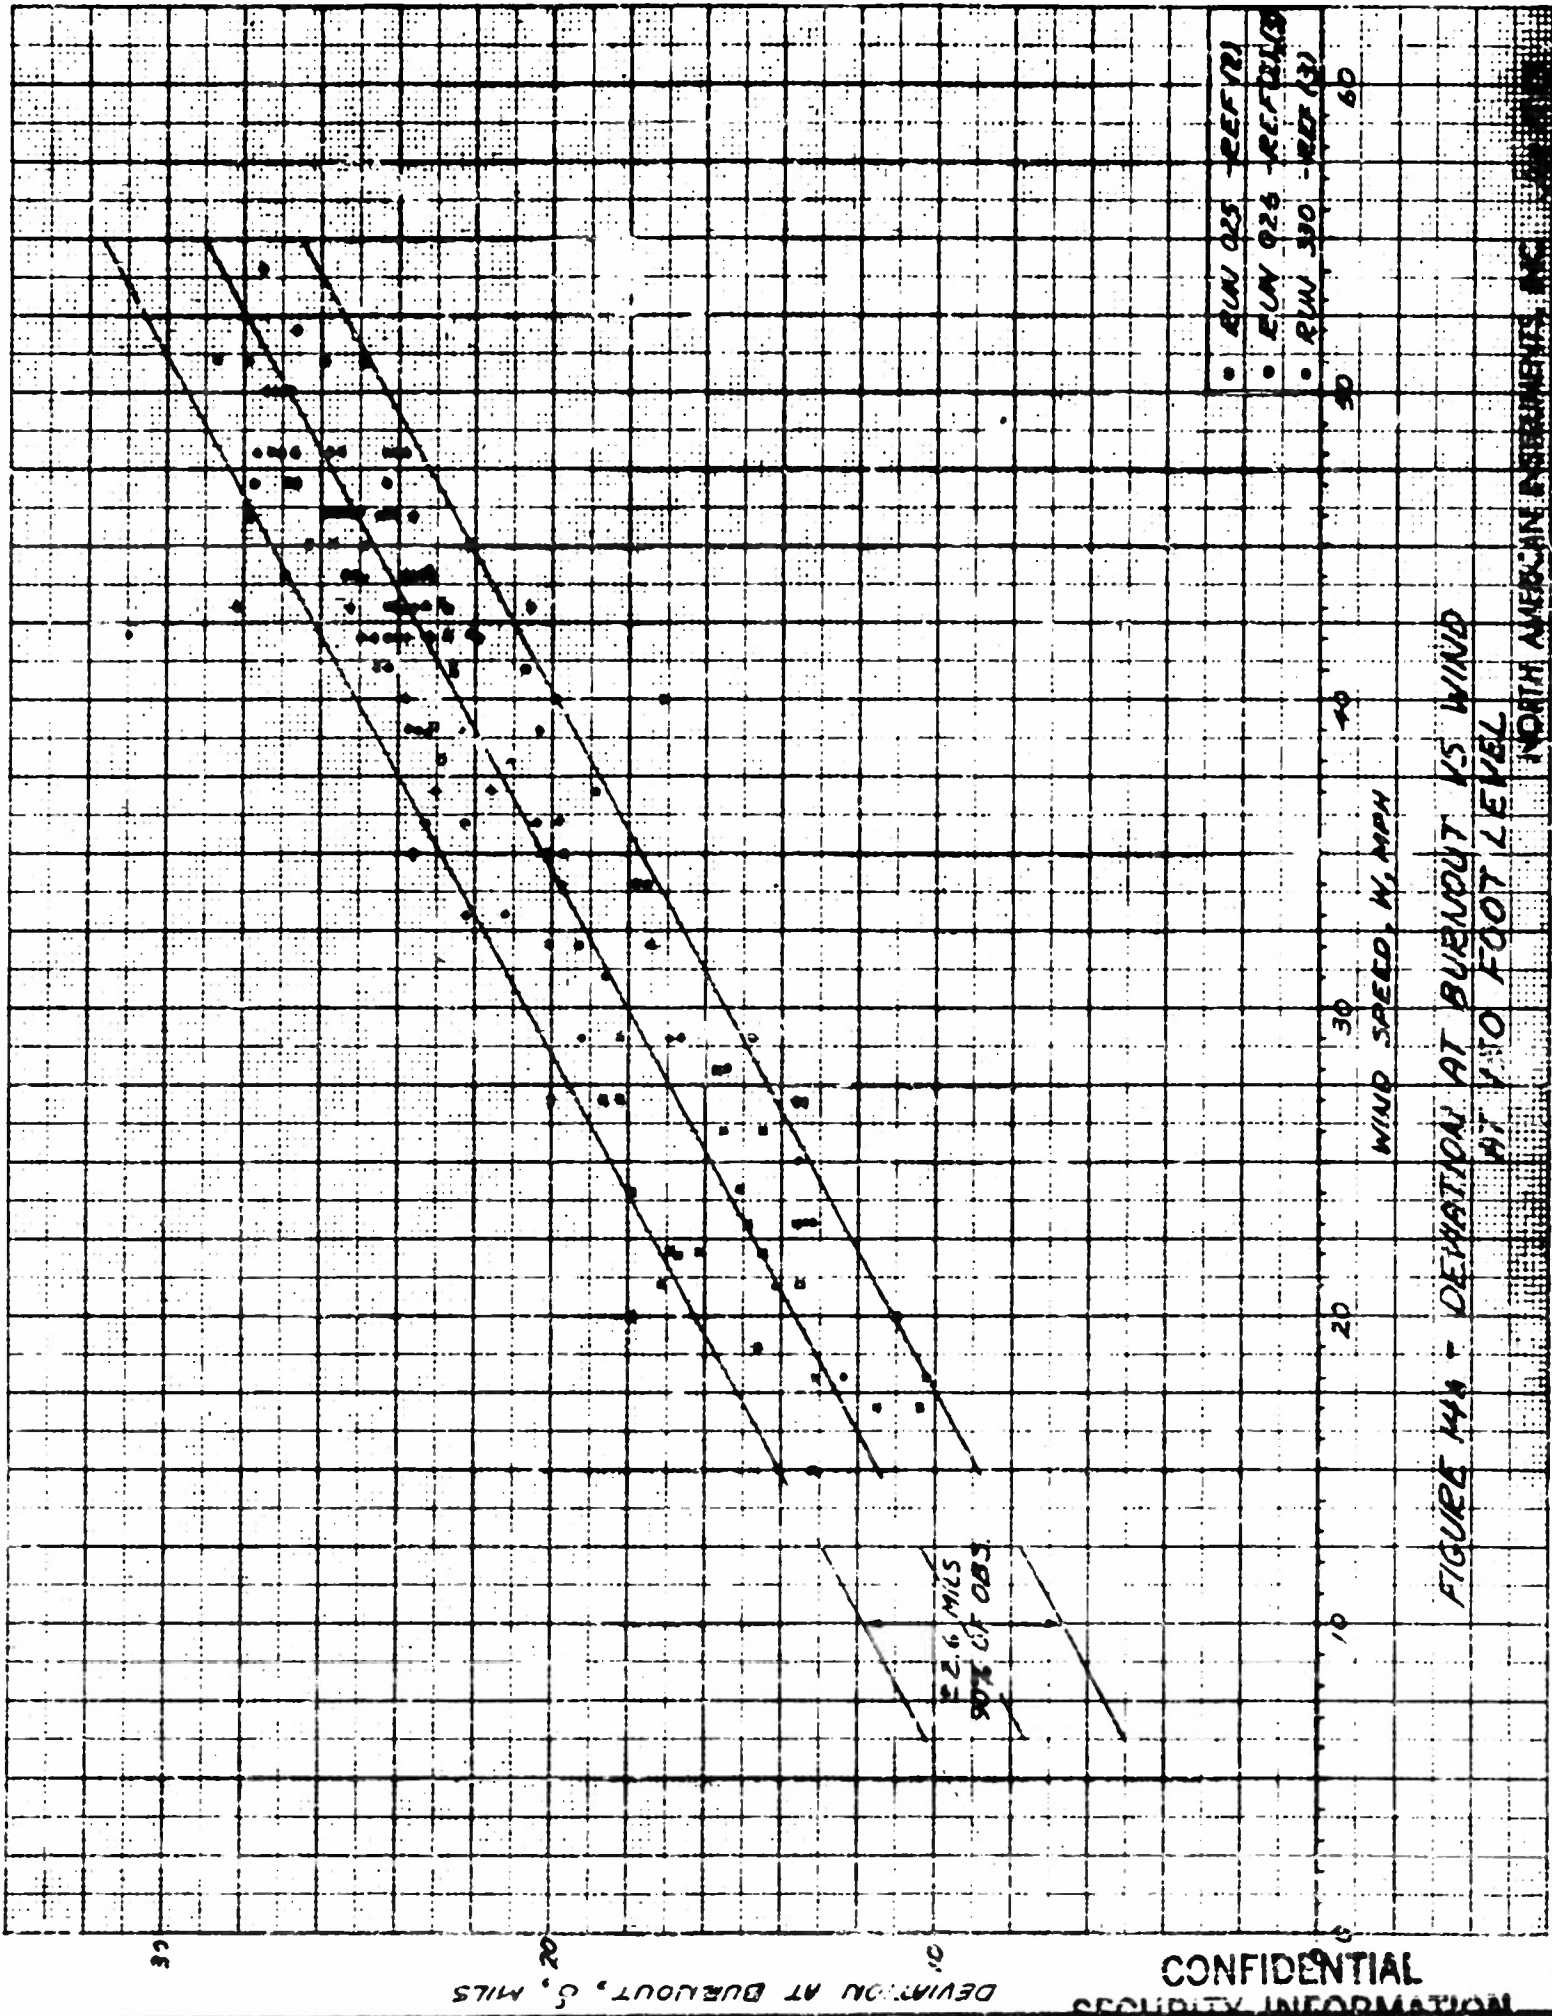

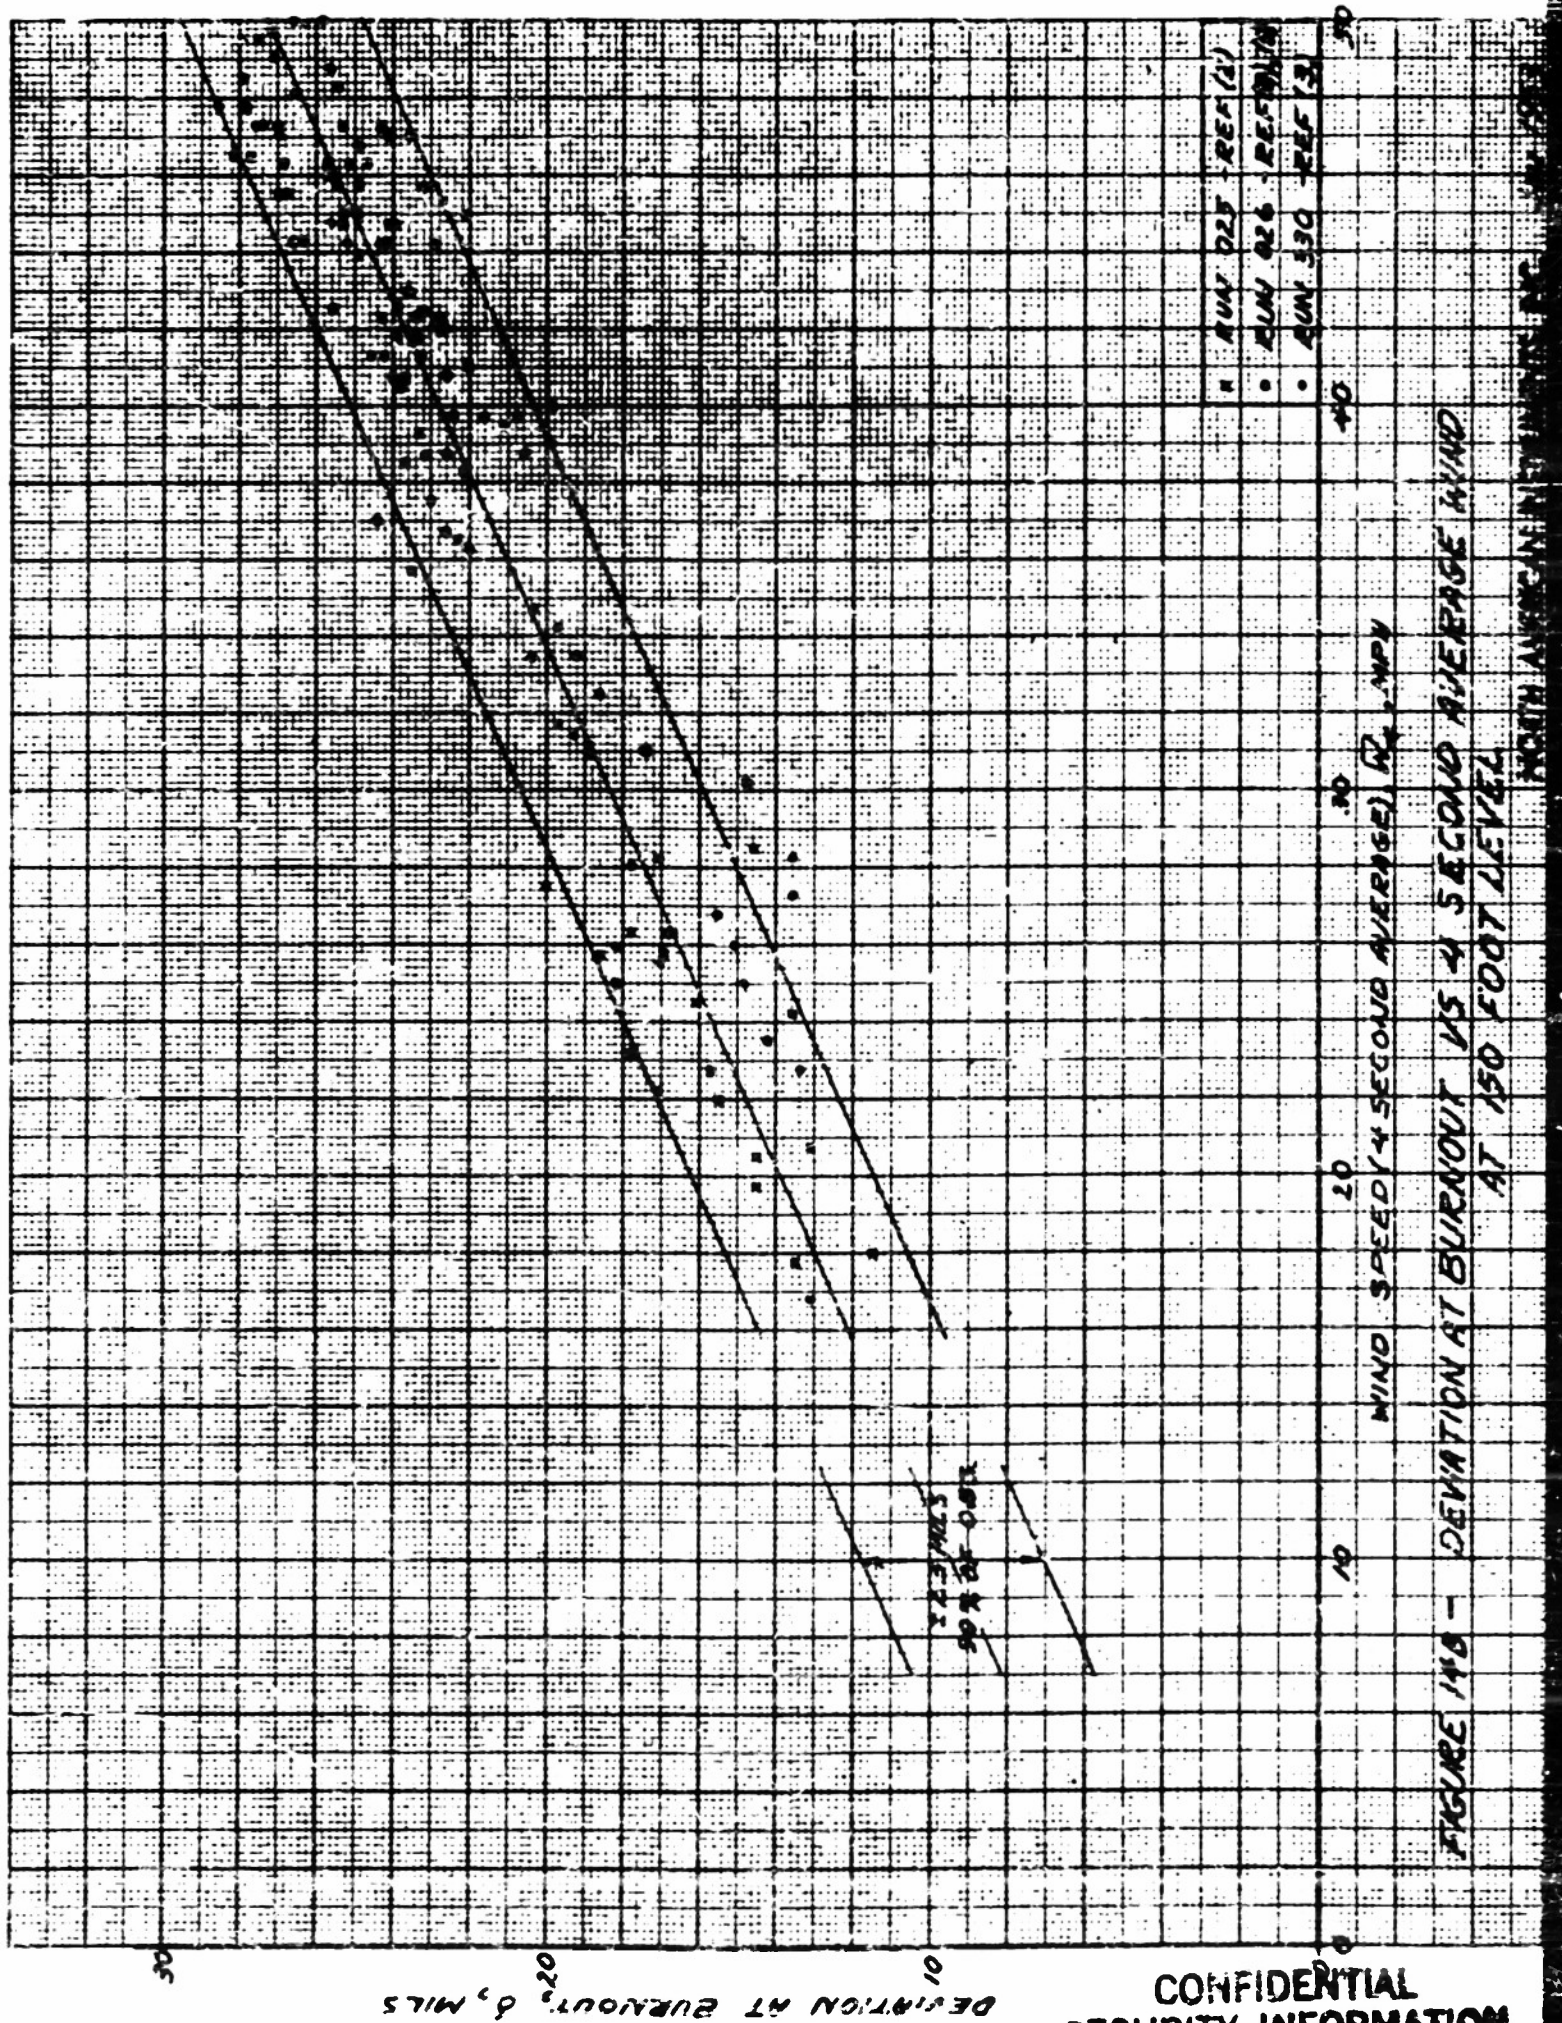



CONFIDENTIAL  
SECURITY INFORMATION

